



# ConTeXt

comenzile

# RO



# ConTeXt

## comenzile

ro / română  
10 februarie 2019



\* BEFEHL

\* NUMMER

\AMSTEX

\AmSTeX

\And

\* NUMMER

\* NUMMER

\* NUMMER

\* on dezactivat da fixat

\* CHARACTER

```
1  NAME
2  inherits: \setupcollector
```

```

1  NUMBER                                OPT
2  inaltime = max DIMENSION
   linii   = NUMBER

```

```
1  NAME
2  inherits: \definefontfeature
```

```
1 inherits: \seteazadimensiunihartieOPT
2 inherits: \seteazadimensiunihartie
```

\* NAME

\* NAME

\* PATH

```

1  TEXT
2  CSNAME

```

<p><code>\addtoJSreamble {...} {...}</code></p> <p>1 NAME</p> <p>2 CONTENT</p>
<p><code>\addvalue {...} {...}</code></p> <p>1 NAME</p> <p>2 TEXT</p>
<p><code>\adubuffer [...,*...]</code></p> <p>* BUFFER OPT</p>
<p><code>\getBUFFER</code></p>
<p><code>\adumarcaje [...]<sup>1</sup> [...]<sup>2</sup> [...]<sup>3</sup></code></p> <p>1 BESCHRIFTUNG OPT OPT</p> <p>2 pagina NAME</p> <p>3 primul ultim curent precedent urmatorul sus subsol implicit ambele tot first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck</p>
<p><code>\afiseazaaspect [...,*...]</code></p> <p>* pt bp cm mm dd cc pc <sup>OPT</sup>nc sp in</p>
<p><code>\afiseazaculoare [...]</code></p> <p>* COLOR</p>
<p><code>\afiseazafonttext [...,*...]</code></p> <p>* inherits: \seteazafonttext</p>
<p><code>\afiseazagrid [...,*...]</code></p> <p>* reset subsol sus <sup>OPT</sup>ni<sup>OPT</sup>funul tot linii incadrat nonumber dreapta stanga extern intern coloane</p>
<p><code>\afiseazagrupculoare [...]<sup>1</sup> [...]<sup>2</sup>,...]</code></p> <p>1 NAME OPT</p> <p>2 orizontal vertical numar valoare nume</p>
<p><code>\afiseazamakeup [...]</code></p> <p>* marcaj reset boxes <sup>OPT</sup>t<sup>OPT</sup> hbox vbox vtop kern glue penalty fontkern strut whatsit glyph simple simplehbox simplevbox simplevtop user math italic origin discretionary expansion linie spatiu adancime</p>
<p><code>\afiseazamediufonttext [...,*...]</code></p> <p>* inherits: \seteazafonttext</p>
<p><code>\afiseazapaleta [...]<sup>1</sup> [...]<sup>2</sup>,...]</code></p> <p>1 NAME OPT</p> <p>2 orizontal vertical numar valoare nume</p>
<p><code>\afiseazarama [...]<sup>1</sup>,... [...]<sup>2</sup>,...]</code></p> <p>1 sus antet text <sup>OPT</sup>subsol<sup>OPT</sup> subsol OPT</p> <p>2 bordurastanga marginestanga text marginedreapta borduradreapta</p>
<p><code>\afiseazasetari [...,*...]</code></p> <p>* pt bp cm mm dd cc pc <sup>OPT</sup>nc<sup>OPT</sup> sp in</p>
<p><code>\afiseazasetsimboluri [...]</code></p> <p>* NAME</p>
<p><code>\afiseazastruts</code></p>

<p><code>\afiseazatiparire [...<sup>1</sup>,...] [...<sup>2</sup>,...] [...<sup>3</sup>,...]</code></p> <p>1 inherits: \seteazadimensiunihartie <small>OPT</small></p> <p>2 inherits: \seteazadimensiunihartie</p> <p>3 inherits: \seteazaaspect</p>
<p><code>\aftersplitstring ... \at ... \to ...</code></p> <p>1 TEXT</p> <p>2 TEXT</p> <p>3 CSNAME</p>
<p><code>\aftertestandsplitstring ... \at ... \to ...</code></p> <p>1 TEXT</p> <p>2 TEXT</p> <p>3 CSNAME</p>
<p><code>\aldin</code></p>
<p><code>\aldininclinat</code></p>
<p><code>\aldinitalic</code></p>
<p><code>\alignbottom</code></p>
<p><code>\aligned [...<sup>1</sup>,...] {...<sup>2</sup>}</code></p> <p>1 stanga centru dreapta sus subsol linie l c r m t b g</p> <p>2 CONTENT</p>
<p><code>\alignedbox [...<sup>1</sup>,...] ...<sup>2</sup> {...<sup>3</sup>}</code></p> <p>1 stanga centru dreapta sus subsol linie l c r m t b g</p> <p>2 CSNAME</p> <p>3 CONTENT</p>
<p><code>\alignedline {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>}</code></p> <p>1 stanga dreapta centru flushleft flushright center max intern extern innermargin outermargin inneredge outeredge spatiuspate cutspace marginestanga marginedreapta bordurastanga borduradreapta</p> <p>2 stanga dreapta centru flushleft flushright center max intern extern innermargin outermargin inneredge outeredge spatiuspate cutspace marginestanga marginedreapta bordurastanga borduradreapta</p> <p>3 CONTENT</p>
<p><code>\alignhere</code></p>
<p><code>\alignmentcharacter</code></p>
<p><code>\aliniatcentru {...}</code></p> <p>* CONTENT</p>
<p><code>\aliniatdreapta {...}</code></p> <p>* CONTENT</p>
<p><code>\aliniatstanga {...}</code></p> <p>* CONTENT</p>
<p><code>\allinputpaths</code></p>
<p><code>\alphabeticnumerals {...}</code></p> <p>* NUMMER</p>

**\alwayscitation** [ $\dots^1\dots$ ] [ $\dots^2$ ]

```
1  referinta = REFERENCEOPT
   alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
               authoryear
   inainte   = BEFEHL
   dupa      = BEFEHL
   stanga    = BEFEHL
   dreapta   = BEFEHL
   inherits: \setupbtx
2  REFERENCE
```

**\alwayscitation** [ $\dots^1$ ] [ $\dots^2$ ]

```
1  implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2  REFERENCE
```

**\alwayscitation** [ $\dots^1\dots$ ] [ $\dots^2\dots$ ]

```
1  referinta = REFERENCE
   alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
               authoryear
   inainte   = BEFEHL
   dupa      = BEFEHL
   stanga    = BEFEHL
   dreapta   = BEFEHL
   inherits: \setupbtx
2  KEY = VALUE
```

**\alwayscite** [ $\dots^1\dots$ ] [ $\dots^2$ ]

```
1  referinta = REFERENCEREFN
   alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
               authoryear
   inainte   = BEFEHL
   dupa      = BEFEHL
   stanga    = BEFEHL
   dreapta   = BEFEHL
   inherits: \setupbtx
2  REFERENCE
```

**\alwayscite** [ $\dots^1$ ] [ $\dots^2$ ]

```
1  implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2  REFERENCE
```

**\alwayscite** [ $\dots^1\dots$ ] [ $\dots^2\dots$ ]

```
1  referinta = REFERENCE
   alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
               authoryear
   inainte   = BEFEHL
   dupa      = BEFEHL
   stanga    = BEFEHL
   dreapta   = BEFEHL
   inherits: \setupbtx
2  KEY = VALUE
```

**\ampersand**

**\anchor** [ $\dots^1$ ] [ $\dots^2\dots$ ] [ $\dots^3\dots$ ] [ $\dots^4$ ]

```
1  NAMEOPT
2  inherits: \setuplayer
3  inherits: \setuplayerinherits: \seteazainconjurat
4  CONTENT
```

**\appendetoks**  $\dots^1$  \to  $\dots^2$

```
1  BEFEHL
2  CSNAME
```

**\appendgvalue** [ $\dots^1$ ] [ $\dots^2$ ]

```
1  NAME
2  BEFEHL
```



<code>\appendtocommalist {...} \^2...</code> 1 TEXT 2 CSNAME
<code>\appendtoks \^1... \to \^2...</code> 1 BEFEHL 2 CSNAME
<code>\appendtoksonce \^1... \to \^2...</code> 1 BEFEHL 2 CSNAME
<code>\appendvalue {...} {...}</code> 1 NAME 2 BEFEHL
<code>\apply {...} {...}</code> 1 CONTENT 2 CONTENT
<code>\applyalternativestyle {...}</code> * NAME
<code>\applyprocessor {...} {...}</code> 1 NAME 2 CONTENT
<code>\applytocharacters \^1... {...}</code> 1 CSNAME 2 TEXT
<code>\applytofirstcharacter \^1... {...}</code> 1 CSNAME 2 TEXT
<code>\applytosplitstringchar \^1... {...}</code> 1 CSNAME 2 TEXT
<code>\applytosplitstringcharspaced \^1... {...}</code> 1 CSNAME 2 TEXT
<code>\applytosplitstringline \^1... {...}</code> 1 CSNAME 2 TEXT
<code>\applytosplitstringlinespaced \^1... {...}</code> 1 CSNAME 2 TEXT
<code>\applytosplitstringword \^1... {...}</code> 1 CSNAME 2 TEXT
<code>\applytosplitstringwordspaced \^1... {...}</code> 1 CSNAME 2 TEXT

<code>\applytowords \<sup>1</sup>... {<sup>2</sup>...}</code> 1 CSNAME 2 TEXT
<code>\arabicdecimals {...}</code> * NUMBER
<code>\arabicexnumerals {...}</code> * NUMBER
<code>\arabicnumerals {...}</code> * NUMBER
<code>\arg {<sup>*</sup>...}</code> * CONTENT
<code>\asciistr {...}</code> * CONTENT
<code>\ascundeblocuri [...,<sup>1</sup>...] [...,<sup>2</sup>...]</code> 1 NAME 2 NAME OPT
<code>\assignfadiimension {<sup>1</sup>...} \<sup>2</sup>... {<sup>3</sup>...} {<sup>4</sup>...} {<sup>5</sup>...}</code> 1 mic mediu mare niciunul DIMENSION 2 CSNAME 3 DIMENSION 4 DIMENSION 5 DIMENSION
<code>\assigndimen \<sup>1</sup>... {<sup>2</sup>...}</code> 1 CSNAME 2 DIMENSION
<code>\assigndimension {<sup>1</sup>...} \<sup>2</sup>... {<sup>3</sup>...} {<sup>4</sup>...} {<sup>5</sup>...}</code> 1 [-+]mic [-+]mediu [-+]mare niciunul DIMENSION 2 CSNAME 3 DIMENSION 4 DIMENSION 5 DIMENSION
<code>\assignifempty \<sup>1</sup>... {<sup>2</sup>...}</code> 1 CSNAME 2 BEFEHL
<code>\assigntranslation [...,<sup>1</sup>...,...] \to \<sup>2</sup>...</code> 1 SPRACHE = TEXT 2 CSNAME
<code>\assignvalue {<sup>1</sup>...} \<sup>2</sup>... {<sup>3</sup>...} {<sup>4</sup>...} {<sup>5</sup>...}</code> 1 mic mediu mare TEXT 2 CSNAME 3 BEFEHL 4 BEFEHL 5 BEFEHL
<code>\assignwidth {<sup>1</sup>...} \<sup>2</sup>... {<sup>3</sup>...} {<sup>4</sup>...}</code> 1 ajustat broad DIMENSION 2 CSNAME 3 TEXT 4 DIMENSION

$\backslash$ assumelongusagecs $\overset{1}{\dots} \{\overset{2}{\dots}\}$ 1 CSNAME 2 CONTENT
$\backslash$ astype $\{\dots\}$ * CONTENT
$\backslash$ ATTACHMENT $[\overset{1}{\dots}] [\dots, \overset{2}{\dots}, \dots]$ 1 NAME OPT OPT 2 inherits: \setupattachment instances: attachment
$\backslash$ attachment $[\overset{1}{\dots}] [\dots, \overset{2}{\dots}, \dots]$ 1 NAME OPT OPT 2 inherits: \setupattachment
$\backslash$ autocap $\{\dots\}$ * TEXT
$\backslash$ autodirhbox $\overset{1}{\dots} \{\overset{2}{\dots}\}$ 1 TEXT OPT 2 CONTENT
$\backslash$ autodirvbox $\overset{1}{\dots} \{\overset{2}{\dots}\}$ 1 TEXT OPT 2 CONTENT
$\backslash$ autodirvtop $\overset{1}{\dots} \{\overset{2}{\dots}\}$ 1 TEXT OPT 2 CONTENT
$\backslash$ autoinsertnextspace
$\backslash$ autointegral $\{\overset{1}{\dots}\} \{\overset{2}{\dots}\} \{\overset{3}{\dots}\}$ 1 TEXT 2 TEXT 3 TEXT
$\backslash$ automathematics $\{\dots\}$ * CONTENT
$\backslash$ autopagestaterealpage $\{\dots\}$ * NAME
$\backslash$ autopagestaterealpageorder $\{\dots\}$ * NAME
$\backslash$ autosetups $\{\dots, \dots\}$ * NAME
$\backslash$ autostarttext ... $\backslash$ autostoptext
$\backslash$ availablehsize
$\backslash$ averagecharwidth
$\backslash$ BeforePar $\{\dots\}$ * BEFEHL

\Big ... * CHARACTER
\Bigg ... * CHARACTER
\Biggl ... * CHARACTER
\Biggm ... * CHARACTER
\Biggr ... * CHARACTER
\Bigl ... * CHARACTER
\Bigm ... * CHARACTER
\Bigr ... * CHARACTER
\backgroundimage {...} {...} {...} {...} 1 NUMBER 2 DIMENSION 3 DIMENSION 4 BEFEHL
\backgroundimagefill {...} {...} {...} {...} 1 NUMBER 2 DIMENSION 3 DIMENSION 4 BEFEHL
\backgroundline [...] {...} 1 COLOR 2 CONTENT
\bar {...} * CHARACTER
\baraculoare [...,*...] * COLOR
\barainteractiune [... <sup>1</sup> ] [... <sup>2</sup> ...,...] 1 NAME OPT OPT 2 inherits: \seteazabarainteractiune
\BAR {...} * CONTENT instances: overbar underbar overstrike understrike overbars underbars overstrikes understrikes underrandom underrandoms underdash underdashes underdot underdots nobar hiddenbar
\hiddenbar {...} * CONTENT

$\backslash nobar \{...\}$ *    CONTENT
$\backslash overbar \{...\}$ *    CONTENT
$\backslash overbars \{...\}$ *    CONTENT
$\backslash overstrike \{...\}$ *    CONTENT
$\backslash overstrikes \{...\}$ *    CONTENT
$\backslash underbar \{...\}$ *    CONTENT
$\backslash underbars \{...\}$ *    CONTENT
$\backslash underdash \{...\}$ *    CONTENT
$\backslash underdashes \{...\}$ *    CONTENT
$\backslash underdot \{...\}$ *    CONTENT
$\backslash underdots \{...\}$ *    CONTENT
$\backslash underrandom \{...\}$ *    CONTENT
$\backslash underrandoms \{...\}$ *    CONTENT
$\backslash understrike \{...\}$ *    CONTENT
$\backslash understrikes \{...\}$ *    CONTENT

<pre> \basegrid [...,..*=...,...] *   nx           = NUMMER     ny           = NUMMER     dx           = NUMMER     dy           = NUMMER     factor       = NUMMER     scala        = NUMMER     xstep        = NUMMER     ystep        = NUMMER     offset       = DIMENSION     xoffset      = DIMENSION     yoffset      = DIMENSION     aliniere     = centru     unitate      = cm mm in pc pt bp     stil         = STYLE BEFEHL     culoare      = COLOR     culoarerigla = COLOR     grosimerigla = DIMENSION </pre>
<pre> \baselinebottom </pre>
<pre> \baselineleftbox {...} *   CONTENT </pre>
<pre> \baselinemiddlebox {...} *   CONTENT </pre>
<pre> \baselinerightbox {...} *   CONTENT </pre>
<pre> \bbordermatrix {...} *   CONTENT </pre>
<pre> \bbox {...} *   CONTENT </pre>
<pre> \beforesplitstring ... \at ... \to ... 1   TEXT 2   TEXT 3   CSNAME </pre>
<pre> \beforetestandsplitstring ... \at ... \to ... 1   TEXT 2   TEXT 3   CSNAME </pre>
<pre> \beginBLOCK [...,<sup>1</sup>...] [...,<sup>2</sup>...] ... \endBLOCK 1   + - NAME      OPT      OPT 2   KEY = VALUE </pre>
<pre> \beginhbox ... \endhbox </pre>
<pre> \beginofshapebox ... \endofshapebox </pre>
<pre> \beginvbox ... \endvbox </pre>
<pre> \beginvtop ... \endvtop </pre>
<pre> \begstrut ... \endstrut </pre>
<pre> \bigbodyfont </pre>

<code>\bigg ...</code> * CHARACTER
<code>\bigger</code>
<code>\biggl ...</code> * CHARACTER
<code>\biggm ...</code> * CHARACTER
<code>\biggr ...</code> * CHARACTER
<code>\bigl ...</code> * CHARACTER
<code>\bigm ...</code> * CHARACTER
<code>\bigr ...</code> * CHARACTER
<code>\bigskip</code>
<code>\bitmapimage [...,\stackrel{1}{...}] {\stackrel{2}{...}}</code> 1 culoare = rgb cmyk gri latime = DIMENSION inaltime = DIMENSION x = NUMMER y = NUMMER 2 NUMMER
<code>\blanc [...,*,...]</code> * preferinta <sup>OPT</sup> aceeasipagina max fortat enable dezactivat faraalb impachetat inapot overlay totdeauna weak strong implicit inainte intre dupa fixat flexibil niciunul mic mediu mare linie jumatatelinie quarterline formula alb inaltime adancime standard NUMMER*mic NUMMER*mediu NUMMER*mare NUMMER*linie NUMMER*jumatatelinie NUMMER*quarterline NUMMER*formula NUMMER*alb NUMMER*inaltime NUMMER*adancime category:NUMMER order:NUMMER penalty:NUMMER DIMENSION NAME
<code>\blap {...}</code> * CONTENT
<code>\bleed [...,\stackrel{1}{...}] {\stackrel{2}{...}}</code> 1 inherits: \setupbleeding 2 CONTENT
<code>\bleedheight</code>
<code>\bleedwidth</code>
<code>\blockligatures [...,*,...]</code> * TEXT
<code>\blocksynctexfile [...,*,...]</code> * FILE
<code>\blockuservariable {...}</code> * KEY

<code>\bodyfontenvironmentlist</code>
<code>\bodyfontsize</code>
<code>\boldface</code>
<code>\booleanmodevalue {...}</code> * NAME
<code>\bordermatrix {...}</code> * CONTENT
<code>\bottombox {...}</code> * CONTENT
<code>\bottomleftbox {...}</code> * CONTENT
<code>\bottomrightbox {...}</code> * CONTENT
<code>\boxcursor</code>
<code>\boxmarker {...} {...}</code> 1 NAME 2 NUMMER
<code>\boxofsize \... ..<sup>1</sup> ...<sup>2</sup> ...<sup>3</sup> {...}</code> 1 CSNAME 2 DIMENSION 3 CONTENT
<code>\boxreference [...,<sup>1</sup>...] \...<sup>2</sup> {...<sup>3</sup>}</code> 1 REFERENCE 2 CSNAME 3 CONTENT
<code>\bpar ... \epar</code>
<code>\bpos {...}</code> * NAME
<code>\breakhere</code>
<code>\breve {...}</code> * CHARACTER
<code>\bTABLE [...,<sup>*</sup>...,...] ... \eTABLE</code> * inherits: \setupTABLE
<code>\bTABLEbody [...,<sup>*</sup>...,...] ... \eTABLEbody</code> * inherits: \setupTABLE
<code>\bTABLEfoot [...,<sup>*</sup>...,...] ... \eTABLEfoot</code> * inherits: \setupTABLE



\TABLEhead [... <sup>*</sup> ...] ... \eTABLEhead * inherits: \setupTABLE
\TABLEnext [... <sup>*</sup> ...] ... \eTABLEnext * inherits: \setupTABLE
\TC [... <sup>*</sup> ...] ... \eTC * inherits: \BTD
\TD [... <sup>*</sup> ...] ... \eTD * nx = <sup>OPT</sup> NUMBER ny = NUMBER nc = NUMBER nr = NUMBER n = NUMBER m = NUMBER actiune = REFERENCE inherits: \setupTABLE
\TDs [... <sup>*</sup> ...] ... \eTDs * NAME
\TH [... <sup>*</sup> ...] ... \eTH * inherits: \BTD
\TN [... <sup>*</sup> ...] ... \eTN * inherits: \BTD
\TR [... <sup>*</sup> ...] ... \eTR * inherits: \PTsetupTABLE
\TRs [... <sup>*</sup> ...] ... \eTRs * NAME
\TX [... <sup>*</sup> ...] ... \eTX * inherits: \BTD
\TY [... <sup>*</sup> ...] ... \eTY * inherits: \PTsetupTABLE
\btxabbreviatedjournal {...} * NAME
\btxaddjournal [... <sup>1</sup> ] [... <sup>2</sup> ] 1 NAME 2 NAME
\btxalwayscitation [... <sup>1</sup> ...] [... <sup>2</sup> ] 1 referinta = REFERENCE <sup>OPT</sup> alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authorityyear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 REFERENCE
\btxalwayscitation [... <sup>1</sup> ] [... <sup>2</sup> ] 1 implicit category entry <sup>OPT</sup> short pagina num textnum an index tag keywords autor authoryears authornum authorityyear 2 REFERENCE

```

\btxalwayscitation [...1...] [...2...]
1  referinta    = REFERENCE
   alternativ    = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
                  authoryear
   inainte      = BEFEHL
   dupa         = BEFEHL
   stanga       = BEFEHL
   dreapta      = BEFEHL
   inherits: \setupbtx
2  KEY = VALUE

```

```

\btxauthorfield {...}
*  initials firstnames vons surnames juniors

```

```

\btxdetail {...}
*  address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language
   luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an
   yearfiled NAME

```

```

\btxdirect {...}
*  address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language
   luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an
   yearfiled NAME

```

```

\btxdoif {...} {...}
1  address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language
   luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an
   yearfiled NAME
2  TRUE

```

```

\btxdoifcombiinlistelse {...} {...} {...} {...}
1  NAME
2  NAME
3  TRUE
4  FALSE

```

```

\btxdoifelse {...} {...} {...}
1  address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language
   luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an
   yearfiled NAME
2  TRUE
3  FALSE

```

```

\btxdoifelsecombiinlist {...} {...} {...} {...}
1  NAME
2  NAME
3  TRUE
4  FALSE

```

```

\btxdoifelsesameasprevious {...} {...} {...}
1  address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language
   luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an
   yearfiled NAME
2  TRUE
3  FALSE

```

```

\btxdoifelsesameaspreviouschecked {...} {...} {...} {...}
1  totdeauna douafete
2  address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language
   luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an
   yearfiled NAME
3  TRUE
4  FALSE

```

```

\btxdoifelseuservariable {...} {...} {...}
1  KEY
2  TRUE
3  FALSE

```

<pre> \btxdoifnot {.^1.} {.^2.} 1  address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language    luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an    yearfiled NAME 2  TRUE </pre>
<pre> \btxdoifsameaspreviouscheckedelse {.^1.} {.^2.} {.^3.} {.^4.} 1  totdeauna douafete 2  address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language    luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an    yearfiled NAME 3  TRUE 4  FALSE </pre>
<pre> \btxdoifsameaspreviouselse {.^1.} {.^2.} {.^3.} 1  address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language    luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an    yearfiled NAME 2  TRUE 3  FALSE </pre>
<pre> \btxdoifuservariableelse {.^1.} {.^2.} {.^3.} 1  KEY 2  TRUE 3  FALSE </pre>
<pre> \btxexpandedjournal {.^*} *  NAME </pre>
<pre> \btxfield {.^*} *  address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language    luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an    yearfiled NAME </pre>
<pre> \btxfieldname {.^*} *  address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language    luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an    yearfiled NAME </pre>
<pre> \btxfieldtype {.^*} *  address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language    luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an    yearfiled NAME </pre>
<pre> \btxfirstofrange {.^*} *  volume pages </pre>
<pre> \btxflush {.^*} *  address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language    luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an    yearfiled NAME </pre>
<pre> \btxflushauthor [.^1.] {.^2.} 1  num normal normalsh<sup>OPT</sup>t inverted invertedshort 2  autor editor </pre>
<pre> \btxflushauthorinverted {.^*} *  autor editor </pre>
<pre> \btxflushauthorinvertedshort {.^*} *  autor editor </pre>
<pre> \btxflushauthorname {.^*} *  autor editor </pre>

\btxflushauthornormal {...} * autor editor
\btxflushauthornormalshort {...} * autor editor
\btxflushsuffix
\btxfoundname {...} * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME
\btxfoundtype {...} * address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME
\btxhiddencitation [...] * REFERENCE
\btxhybridcite [... <sup>1</sup> ... <sup>2</sup> ...] [...] 1 referinta = REFERENCE <sup>OPT</sup> alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 REFERENCE
\btxhybridcite [... <sup>1</sup> ...] [... <sup>2</sup> ...] 1 implicit category <sup>OPT</sup> entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear 2 REFERENCE
\btxhybridcite {...} * REFERENCE
\btxhybridcite [... <sup>1</sup> ... <sup>2</sup> ...] [... <sup>2</sup> ... <sup>1</sup> ...] 1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 KEY = VALUE
\btxlistcitation [... <sup>1</sup> ... <sup>2</sup> ...] [...] 1 referinta = REFERENCE <sup>OPT</sup> alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 REFERENCE
\btxlistcitation [... <sup>1</sup> ...] [... <sup>2</sup> ...] 1 implicit category <sup>OPT</sup> entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear 2 REFERENCE

\btplistcitation [...,<sup>1</sup>...,...] [...,<sup>2</sup>...,...]

```
1  referinta  = REFERENCE
   alternativ  = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
               authoryear
   inainte    = BEFEHL
   dupa       = BEFEHL
   stanga     = BEFEHL
   dreapta    = BEFEHL
   inherits: \setupbtx
2  KEY = VALUE
```

\btloadjournalist [...]

\* FILE

\btandoneorrange {...} {...} {...}

```
1  volume pages
2  TRUE
3  FALSE
```

\btxremapauthor [...]<sup>1</sup> [...]<sup>2</sup>

```
1  TEXT
2  TEXT
```

\btssavejournalist [...]

\* FILE

\btxsetup {...}

\* NAME

\btxsingularorplural {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup>

```
1  editor producer director
2  TRUE
3  FALSE
```

\btxsingularplural {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup>

```
1  editor producer director
2  TRUE
3  FALSE
```

\btxtextcitation [...,<sup>1</sup>...,...] [...]<sup>2</sup>

```
1  referinta  = REFERENCEOPT
   alternativ  = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
               authoryear
   inainte    = BEFEHL
   dupa       = BEFEHL
   stanga     = BEFEHL
   dreapta    = BEFEHL
   inherits: \setupbtx
2  REFERENCE
```

\btxtextcitation [...]<sup>1</sup> [...]<sup>2</sup>

```
1  implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2  REFERENCE
```

\btxtextcitation [...,<sup>1</sup>...,...] [...,<sup>2</sup>...,...]

```
1  referinta  = REFERENCE
   alternativ  = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
               authoryear
   inainte    = BEFEHL
   dupa       = BEFEHL
   stanga     = BEFEHL
   dreapta    = BEFEHL
   inherits: \setupbtx
2  KEY = VALUE
```

$\backslash\text{buildmathaccent}$ {...} {...} 1 CHARACTER 2 CHARACTER
$\backslash\text{buildtextaccent}$ {...} {...} 1 CHARACTER 2 CHARACTER
$\backslash\text{buildtextbottomcomma}$ {...} * CHARACTER
$\backslash\text{buildtextbottomdot}$ {...} * CHARACTER
$\backslash\text{buildtextcedilla}$ {...} * CHARACTER
$\backslash\text{buildtextgrave}$ {...} * CHARACTER
$\backslash\text{buildtextmacron}$ {...} * CHARACTER
$\backslash\text{buildtextognek}$ {...} * CHARACTER
$\backslash\text{butoaneinteractiune}$ [..., <sup>1</sup> ..., <sup>2</sup> ...] [..., <sup>2</sup> ,...] 1 inherits: $\backslash\text{seteazabarainteractiune}$ 2 pagina subpagina REFERENCE
$\backslash\text{buton}$ [..., <sup>1</sup> ..., <sup>2</sup> ...] {...} [...] 1 inherits: $\backslash\text{setupbutton}$ 2 TEXT 3 REFERENCE
$\backslash\text{butonmeniu}$ [..., <sup>1</sup> ..., <sup>2</sup> ...] {...} {...} 1 inherits: $\backslash\text{setupbutton}$ 2 TEXT 3 REFERENCE
$\backslash\text{butonmeniu}$ [... <sup>1</sup> ] [..., <sup>2</sup> ..., <sup>3</sup> ...] {...} {...} 1 NAME 2 inherits: $\backslash\text{seteazameniuinteractiune}$ 3 TEXT 4 REFERENCE
$\backslash\text{BUTTON}$ [..., <sup>1</sup> ..., <sup>2</sup> ...] {...} [...] 1 inherits: $\backslash\text{setupbutton}$ 2 TEXT 3 REFERENCE instances: button
$\backslash\text{Caps}$ {...} * TEXT
$\backslash\text{CONTEXT}$
$\backslash\text{ConTeXt}$
$\backslash\text{Context}$

<code>\ConvertConstantAfter \.<sup>1</sup>. {..<sup>2</sup>.} {..<sup>3</sup>.}</code> 1 CSNAME 2 TEXT 3 TEXT
<code>\ConvertToConstant \.<sup>1</sup>. {..<sup>2</sup>.} {..<sup>3</sup>.}</code> 1 CSNAME 2 TEXT 3 TEXT
<code>\CUVANT {..<sup>*</sup>.}</code> * TEXT
<code>\CUVINTE {..<sup>*</sup>.}</code> * TEXT
<code>\Cuvant {..<sup>*</sup>.}</code> * TEXT
<code>\Cuvinte {..<sup>*</sup>.}</code> * TEXT
<code>\caligrafic</code>
<code>\camel {..<sup>*</sup>.}</code> * TEXT
<code>\camp [...]<sup>1</sup> [...]<sup>2</sup></code> 1 NAME OPT 2 TEXT
<code>\catcodetablename</code>
<code>\cbox .<sup>1</sup>. {..<sup>2</sup>.}</code> 1 TEXT OPT 2 CONTENT
<code>\centraligned {..<sup>*</sup>.}</code> * CONTENT
<code>\centerbox .<sup>1</sup>. {..<sup>2</sup>.}</code> 1 TEXT OPT 2 CONTENT
<code>\centeredbox .<sup>1</sup>. {..<sup>2</sup>.}</code> 1 TEXT OPT 2 CONTENT
<code>\centeredlastline</code>
<code>\centerednextbox .<sup>1</sup>. {..<sup>2</sup>.}</code> 1 TEXT OPT 2 CONTENT
<code>\centerline {..<sup>*</sup>.}</code> * CONTENT
<code>\centru .<sup>*</sup>.</code> * CHARACTER

$\backslash\mathrm{cfrac}$ [ <sup>1</sup> ...] { <sup>2</sup> ...} { <sup>3</sup> ...} 1 l c r l <sup>P</sup> l <sup>F</sup> c l <sup>r</sup> c l c c c r l r c r r 2 CONTENT 3 CONTENT
$\backslash\mathrm{CHARACTERKERNING}$ [ <sup>1</sup> ...] { <sup>2</sup> ...} 1 NUMMER OPT 2 TEXT
$\backslash\mathrm{chardescription}$ {...} * NUMMER
$\backslash\mathrm{charwidthlanguage}$
$\backslash\mathrm{check}$ {...} * CHARACTER
$\backslash\mathrm{checkcharacteralign}$ {...} * CONTENT
$\backslash\mathrm{checkedblank}$ [...,*,...] * inherits: \blanc
$\backslash\mathrm{checkedchar}$ { <sup>1</sup> ...} { <sup>2</sup> ...} 1 NUMMER 2 CHARACTER
$\backslash\mathrm{checkedfiller}$ {...} * sym simbol rigla latime spatiu NAME BEFEHL
$\backslash\mathrm{checkedstrippedcsname}$ \*.. * CSNAME
$\backslash\mathrm{checkedstrippedcsname}$ *.. * TEXT
$\backslash\mathrm{checkinjector}$ [...] * NAME
$\backslash\mathrm{checknextindentation}$ [...] * da nu auto
$\backslash\mathrm{checknextinjector}$ [...] * NAME
$\backslash\mathrm{checkpage}$ [ <sup>1</sup> ...] [..., <sup>2</sup> ...,...] 1 NAME OPT 2 inherits: \setuppagechecker
$\backslash\mathrm{checkparameters}$ [...] * TEXT
$\backslash\mathrm{checkpreviousinjector}$ [...] * NAME
$\backslash\mathrm{checksoundtrack}$ {...} * NAME



<pre>\checktwopassdata {...} * NAME</pre>
<pre>\checkvariables [...]<sup>1</sup> [...,...<sup>2</sup>...,...]</pre> <pre>1 NAME 2 set = BEFEHL reset = BEFEHL KEY = VALUE</pre>
<pre>\chem {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup></pre> <pre>1 TEXT 2 TEXT 3 TEXT</pre>
<pre>\chemical [...]<sup>1</sup> [...,...<sup>2</sup>...,...]<sup>3</sup> [...,...]<sup>3</sup></pre> <pre>1 NAME OPT OPT 2 TEXT 3 TEXT</pre>
<pre>\chemicalbottext {...} * TEXT</pre>
<pre>\chemicalmidtext {...} * TEXT</pre>
<pre>\chemicalsymbol [...] * NAME</pre>
<pre>\chemicaltext {...} * TEXT</pre>
<pre>\chemicaltoptext {...} * TEXT</pre>
<pre>\chineseallnumerals {...} * NUMMER</pre>
<pre>\chineseapnumerals {...} * NUMMER</pre>
<pre>\chinesenumerals {...} * NUMMER</pre>
<pre>\citation [...,...<sup>1</sup>...,...]<sup>2</sup> [...]</pre> <pre>1 referinta = REFERENCE alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear inainte = BEFEHL dupa = BEFEHL stanga = BEFEHL dreapta = BEFEHL inherits: \setupbtx 2 REFERENCE</pre>
<pre>\citation [...]<sup>1</sup> [...]<sup>2</sup></pre> <pre>1 implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear 2 REFERENCE</pre>
<pre>\citation {...} * REFERENCE</pre>

`\citation [...,\sup{1}...,...]` `[...,\sup{2}...,...]`

```
1  referinta = REFERENCE
   alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
               authoryear
   inainte   = BEFEHL
   dupa      = BEFEHL
   stanga    = BEFEHL
   dreapta   = BEFEHL
   inherits: \setupbtx
2  KEY = VALUE
```

`\cite [...,\sup{1}...,...]` `[...,\sup{2}...]`

```
1  referinta opt = REFERENCE
   alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
               authoryear
   inainte   = BEFEHL
   dupa      = BEFEHL
   stanga    = BEFEHL
   dreapta   = BEFEHL
   inherits: \setupbtx
2  REFERENCE
```

`\cite [...,\sup{1}...]` `[...,\sup{2}...]`

```
1  implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2  REFERENCE
```

`\cite {...}`

\* REFERENCE

`\cite [...,\sup{1}...,...]` `[...,\sup{2}...,...]`

```
1  referinta = REFERENCE
   alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
               authoryear
   inainte   = BEFEHL
   dupa      = BEFEHL
   stanga    = BEFEHL
   dreapta   = BEFEHL
   inherits: \setupbtx
2  KEY = VALUE
```

`\clap {...}`

\* CONTENT

`\classfont [...,\sup{1}...] [...,\sup{2}...]`

```
1  NAME
2  FONT
```

`\cldcommand {...}`

\* BEFEHL

`\cldcontext {...}`

\* BEFEHL

`\cldloadfile {...}`

\* FILE

`\cldprocessfile {...}`

\* FILE

`\clip [...,\sup{1}...,...]` `{...,\sup{2}...}`

```
1  inherits: \seteazaclipping
2  CONTENT
```

`\clippedoverlayimage {...}`

\* FILE

`\cloneazacamp [...]1 [...]2 [...]3 [...]4,...]`

1 NAME  
2 NAME  
3 NAME  
4 NAME

`\collect {...}`

\* CONTENT

`\collectedtext [...]1,...1,...1] [...]2,...2,...2] {...}3 {...}4`

1 inherits: \setupcollect<sup>OFF</sup>  
2 stil = STYLE BEFEHL  
culoare = COLOR  
inherits: \seteazainconjurat  
3 TEXT  
4 CONTENT

`\collectexpanded {...}`

\* CONTENT

`\coloana [...]*,...]`

\* inherits: \columnbreak<sup>OPT</sup>

`\colorcomponents {...}`

\* COLOR

`\colored [...]1,...1,...1] {...}2`

1 inherits: \definesteculoare  
2 CONTENT

`\colored [...]1] {...}2`

1 COLOR  
2 CONTENT

`\coloronly [...]1] {...}2`

1 COLOR  
2 CONTENT

`\columnbreak [...]*,...]`

\* da nu preferinta local fortat primul ultim NUMMER NAME

`\columnsetspanwidth {...}`

\* NUMMER

`\combinepages [...]1 [...]2,...2,...2`

1 FILE  
2 alternativ = a b c orizontal vertical  
n = NUMMER  
nx = NUMMER  
ny = NUMMER  
start = NUMMER  
stop = NUMMER  
distanta = DIMENSION  
sus = BEFEHL  
jos = BEFEHL  
stanga = BEFEHL  
dreapta = BEFEHL  
inainte = BEFEHL  
dupa = BEFEHL  
intre = BEFEHL  
frame = on dezactivat  
fundal = primplan culoare NAME  
culoarefundal = COLOR

$$\backslash COMMENT \ [ \dots ] \ [ \dots, \dots \stackrel{2}{=} \dots, \dots ] \ { \dots }^3$$
$$\backslash comment \ [.^1..] \ [^..\,..\stackrel{2}{=}\,..\,..\] \ \{.^3..\}$$

\commalistelement

```
\commalistsentence [...1,...] [...2,...]
```

\commalistsize

\comparagrupculoare [...]\*]

\comparapaleta [...]

$$\backslash \text{comparedimension} \left\{ \begin{smallmatrix} 1 \\ \vdots \end{smallmatrix} \right\} \left\{ \begin{smallmatrix} 2 \\ \vdots \end{smallmatrix} \right\}$$

\comparedimensionens {<sup>1</sup>} {<sup>2</sup>}

\completeazanumarpagina

$$\backslash\mathrm{completebtxrendering} \quad [\dots] \quad [\dots, \dots \stackrel{2}{=} \dots, \dots]$$

`\completCOMBINEDLIST [...,*=...,...]`

$$\backslash completcontent [\dots\dots^* \dots\dots]$$

```
\completelist [...]1 [...,..2..,..]
```

```
\completelistofFLOATS [.....*=.....]
```

\completelistofchemicals [.....<sup>\*</sup>.....]

`\completelistoffigures [.....*.....]`

<code>\completelistofgraphics [...,..<sup>*</sup>...,...]</code> <code>* inherits: \seteazalista</code> <small>OPT</small>
<code>\completelistofintermezzi [...,..<sup>*</sup>...,...]</code> <code>* inherits: \seteazalista</code> <small>OPT</small>
<code>\completelistoftables [...,..<sup>*</sup>...,...]</code> <code>* inherits: \seteazalista</code> <small>OPT</small>
<code>\completelistofpublications [...<sup>1</sup>...] [...,..<sup>2</sup>...,...]</code> <code>1 NAME</code> <small>OPT</small> <small>OPT</small> <code>2 inherits: \setupbtxrendering</code>
<code>\completelistofsorts [...<sup>1</sup>...] [...,..<sup>2</sup>...,...]</code> <code>1 SINGULAR</code> <small>OPT</small> <code>2 inherits: \seteazasortare</code>
<code>\completelistofSORTS [...,..<sup>*</sup>...,...]</code> <code>* inherits: \seteazasortare</code> <small>OPT</small> <code>instances: logos</code>
<code>\completelistoflogos [...,..<sup>*</sup>...,...]</code> <code>* inherits: \seteazasortare</code> <small>OPT</small>
<code>\completelistofsynonyms [...<sup>1</sup>...] [...,..<sup>2</sup>...,...]</code> <code>1 SINGULAR</code> <small>OPT</small> <code>2 inherits: \seteazasinonime</code>
<code>\completelistofSYNONYMS [...,..<sup>*</sup>...,...]</code> <code>* inherits: \seteazasinonime</code> <small>OPT</small> <code>instances: abbreviations</code>
<code>\completelistofabbreviations [...,..<sup>*</sup>...,...]</code> <code>* inherits: \seteazasinonime</code> <small>OPT</small>
<code>\completeregister [...<sup>1</sup>...] [...,..<sup>2</sup>...,...]</code> <code>1 NAME</code> <small>OPT</small> <code>2 inherits: \seteazaregistru</code>
<code>\completREGISTER [...,..<sup>*</sup>...,...]</code> <code>* inherits: \seteazaregistru</code> <small>OPT</small> <code>instances: index</code>
<code>\completindex [...,..<sup>*</sup>...,...]</code> <code>* inherits: \seteazaregistru</code> <small>OPT</small>
<code>\complexorsimple \*..</code> <code>* CSNAME</code>
<code>\complexorsimpleempty \*..</code> <code>* CSNAME</code>
<code>\complexorsimpleempty {...}</code> <code>* TEXT CSNAME</code>
<code>\complexorsimple {...}</code> <code>* TEXT CSNAME</code>

\componenta [...] * FILE
\componenta ... * FILE
\composedcollector {...} * NAME
\composedlayer {...} * NAME
\compresult
\constantdimen \... * CSNAME
\constantdimenargument \... * CSNAME
\constantemptyargument \... * CSNAME
\constantnumber \... * CSNAME
\constantnumberargument \... * CSNAME
\contentreference [..., <sup>1</sup> ...] [..., <sup>2</sup> <sub>OPT</sub> ...,...] {... <sup>3</sup> } 1 REFERENCE 2 inherits: \seteazainconjurat 3 CONTENT
\continuednumber {...} * NUMMER
\continueifinputfile {...} * FILE
\convertargument ... <sup>1</sup> \to ... <sup>2</sup> 1 TEXT 2 CSNAME
\convertcommand \... <sup>1</sup> \to ... <sup>2</sup> 1 CSNAME 2 CSNAME
\convertedcounter [...] <sup>1</sup> [..., <sup>2</sup> <sub>OPT</sub> ...,...] 1 NAME 2 inherits: \setupcounter
\converteddimen {...} <sup>1</sup> {...} <sup>2</sup> 1 DIMENSION 2 ex em pt in cm mm sp bp pc dd cc nc

$\backslash$ convertedsubcounter [...] [...] [...] [...] 1 NAME OPT OPT 2 NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot 3 inherits: \setupcounter
$\backslash$ convertestenumar {...} {...} 1 gol implicit niciunul luna month:mnem caracter Caracater caractere Caractere a A Numere cuvant words Cuvant Cuvinte n N numereromane Numereromane i I r R KR RK grec Grec g G abjadnumerals abjadnodotnumerals abjadnaivenumerals thainumerals devanagarinumerals gurmurkhinumerals gujaratinnumerals tibetannumerals greeknumerals Greeknumerals arabicnumerals persiannumerals arabicexnumerals arabicdecimals persiandecimals koreannumerals koreanparentnumerals koreancircclenumerals kr kr-p kr-c chinesenumerals chinesecapnumerals chineseallnumerals cn cn-c cn-a sloveniannumerals slovenianNumerals spanishnumerals spanishNumerals mathgreek set_0 set_1 set_2 set_3 continued NAME 2 NUMMER
$\backslash$ convertmonth {...} * NUMMER
$\backslash$ convertvalue ... \to ... 1 NAME 2 CSNAME
$\backslash$ convertvboxtohbox
$\backslash$ copiazacamp [...] [...] 1 NAME 2 NAME
$\backslash$ copyboxfromcache {...} {...} ... 1 NAME 2 NUMMER TEXT 3 CSNAME NUMMER
$\backslash$ copyLABELtext [...] [...] 1 SPRACHE OPT 2 KEY = KEY instances: head label mathlabel taglabel unit operator prefix suffix btxlabel
$\backslash$ copybtxlabeltext [...] [...] 1 SPRACHE OPT 2 KEY = KEY
$\backslash$ copyheadtext [...] [...] 1 SPRACHE OPT 2 KEY = KEY
$\backslash$ copylabeltext [...] [...] 1 SPRACHE OPT 2 KEY = KEY
$\backslash$ copymathlabeltext [...] [...] 1 SPRACHE OPT 2 KEY = KEY
$\backslash$ copyoperatortext [...] [...] 1 SPRACHE OPT 2 KEY = KEY
$\backslash$ copyprefixtext [...] [...] 1 SPRACHE OPT 2 KEY = KEY

$\backslash\text{copysuffixtext}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...] 1 SPRACHE OPT 2 KEY = KEY
$\backslash\text{copytaglabeltext}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...] 1 SPRACHE OPT 2 KEY = KEY
$\backslash\text{copyunittext}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...] 1 SPRACHE OPT 2 KEY = KEY
$\backslash\text{copypages}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...] <sup>3</sup> ...] 1 FILE OPT OPT 2 marcaje = on dezactivat offset = DIMENSION n = NUMMER 3 inherits: \setupexternalfigure
$\backslash\text{copyparameters}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...] [ <sup>3</sup> ,...] 1 TEXT 2 TEXT 3 KEY
$\backslash\text{copyposition}$ { <sup>1</sup> .} { <sup>2</sup> .} 1 NAME 2 NAME
$\backslash\text{copysetups}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...] 1 NAME 2 NAME
$\backslash\text{corecteazaspatalb}$ {.*} * CONTENT
$\backslash\text{countersubs}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...] 1 NAME OPT 2 NUMMER
$\backslash\text{counttoken}$ <sup>1</sup> ... \in <sup>2</sup> ... \to \sup{3}... 1 TEXT 2 TEXT 3 CSNAME
$\backslash\text{counttokens}$ <sup>1</sup> ... \to \sup{2}... 1 TEXT 2 CSNAME
$\backslash\text{cramped}$ {.*} * CONTENT
$\backslash\text{crampedclap}$ {.*} * CONTENT
$\backslash\text{crampedllap}$ {.*} * CONTENT
$\backslash\text{crapedrlap}$ {.*} * CONTENT



$\backslash\text{ctop}$ <sup>1</sup> ... { <sup>2</sup> ...} 1 TEXT <sup>OPT</sup> 2 CONTENT
$\backslash\text{ctxcommand}$ { <sup>*</sup> ...} * BEFEHL
$\backslash\text{ctxdirectcommand}$ { <sup>*</sup> ...} * BEFEHL
$\backslash\text{ctxdirectlua}$ { <sup>*</sup> ...} * BEFEHL
$\backslash\text{ctxfunction}$ { <sup>*</sup> ...} * NAME
$\backslash\text{CTXFUNCTIONDEFINITION}$
$\backslash\text{CTXFUNCTION}$
$\backslash\text{ctxlatecommand}$ { <sup>*</sup> ...} * BEFEHL
$\backslash\text{ctxlatelua}$ { <sup>*</sup> ...} * BEFEHL
$\backslash\text{ctxloadluafile}$ { <sup>*</sup> ...} * FILE
$\backslash\text{ctxlua}$ { <sup>*</sup> ...} * BEFEHL
$\backslash\text{ctxluabuffer}$ [ <sup>*</sup> ...] <sup>OPT</sup> * BUFFER
$\backslash\text{ctxluacode}$ { <sup>*</sup> ...} * BEFEHL
$\backslash\text{ctxreport}$ { <sup>*</sup> ...} * BEFEHL
$\backslash\text{ctxsprint}$ { <sup>*</sup> ...} * BEFEHL
$\backslash\text{culoare}$ [ <sup>1</sup> ...] { <sup>2</sup> ...} 1 COLOR 2 CONTENT
$\backslash\text{culoaregri}$ [ <sup>1</sup> ...] { <sup>2</sup> ...} 1 COLOR 2 CONTENT
$\backslash\text{currentassignmentlistkey}$
$\backslash\text{currentassignmentlistvalue}$

\currentbtxuservariable {...} * KEY
\currentcommalistitem
\currentcomponent
\currentenvironment
\currentfeaturetest
\currentinterface
\currentETICHETA [..., <sup>1</sup> ...] {... <sup>2</sup> } 1 REFERENCE OPT OPT 2 TEXT
\currentlanguage
\currentlistentrydestinationattribute
\currentlistentrylimitedtext {...} * TEXT
\currentlistentrynumber
\currentlistentrypagenumber
\currentlistentryreferenceattribute {...} * numar text numarpagina tot
\currentlistentrytitle
\currentlistentrytitlrendered
\currentlistsymbol
\currentmainlanguage
\currentmessagetext
\currentmoduleparameter {...} * KEY
\currentoutputstream
\currentproduct
\currentproject
\currentregime
\currentregisterpageuserdata {...} * KEY

<code>\currentresponses</code>
<code>\currenttime [...*,...]</code> <code>* h m TEXT</code> <small>OPT</small>
<code>\currentvalue</code>
<code>\currentxtablecolumn</code>
<code>\currentxtablerow</code>
<code>\cuvant {...}</code> <code>* TEXT</code>
<code>\cuvantdreapta [...<sup>1</sup>] {...<sup>2</sup>}</code> <code>1 dreapta DIMENSION</code> <small>OPT</small> <code>2 CONTENT</code>
<code>\d {...}</code> <code>* CHARACTER</code>
<code>\data [...<sup>1</sup>,...<sup>2</sup>,...]</code> <code>1 d = NUMMER</code> <small>OPT</small> <code>m = NUMMER</code> <code>y = NUMMER</code> <code>2 inherits: \datacurenta</code>
<code>\datacurenta [...*,...]</code> <code>* an luna zi zisaptamana y yy Y m mm M d dd D w W spatiu \ month:mnem m:mnem d:ord day:ord dd:ord D:ord TEXT</code> <code>referinta day:+ day:++ d:+ d:++ dd:+ dd:++ D:+ D:++ month:jalali m:jalali jalali:to jalali:from</code>
<code>\datasetvariable {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>}</code> <code>1 NAME</code> <code>2 NAME NUMMER</code> <code>3 KEY realpage</code>
<code>\dayoftheweek {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>}</code> <code>1 NUMMER</code> <code>2 NUMMER</code> <code>3 NUMMER</code>
<code>\dayspermonth {...<sup>1</sup>} {...<sup>2</sup>}</code> <code>1 NUMMER</code> <code>2 NUMMER</code>
<code>\dddots {...}</code> <code>* CHARACTER</code>
<code>\ddots {...}</code> <code>* CHARACTER</code>
<code>\decrement \*...</code> <code>* CSNAME</code>
<code>\decrementcounter [...<sup>1</sup>] [...<sup>2</sup>]</code> <code>1 NAME</code> <small>OPT</small> <code>2 NUMMER</code>

\decrementedcounter [...] * NAME
\decrementpagenumber
\decrementsubpagenumber
\decrementvalue {...} * NAME
\decrement (...;...) * CSNAME NUMBER
\defaultinterface
\defaultobjectpage
\defaultobjectreference
\defcatcodecommand \ <sup>1</sup> ... \ <sup>2</sup> ... { <sup>3</sup> ...} 1 CSNAME 2 CHARACTER NUMBER 3 BEFEHL
\defconvertedargument \ <sup>1</sup> ... { <sup>2</sup> ...} 1 CSNAME 2 TEXT
\defconvertedcommand \ <sup>1</sup> ... \ <sup>2</sup> ... 1 CSNAME 2 CSNAME
\defconvertedvalue \ <sup>1</sup> ... { <sup>2</sup> ...} 1 CSNAME 2 NAME
\defineactivecharacter \ <sup>1</sup> ... { <sup>2</sup> ...} 1 CHARACTER 2 BEFEHL
\definealternativestyle [... <sup>1</sup> ,...] [... <sup>2</sup> ] [... <sup>3</sup> ] 1 NAME 2 BEFEHL 3 BEFEHL
\defineanchor [... <sup>1</sup> ] [... <sup>2</sup> ] [... <sup>3</sup> ,... <sup>3</sup> ,...] [... <sup>4</sup> ,... <sup>4</sup> ,...] 1 NAME 2 NAME 3 inherits: \setupplayer 4 inherits: \setupplayerinherits: \seteazainconjurat
\defineattachment [... <sup>1</sup> ] [... <sup>2</sup> ] [... <sup>3</sup> ,... <sup>3</sup> ,...] 1 NAME 2 NAME 3 inherits: \setupattachment
\defineattribute [... <sup>1</sup> ] [... <sup>2</sup> ,...] 1 NAME 2 local global public private pickup

```
\definebackground [...]1 [...]2 [...,...3...,...]3
1 NAME OPT OPT
2 NAME
3 inherits: \seteazafundal
```

```
\definebar [...]1 [...]2 [...,...3...,...]3
1 NAME OPT OPT
2 NAME
3 inherits: \setupbar
```

```
\definebodyfontswitch [...]1 [...,2...]2
1 NAME
2 inherits: \seteazafonttext
```

```
\definebreakpoint [...]1 [...]2 [...,...3...,...]3
1 NAME OPT
2 CHARACTER
3 type = 1 2 3 4 5
nstanga = NUMMER
ndreapta = NUMMER
stanga = BEFEHL
mijloc = BEFEHL
dreapta = BEFEHL
range = da nu
language = SPRACHE
```

```
\definebreakpoints [...]*
* NAME
```

```
\definebtx [...]1 [...]2 [...,...3...,...]3
1 NAME OPT OPT
2 NAME
3 inherits: \setupbtx
```

```
\definebtxdataset [...]1 [...]2 [...,...3...,...]3
1 NAME OPT OPT
2 NAME
3 inherits: \setupbtxdataset
```

```
\definebtxregister [...]1 [...]2 [...,...3...,...]3
1 NAME OPT OPT
2 NAME
3 inherits: \setupbtxregister
```

```
\definebtxrendering [...]1 [...]2 [...,...3...,...]3
1 NAME OPT OPT
2 NAME
3 inherits: \setupbtxrendering
```

```
\definebutton [...]1 [...]2 [...,...3...,...]3
1 NAME OPT OPT
2 NAME
3 inherits: \setupbutton
```

```
\definecapitals [...]1 [...]2 [...,...3...,...]3
1 NAME OPT OPT
2 NAME
3 inherits: \seteazamajuscule
```

```
\definecharacterkerning [...]1 [...]2 [...,...3...,...]3
1 NAME OPT OPT
2 NAME
3 inherits: \setupcharacterkerning
```

<code>\definecharacterspacing [...]</code> <code>* NAME</code>
<code>\definechemical [...] {...}</code> <code>1 NAME</code> <code>2 CONTENT</code>
<code>\definechemicals [...] [...]<sup>2</sup> [...,...<sup>3</sup>...,...]</code> <code>1 NAME</code> <code>2 NAME</code> <code>3 inherits: \setupchemical</code>
<code>\definechemicalsymbol [...] [...]</code> <code>1 NAME</code> <code>2 TEXT</code>
<code>\definecollector [...] [...]<sup>2</sup> [...,...<sup>3</sup>...,...]</code> <code>1 NAME</code> <code>2 NAME</code> <code>3 inherits: \setupcollector</code>
<code>\definecolumnbreak [...]<sup>1</sup> [...]<sup>2</sup>,...]</code> <code>1 NAME</code> <code>2 da nu preferinta local fortat primul ultim NUMMER</code>
<code>\definecolumnset [...] [...]<sup>2</sup> [...,...<sup>3</sup>...,...]</code> <code>1 NAME</code> <code>2 NAME</code> <code>3 inherits: \setupcolumnset</code>
<code>\definecolumnsetarea [...] [...]<sup>2</sup> [...,...<sup>3</sup>...,...]</code> <code>1 NAME</code> <code>2 NAME</code> <code>3 inherits: \setupcolumnsetarea</code>
<code>\definecolumnsetspan [...] [...]<sup>2</sup> [...,...<sup>3</sup>...,...]</code> <code>1 NAME</code> <code>2 NAME</code> <code>3 inherits: \setupcolumnsetspan</code>
<code>\definecombination [...] [...]<sup>2</sup> [...,...<sup>3</sup>...,...]</code> <code>1 NAME</code> <code>2 NAME</code> <code>3 inherits: \setupcombination</code>
<code>\definecomment [...] [...]<sup>2</sup> [...,...<sup>3</sup>...,...]</code> <code>1 NAME</code> <code>2 NAME</code> <code>3 inherits: \seteazacomentariu</code>
<code>\definecomplexorsimple \...</code> <code>* CSNAME</code>
<code>\definecomplexorsimpleempty \...</code> <code>* CSNAME</code>
<code>\definecomplexorsimpleempty {...}</code> <code>* TEXT CSNAME</code>
<code>\definecomplexorsimple {...}</code> <code>* TEXT CSNAME</code>

```
\defineconversionset [...] [...] [...]
1  NAME SECTIONBLOCK:NAME
2  NAME PROCESSOR->NAME
3  NAME PROCESSOR->NAME
```

```
\definecounter [...] [...] [...]
1  NAME
2  NAME
3  inherits: \setupcounter
```

```
\definedataset [...] [...] [...]
1  NAME
2  NAME
3  inherits: \setupdataset
```

```
\definedelimitedtext [...] [...] [...]
1  NAME
2  NAME
3  inherits: \setupdelimitedtext
```

```
\definedfont [...]
*  FONT
```

```
\defineeffect [...] [...] [...]
1  NAME
2  NAME
3  inherits: \setupeffect
```

```
\defineexpandable [...] \^ [...] { }
1  NUMMER
2  CSNAME
3  CONTENT
```

```
\defineexternalfigure [...] [...] [...]
1  NAME
2  NAME
3  inherits: \setupexternalfigure
```

```
\definefacingfloat [...] [...] [...]
1  NAME
2  NAME
3  inherits: \setupfacingfloat
```

```
\definefallbackfamily [...] [...] [...] [...]
1  NAME
2  rm ss tt mm hw cg roman serif regular sansserif sans suport teletype type mono scrismmanual caligrafic math
matematica
3  FONT
4  rscale      = NUMMER
designsize    = implicit auto
goodies      = FILE
range        = NUMMER NAME
offset       = NUMMER NAME
check        = da nu
fortat       = da nu
features     = NAME
tf           = TEXT
bf           = TEXT
it           = TEXT
sl           = TEXT
bi           = TEXT
bs           = TEXT
sc           = TEXT
```

`\definefallbackfamily [...]1 [...]2 [...]3 [...]4,...]`

1 NAME OPT  
2 rm ss tt mm hw cg roman serif regular sansserif sans suport teletype type mono scrismathematica caligrafic math  
3 FONT  
4 NAME

`\definefieldbody [...]1 [...]2 [...]3,...]`

1 NAME OPT  
2 NAME OPT  
3 inherits: \setupfieldbody

`\definefieldbodyset [...]1 [...]2,...]`

1 NAME  
2 NAME

`\definefieldcategory [...]1 [...]2 [...]3,...]`

1 NAME OPT  
2 NAME OPT  
3 inherits: \setupfieldcategory

`\definefileconstant {...}1 {...}2`

1 NAME  
2 NAME

`\definefilefallback [...]1 [...]2,...]`

1 NAME  
2 FILE

`\definefilesynonym [...]1 [...]2`

1 NAME  
2 FILE

`\definefiller [...]1 [...]2 [...]3,...]`

1 NAME OPT  
2 NAME OPT  
3 inherits: \setupfiller

`\definefirstline [...]1 [...]2 [...]3,...]`

1 NAME OPT  
2 NAME OPT  
3 inherits: \setupfirstline

`\definefittingpage [...]1 [...]2 [...]3,...]`

1 NAME OPT  
2 NAME OPT  
3 inherits: \setupfittingpage

`\definefontalternative [...]*`

\* NAME

`\definefontfallback [...]1 [...]2 [...]3,...]4 [...]5,...]`

1 NAME OPT  
2 FONT NAME  
3 NAME NUMMER  
4 rscale = NUMMER  
fortat = da nu  
check = da nu  
offset = NUMMER NAME  
target = NUMMER NAME  
features = NAME  
factor = NUMMER  
metoda = lowercase uppercase



```

\definefontfamily [...] [...] [...] [...] [...]
1  NAME
2  rm ss tt mm hw cg roman serif regular sansserif sans suport teletype type mono scrismmanual caligrafic math
   matematica
3  FONT
4  rscale      =  NUMMER
   designsize  =  implicit auto
   goodies     =  FILE
   features    =  NAME
   tf          =  TEXT
   bf          =  TEXT
   it          =  TEXT
   sl          =  TEXT
   bi          =  TEXT
   bs          =  TEXT
   sc          =  TEXT

```

```

\definefontfamilypreset [...] [...]
1  NAME
2  inherits: \definefontfamily

```

```

\definefontfamilypreset [...] [...]
1  NAME
2  NAME

```

```

\definefontfamily [...] [...] [...] [...] [...]
1  NAME
2  rm ss tt mm hw cg roman serif regular sansserif sans suport teletype type mono scrismmanual caligrafic math
   matematica
3  FONT
4  NAME

```

**\definefontfeature** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...<sup>3</sup>...,...]

```
1  NAME                                OPT
2  NAME
3  language      = NAME
   script        = NAME auto
   mode          = node base auto niciunul
   liga          = da nu
   kern          = da nu
   extrakerns    = da nu
   tlig          = da nu
   trep          = da nu
   missing       = da nu
   dummies       = da nu
   analyze       = da nu
   unicoding     = da nu
   expansiune    = NAME
   protrusion    = NAME
   nostackmath   = da nu
   realdimensions = da nu
   itlc          = da nu
   textitalics   = da nu
   mathitalics   = da nu
   slant         = NUMMER
   extend        = NUMMER
   dimensions    = NUMMER
   boundingbox    = da nu fundal incadrat gol COLOR
   compose       = da nu
   char-ligatures = da nu
   compat-ligatures = da nu
   goodies       = FILE
   extrafeatures = da nu
   featureset    = NAME
   colorscheme   = NAME
   postprocessor = NAME
   mathdimensions = NAME
   keepligatures = da nu auto
   devanagari    = da nu
   features      = da nu
   tcom          = da nu
   anum          = da nu
   mathsize      = da nu
   decomposehangul = da nu
   mathalternatives = da nu
   mathgaps      = da nu
   checkmarks    = da nu
   NAME          = da nu
   mathnolimitsmode = NUMMER
   blockligatures = da nu
```

**\definefontfile** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...<sup>3</sup>...,...]

```
1  NAME                                OPT
2  FILE
3  features      = NAME
   fallbacks    = NAME
   goodies      = NAME
   designsize    = auto implicit
```

**\definefontsize** [...]

```
*  NAME
```

**\definefontsolution** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...<sup>3</sup>...,...]

```
1  NAME                                OPT      OPT
2  NAME
3  inherits: \setupfontsolution
```

**\defineformula** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...<sup>3</sup>...,...]

```
1  NAME                                OPT      OPT
2  NAME
3  inherits: \setupformula
```

**\defineformulaalternative** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...]

```
1  NAME
2  CSNAME
3  CSNAME
```

```
\defineformulaframed [...] [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupformulaframed
```

```
\defineframedcontent [...] [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupframedcontent
```

```
\defineframedtable [...] [...]
1 NAME OPT
2 NAME
```

```
\definefrozenfont [...] [...]
1 NAME
2 FONT
```

```
\defineglobalcolor [...] [...] [...]
1 NAME
2 inherits: \definesteculoare
```

```
\defineglobalcolor [...] [...]
1 NAME
2 COLOR
```

```
\definegraphictypesynonym [...] [...]
1 NAME
2 NAME
```

```
\definegridsnapping [...] [...]
1 NAME
2 local global noheight nodepth box max min niciunul linie jumatatelinie primul ultim inaltime minima maxheight
mindepth maxdepth sus subsol strut NUMMER minheight:NUMMER maxheight:NUMMER mindepth:NUMMER maxdepth:NUMMER
box:NUMMER top:NUMMER bottom:NUMMER offset:NUMMER
```

```
\defineheadalternative [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupheadalternative
```

```
\definehelp [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setuphelp
```

```
\definehigh [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setuphigh
```

```
\definehighlight [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setuphighlight
```

```
\definehspace [...] [...] [...]
1 NAME OPT
2 NAME
3 DIMENSION
```

`\definehyphenationfeatures [...]1 [...,...2...,...]`

```
1 NAME
2 characters = TEXT
  hyphens   = da tot TEXT
  joiners    = da tot TEXT
  rightwords = NUMMER
  hyphenmin  = NUMMER
  lefthyphenmin = NUMMER
  righthyphenmin = NUMMER
  lefthyphenchar = NUMMER
  righthyphenchar = NUMMER
  alternativ  = original tex hyphenate expanded traditional niciunul
  borduradreapta = tex
  rightchars = cuvant NUMMER
```

`\defineindentedtext [...]1 [...]2 [...,...3...,...]`

```
1 NAME
2 NAME
3 inherits: \setupindentedtext
```

`\defineindenting [...]1 [...,...2...,...]`

```
1 NAME
2 [-+]mic [-+]mediu [-+]mare niciunul nu nu primul urmatorul da totdeauna niciodata impar par normal reset toggle
  DIMENSION
```

`\defineinitial [...]1 [...]2 [...,...3...,...]`

```
1 NAME
2 NAME
3 inherits: \setupinitial
```

`\defineinsertion [...]1 [...]2 [...,...3...,...]`

```
1 NAME
2 NAME
3 inherits: \setupinsertion
```

`\defineinteraction [...]1 [...]2 [...,...3...,...]`

```
1 NAME
2 NAME
3 inherits: \seteazainteractiunea
```

`\defineinteractionbar [...]1 [...]2 [...,...3...,...]`

```
1 NAME
2 NAME
3 inherits: \seteazabarainteractiune
```

`\defineinterfaceconstant {...}1 {...}2`

```
1 NAME
2 NAME
```

`\defineinterfaceelement {...}1 {...}2`

```
1 NAME
2 NAME
```

`\defineinterfacevariable {...}1 {...}2`

```
1 NAME
2 NAME
```

`\defineinterlinespace [...]1 [...]2 [...,...3...,...]`

```
1 NAME
2 NAME
3 inherits: \seteazaspatiuinterliniar
```

`\defineintermediatecolor [...]1 [...,...2...,...]3 [...,...3...,...]`

```
1 NAME
2 COLOR NUMMER
3 a = NUMMER
  t = NUMMER
```

<pre> \defineitemgroup [...] [...] [...] [...] 1  NAME                      OPT      OPT 2  NAME 3  inherits: \setupitemgroup </pre>
<pre> \defineitems [...] [...] [...] [...] 1  NAME                      OPT      OPT 2  NAME 3  inherits: \seteazaelemente </pre>
<pre> \definelabelclass [...] [...] 1  NAME                      OPT 2  NUMMER </pre>
<pre> \definelayer [...] [...] [...] 1  NAME                      OPT      OPT 2  NAME 3  inherits: \setuplayer </pre>
<pre> \definelayerpreset [...] [...] 1  NAME 2  inherits: \setuplayer </pre>
<pre> \definelayerpreset [...] [...] 1  NAME 2  NAME </pre>
<pre> \definelayout [...] [...] [...] 1  NAME                      OPT      OPT 2  NAME 3  inherits: \seteazaaspect </pre>
<pre> \definelinefiller [...] [...] [...] 1  NAME                      OPT      OPT 2  NAME 3  inherits: \setuplinefiller </pre>
<pre> \definelinenote [...] [...] [...] 1  NAME                      OPT      OPT 2  NAME 3  inherits: \setuplinenote </pre>
<pre> \definelinenumbering [...] [...] [...] 1  NAME                      OPT      OPT 2  NAME 3  inherits: \seteazanumerotarelinii </pre>
<pre> \definelines [...] [...] [...] 1  NAME                      OPT      OPT 2  NAME 3  inherits: \seteazalinii </pre>
<pre> \definelistalternative [...] [...] [...] 1  NAME                      OPT      OPT 2  NAME 3  inherits: \setuplistalternative </pre>
<pre> \definelistextra [...] [...] [...] 1  NAME                      OPT      OPT 2  NAME 3  inherits: \setuplistextra </pre>

**\definelow** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuplow

**\definelowhigh** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuplowhigh

**\definelowmidhigh** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuplowmidhigh

**\defineMPinstance** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupMPinstance

**\definemarginblock** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupmarginblock

**\definemargindata** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupmargindata

**\definemarker** [...]

\* NAME

**\definemathaccent** <sup>1</sup>... <sup>2</sup>...

1 NAME  
2 CHARACTER

**\definemathalignment** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupmathalignment

**\definemathcases** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupmathcases

**\definemathcommand** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...] {<sup>4</sup>...}

1 NAME OPT OPT OPT  
2 ord op bin rel open close punct alpha intern nothing limop nolog box  
3 unu doi  
4 BEFEHL \...##1 \...##1##2

**\definemathdouble** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...] [<sup>4</sup>...]

1 ambele vfenced NAME  
2 NAME  
3 NUMMER  
4 NUMMER

**\definemathdoubleextensible** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...] [<sup>4</sup>...]

1 ambele vfenced OPT  
2 NAME  
3 NUMMER  
4 NUMMER

```
\definematheconomics [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmatheconomics
```

```
\definemathextensible [...] [...] [...]
1 reverse matematica text chemistry
2 NAME
3 NUMMER
```

```
\definemathfence [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathfence
```

```
\definemathfraction [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathfraction
```

```
\definemathframed [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathframed
```

```
\definemathmatrix [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathmatrix
```

```
\definemathornament [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathornament
```

```
\definemathover [...] [...] [...]
1 sus vfenced NAME
2 NAME
3 NUMMER
```

```
\definemathoverextensible [...] [...] [...]
1 sus vfenced OPT
2 NAME
3 NUMMER
```

```
\definemathovertexttextensible [...] [...] [...]
1 bothtext OPT
2 NAME
3 NUMMER
```

```
\definemathradical [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathradical
```

```
\definemathstackers [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathstackers
```

```
\definemathstyle [...] [...] [...]
1 NAME
2 display text script scriptscript cramped uncramped normal impachetat mic mare
```

`\definemathtriplet [1...] [2...] [3...]`

1 NAME OPT OPT  
2 NAME  
3 TEXT

`\definemathunder [1...] [2...] [3...]`

1 subsol vfenced NAME  
2 NAME  
3 NUMMER

`\definemathunderextensible [1...] [2...] [3...]`

1 subsol vfenced OPT  
2 NAME  
3 NUMMER

`\definemathundertextextensible [1...] [2...] [3...]`

1 bothtext OPT  
2 NAME  
3 NUMMER

`\definemathunstacked [1...] [2...] [3...]`

1 larg OPT  
2 NAME  
3 NUMMER

`\definemeasure [1...] [2...]`

1 NAME  
2 DIMENSION

`\definemessageconstant {.*}`

\* NAME

`\definemixedcolumns [1...] [2...] [...,3...,...]`

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupmixedcolumns

`\definemode [...,1...] [2...]`

1 NAME OPT  
2 da nu mentine

`\definemultitonecolor [1...] [...,2...,...][...,3...,...][...,4...,...]`

1 NAME OPT  
2 COLOR = NUMMER  
3 inherits: \definesteculoare  
4 inherits: \definespotcolor

`\definenamecolor [1...] [...,2...,...]`

1 NAME  
2 inherits: \definesteculoare

`\definenamecolor [1...] [2...]`

1 NAME  
2 COLOR

`\definenamespace [1...] [...,2...,...]`

1 NAME  
2 nume = TEXT  
parent = TEXT  
stil = da nu  
comanda = da nu lista  
setup = da nu lista  
set = da nu lista  
frame = da nu



<pre> \definennarrower [...] [...] [...] [...] 1  NAME 2  NAME 3  inherits: \seteazaingust </pre>
<pre> \definennote [...] [...] [...] [...] 1  NAME 2  NAME 3  inherits: \setupnote </pre>
<pre> \defineornament [...] [...] [...] [...] 1  NAME 2  alternativ = a b    inherits: \setupcollector 3  stil      = STYLE BEFEHL    culoare   = COLOR    inherits: \seteazainconjurat </pre>
<pre> \defineornament [...] [...] [...] [...] 1  NAME 2  alternativ = a b    inherits: \setuplayer 3  inherits: \setuplayeredtext </pre>
<pre> \defineoutputroutine [...] [...] [...] 1  NAME 2  NAME 3  inherits: \setupoutputroutine </pre>
<pre> \defineoutputroutinecommand [...,*...] *  KEY </pre>
<pre> \definepage [...] [...] 1  NAME 2  REFERENCE </pre>
<pre> \definepagebreak [...] [...] 1  NAME 2  gol antet subsol dummy incadrat NUMMER +NUMMER implicit reset dezactivat da nu marcaj blank preferinta preferintamare    stanga dreapta par impar cvadрупul ultim ultimapagina start stop </pre>
<pre> \definepagechecker [...] [...] [...] 1  NAME 2  NAME 3  inherits: \setuppagechecker </pre>
<pre> \definepagecolumns [...] [...] [...] 1  NAME 2  NAME 3  inherits: \setuppagecolumns </pre>
<pre> \definepageinjection [...] [...] [...] 1  NAME 2  NAME 3  inherits: \setuppageinjection </pre>
<pre> \definepageinjectionalternative [...] [...] [...] 1  NAME 2  NAME 3  inherits: \setuppageinjectionalternative </pre>
<pre> \definepageshift [...] [...] [...] 1  NAME 2  orizontal vertical 3  DIMENSION </pre>

<pre> \definepagestate [...] [...] [...] [...] 1 NAME OPT OPT 2 NAME 3 inherits: \setuppagestate </pre>
<pre> \definepairedbox [...] [...] [...] [...] 1 NAME OPT OPT 2 NAME 3 inherits: \setuppairedbox </pre>
<pre> \defineparagraph [...] [...] [...] [...] 1 NAME OPT OPT 2 NAME 3 inherits: \setupparagraph </pre>
<pre> \defineparallel [...] [...] 1 NAME 2 NAME </pre>
<pre> \defineparbuilder [...] * NAME </pre>
<pre> \defineperiodkerning [...] [...] [...] [...] 1 NAME OPT OPT 2 NAME 3 inherits: \setupperiodkerning </pre>
<pre> \defineplacement [...] [...] [...] [...] 1 NAME OPT OPT 2 NAME 3 inherits: \setupplacement </pre>
<pre> \definepositioning [...] [...] [...] [...] 1 NAME OPT OPT 2 NAME 3 inherits: \setarepozitie </pre>
<pre> \defineprefixset [...] [...] [...] 1 NAME SECTIONBLOCK:NAME OPT 2 ABSCHNITT 3 ABSCHNITT </pre>
<pre> \defineprocesscolor [...] [...] [...] [...] 1 NAME OPT 2 COLOR 3 inherits: \definesteculoare </pre>
<pre> \defineprocessor [...] [...] [...] [...] 1 NAME OPT OPT 2 NAME 3 inherits: \setupprocessor </pre>
<pre> \definepushbutton [...] [...] [...] 1 NAME OPT 2 inherits: \setupfieldcontentframed </pre>
<pre> \definepushsymbol [...] [...] 1 NAME 2 n r d </pre>
<pre> \definerenderingwindow [...] [...] [...] [...] 1 NAME OPT OPT 2 NAME 3 inherits: \setuprenderingwindow </pre>

<pre> \defineresetset [...] [...<sup>2</sup>,...] [...<sup>3</sup>] 1  NAME SECTIONBLOCK:NAME 2  NUMMER 3  NUMMER </pre>
<pre> \defineruby [...] [...<sup>2</sup>] [...,...<sup>3</sup>,...] 1  NAME 2  NAME 3  inherits: \setupruby </pre>
<pre> \definescale [...] [...<sup>2</sup>] [...,...<sup>3</sup>,...] 1  NAME 2  NAME 3  inherits: \setupscale </pre>
<pre> \definescript [...] [...<sup>2</sup>] [...,...<sup>3</sup>,...] 1  NAME 2  NAME 3  inherits: \setupscript </pre>
<pre> \definesectionlevels [...] [...<sup>2</sup>,...] 1  NAME 2  ABSCHNITT </pre>
<pre> \defineselector [...] [...,...<sup>2</sup>,...] 1  NAME 2  inherits: \setupselector </pre>
<pre> \defineseparatorset [...] [...<sup>2</sup>,...] [...<sup>3</sup>] 1  NAME SECTIONBLOCK:NAME 2  BEFEHL PROCESSOR-&gt;BEFEHL 3  BEFEHL PROCESSOR-&gt;BEFEHL </pre>
<pre> \defineshift [...] [...<sup>2</sup>] [...,...<sup>3</sup>,...] 1  NAME 2  NAME 3  inherits: \setupshift </pre>
<pre> \definesidebar [...] [...<sup>2</sup>] [...,...<sup>3</sup>,...] 1  NAME 2  NAME 3  inherits: \setupsidebar </pre>
<pre> \definesort [...] [...<sup>2</sup>] [...<sup>3</sup>] {...<sup>4</sup>} 1  da nu 2  SINGULAR 3  NAME 4  CONTENT </pre>
<pre> \definespotcolor [...] [...<sup>2</sup>] [...,...<sup>3</sup>,...] 1  NAME 2  COLOR 3  a = NUMMER niciunul normal multiply ecran overlay softlight hardlight colordodge colorburn darken lighten     difference exclusion hue saturation culoare luminosity     t = NUMMER     e = TEXT     p = NUMMER </pre>
<pre> \defineste [...] [...<sup>2</sup>] {...<sup>3</sup>} 1  NUMMER 2  CSNAME 3  CONTENT </pre>

\definesteaccent <sup>1</sup>... <sup>2</sup>... <sup>3</sup>...

- 1 CHARACTER
- 2 CHARACTER
- 3 CHARACTER

\definesteantet [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

- 1 NAME
- 2 ABSCHNITT
- 3 inherits: \seteazatitlu

\definestebloc [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \seteazabloc

\definesteblocsectiune [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \seteazablocsectiune

\definestebuffer [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

- 1 NAME
- 2 BUFFER
- 3 inherits: \seteazabuffer

\definestecamp [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...] [<sup>4</sup>...,...] [<sup>5</sup>...]

- 1 NAME
- 2 radio sub text linie push check signature
- 3 NAME
- 4 NAME
- 5 NAME

\definestecaracter <sup>1</sup>... <sup>2</sup>...

- 1 CHARACTER
- 2 NUMMER

\definestecomanda <sup>1</sup>... <sup>2</sup>...

- 1 CHARACTER
- 2 BEFEHL

\definesteconversie [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...]

- 1 SPRACHE
- 2 NAME
- 3 CSNAME

\definesteconversie [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

- 1 SPRACHE
- 2 NAME
- 3 TEXT

\definesteculoare [<sup>1</sup>...] [<sup>2</sup>...,...]

- 1 NAME
- 2 r = NUMMER  
g = NUMMER  
b = NUMMER  
c = NUMMER  
m = NUMMER  
y = NUMMER  
k = NUMMER  
h = NUMMER  
s = NUMMER  
v = NUMMER  
x = NUMMER  
a = NUMMER niciunul normal multiply ecran overlay softlight hardlight colordodge colorburn darken lighten  
difference exclusion hue saturation culoare luminosity  
t = NUMMER

**\definesteculoare** [<sup>1</sup>...] [<sup>2</sup>...]

- 1 NAME
- 2 COLOR

**\definestedescriere** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...<sup>3</sup>...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \setupdescription

**\definestedimensiunehartie** [<sup>1</sup>...] [<sup>2</sup>...,...<sup>2</sup>...,...]

- 1 NAME
- 2 latime = DIMENSION
- inaltime = DIMENSION
- sus = BEFEHL
- jos = BEFEHL
- stanga = BEFEHL
- dreapta = BEFEHL
- distanta = DIMENSION
- pagina = inherits: \seteazadimensiunihartie
- hartie = inherits: \seteazadimensiunihartie

**\definestedimensiunehartie** [<sup>1</sup>...] [<sup>2</sup>...,...<sup>2</sup>...] [<sup>3</sup>...,...<sup>3</sup>...,...]

- 1 NAME
- 2 inherits: \seteazadimensiunihartie
- 3 inherits: \seteazadimensiunihartie

**\definesteenumerare** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...<sup>3</sup>...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \setupenumeration

**\definesteeticheta** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...<sup>3</sup>...,...]

- 1 NAME
- 2 NAME
- 3 inherits: \setuplabel

**\definestefloat** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...<sup>3</sup>...,...]

- 1 SINGULAR
  - 2 SINGULAR PLURAL
  - 3 inherits: \seteazafloat
- instances: chemical figure table intermezzo graphic

**\definestefloat** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...]

- 1 SINGULAR
  - 2 PLURAL
  - 3 SINGULAR
- instances: chemical figure table intermezzo graphic

**\definestefont** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...<sup>3</sup>...,...]

- 1 NAME
- 2 FONT
- 3 inherits: \seteazaspatiuinterliniar

```

\definestefonttext [...] [...] [...] [...]
1 NAME implicit
2 NAME DIMENSION
3 rm ss tt hw cg
4 tf = FILE
bf = FILE
it = FILE
sl = FILE
bi = FILE
bs = FILE
sc = FILE
mr = FILE
mrlr = FILE
mrrl = FILE
mb = FILE
mblr = FILE
mbrl = FILE

```

```

\definestefonttext [...] [...] [...] [...]
1 NAME implicit
2 NAME DIMENSION
3 rm ss tt hw cg
4 NAME

```

```

\definestefont [...] [...] [...]
1 NAME
2 FONT
3 NAME

```

```

\definesteformatreferinte [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupreferenceformat

```

```

\definestegrupculori [...] [...] [x:y:z,...]
1 NAME
2 gri rgb cmyk spot
3 TRIPLET

```

```

\definestehbox [...] [...]
1 NAME
2 DIMENSION

```

```

\definesteinconjurare [...] [...] [...]
1 NAME
2 NAME
3 inherits: \seteazainconjurat

```

```

\definestelista [...] [...] [...]
1 NAME
2 LISTE
3 inherits: \seteazalista

```

```

\definestelistacombinata [...] [...] [...]
1 NAME
2 LISTE
3 inherits: \seteazalistacombinata

```

```

\definestemakeup [...] [...] [...]
1 NAME
2 NAME
3 inherits: \seteazamakeup

```

```

\definestemarcaje [...] [...] [...]
1 NAME
2 BESCHRIFTUNG
3 inherits: \seteazamarcaje

```

```

\definestemediulfonttext [...] [...] [...]
1 NAME OPT OPT
2 implicit DIMENSION
3 mare = DIMENSION NUMBER
mic = DIMENSION NUMBER
a = DIMENSION NUMBER
b = DIMENSION NUMBER
c = DIMENSION NUMBER
d = DIMENSION NUMBER
text = DIMENSION NUMBER
x = DIMENSION NUMBER
xx = DIMENSION NUMBER
script = DIMENSION NUMBER
scriptscript = DIMENSION NUMBER
spatiereinterliniara = DIMENSION
em = inclinat italic STYLE BEFEHL
* = NUMBER

```

```

\definestemeniuiinteractiune [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \seteazameniuiinteractiune

```

```

\definesteoverlay [...] [...] [...]
1 NAME OPT
2 NAME
3 BEFEHL

```

```

\definestepaleta [...] [...]
1 NAME
2 NAME = COLOR

```

```

\definestepaleta [...] [...]
1 NAME
2 NAME

```

```

\definesteparagraf [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \seteazaparagrafe

```

```

\definesteprofil [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupprofile

```

```

\definesteprogram [...] [...] [...]
1 NAME OPT
2 TEXT
3 TEXT

```

```

\definestereferinte [...] [...]
1 NAME
2 REFERENCE

```

```

\definesteregistru [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \seteazaregistru

```

```

\definestesablontabel [...] [...] [...]
1 NAME OPT OPT
2 TEMPLATE
3 NAME
4 NAME

```

<pre> \definestesectione [...] *   NAME </pre>
<pre> \definestesimbol [...] [...] [...] 1   NAME          OPT 2   NAME 3   BEFEHL </pre>
<pre> \definestesimbolfigura [...] [...] [...] [...] 1   NAME          OPT 2   FILE NAME 3   inherits: \figuraexterna </pre>
<pre> \definestesinonim [...] [...] [...] [...] 1   SINGULAR      OPT   OPT 2   PLURAL 3   CSNAME 4   CSNAME </pre>
<pre> \definestesinonimfont [...] [...] [...] [...] 1   NAME          OPT 2   FONT 3   features      = NAME    fallbacks     = NAME    goodies        = NAME    designsize     = auto implicit </pre>
<pre> \definestesortare [...] [...] [...] 1   SINGULAR      OPT 2   PLURAL 3   niciunul CSNAME </pre>
<pre> \definestestartstop [...] [...] [...] [...] 1   NAME          OPT   OPT 2   NAME 3   inherits: \setupstartstop </pre>
<pre> \definestestil [...] [...] [...] [...] 1   NAME          OPT   OPT 2   NAME 3   inherits: \setupstyle </pre>
<pre> \definestestilfont [...] [...] [...] 1   NAME 2   NAME </pre>
<pre> \definestestivacampuri [...] [...] [...] [...] 1   NAME          OPT 2   NAME 3   inherits: \setupfieldcategory </pre>
<pre> \definestesubcamp [...] [...] [...] [...] 1   NAME 2   NAME 3   NAME </pre>
<pre> \definestetabulatori [...] [...] [...] [...] 1   NAME          OPT   OPT 2   NAME 3   TEMPLATE </pre>



<pre> \definestetext [...] [...] [...] [...] [...] [...] [...] 1  NAME                                OPT      OPT      OPT      OPT 2  sus antet text subsol subsol 3  text margine bordura 4  data numarpagina BESCHRIFTUNG TEXT BEFEHL 5  data numarpagina BESCHRIFTUNG TEXT BEFEHL 6  data numarpagina BESCHRIFTUNG TEXT BEFEHL 7  data numarpagina BESCHRIFTUNG TEXT BEFEHL </pre>
<pre> \definestetexteinconjugate [...] [...] [...] 1  NAME                                OPT 2  inherits: \setupframedtext </pre>
<pre> \definestetextinconjurat [...] [...] [...] 1  NAME                                OPT      OPT 2  NAME 3  inherits: \setupframedtext </pre>
<pre> \definestetyping [...] [...] [...] 1  NAME                                OPT      OPT 2  NAME 3  inherits: \seteazatyping </pre>
<pre> \definestyleinstance [...] [...] [...] 1  NAME                                OPT      OPT 2  rm ss tt mm hw cg 3  tf bf it sl bi bs sc 4  BEFEHL </pre>
<pre> \definesubformula [...] [...] [...] 1  NAME                                OPT      OPT 2  NAME 3  inherits: \setupsubformula </pre>
<pre> \definesynonym [...] [...] [...] {...} {...} 1  da nu                                OPT 2  SINGULAR 3  NAME 4  TEXT 5  CONTENT </pre>
<pre> \definesystemattribute [...] [...] 1  NAME                                OPT 2  local global public private pickup </pre>
<pre> \definesystemconstant {...} *  NAME </pre>
<pre> \definesystemvariable {...} *  NAME </pre>
<pre> \defineTABLEsetup [...] [...] 1  NAME 2  inherits: \setupTABLE </pre>
<pre> \definetabulation [...] [...] [...] 1  NAME                                OPT      OPT 2  NAME 3  inherits: \setuptabulation </pre>
<pre> \definetextbackground [...] [...] [...] 1  NAME                                OPT      OPT 2  NAME 3  inherits: \setuptextbackground </pre>

<pre> \definetextflow [...] [...] [...] [...] 1  NAME 2  NAME 3  inherits: \setuptextflow </pre>
<pre> \definetokenlist [...] *  NAME </pre>
<pre> \definetooltip [...] [...] [...] [...] 1  NAME 2  NAME 3  inherits: \setuptooltip </pre>
<pre> \definetransparency [...] [...] 1  NAME 2  NUMMER </pre>
<pre> \definetransparency [...] [...] 1  NAME 2  a = NUMMER niciunul normal multiply ecran overlay softlight hardlight colordodge colorburn darken lighten     difference exclusion hue saturation culoare luminosity     t = NUMMER </pre>
<pre> \definetransparency [...] [...] 1  NAME 2  NAME </pre>
<pre> \definetwopasslist {...} *  NAME </pre>
<pre> \definetype [...] [...] [...] [...] 1  NAME 2  NAME 3  inherits: \seteazatype </pre>
<pre> \definetypeface [...] [...] [...] [...] [...] [...] [...] 1  NAME 2  rm ss tt mm hw cg 3  serif sans mono math handwriting calligraphy 4  NAME 5  implicit dtp 6  rscale      = auto NUMMER    features    = NAME    fallbacks   = NAME    goodies     = NAME    designsize  = auto implicit    directie    = ambele </pre>
<pre> \definetypescriptprefix [...] [...] 1  NAME 2  TEXT </pre>
<pre> \definetypescriptsynonym [...] [...] 1  NAME 2  TEXT </pre>
<pre> \definetypesetting [...] [...] [...] [...] 1  NAME 2  TEXT 3  inherits: \setupexternalfigure </pre>
<pre> \defineunit [...] [...] [...] [...] 1  NAME 2  NAME 3  inherits: \setupunit </pre>

**\defineuserdata** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...<sup>3</sup>...,...]

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupuserdata

**\defineuserdataalternative** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...<sup>3</sup>...,...]

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupuserdataalternative

**\defineviewerlayer** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...<sup>3</sup>...,...]

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupviewerlayer

**\definevspace** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...]

- 1 NAME OPT
- 2 NAME
- 3 DIMENSION

**\definevspacing** [<sup>1</sup>...] [<sup>2</sup>...]

- 1 NAME
- 2 inherits: \vspacing

**\definevspacingamount** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...]

- 1 NAME OPT OPT
- 2 DIMENSION
- 3 DIMENSION

**\definetable** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...<sup>3</sup>...,...]

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupxtable

**\delimited** [<sup>1</sup>...] [<sup>2</sup>...] {<sup>3</sup>...}

- 1 NAME OPT
- 2 SPRACHE
- 3 CONTENT

**\delimitedtext** [<sup>1</sup>...] [<sup>2</sup>...] {<sup>3</sup>...}

- 1 NAME OPT
- 2 SPRACHE
- 3 CONTENT

**\DELIMITEDTEXT** [<sup>1</sup>...] {<sup>2</sup>...}

- 1 SPRACHE OPT
- 2 CONTENT

instances: quotation quote blockquote speech aside

**\aside** [<sup>1</sup>...] {<sup>2</sup>...}

- 1 SPRACHE OPT
- 2 CONTENT

**\blockquote** [<sup>1</sup>...] {<sup>2</sup>...}

- 1 SPRACHE OPT
- 2 CONTENT

**\quotation** [<sup>1</sup>...] {<sup>2</sup>...}

- 1 SPRACHE OPT
- 2 CONTENT

**\quote** [<sup>1</sup>...] {<sup>2</sup>...}

- 1 SPRACHE OPT
- 2 CONTENT

<code>\speech [...] {...}</code> 1 SPRACHE <small>OPT</small> 2 CONTENT
<code>\depthofstring {...}</code> * TEXT
<code>\depthonlybox {...}</code> * CONTENT
<code>\depthspanningtext {...} {...} {...}</code> 1 TEXT 2 DIMENSION 3 FONT
<code>\depthstrut</code>
<code>\DESCRIERE [...,<sup>1</sup>...] {...<sup>2</sup>} ...<sup>3</sup> \par</code> 1 REFERENCE <small>OPT</small> <small>OPT</small> 2 TEXT 3 CONTENT
<code>\despre [...]</code> * REFERENCE
<code>\determinacaracteristicilelistei [...,<sup>1</sup>...] [...,<sup>2</sup>...<sup>2</sup>...]</code> 1 LISTE 2 inherits: \seteazalista <small>OPT</small>
<code>\determinacaracteristiciregistru [...<sup>1</sup>] [...<sup>2</sup>...<sup>2</sup>...]</code> 1 NAME <small>OPT</small> 2 language = implicit DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scn SPRACHE metoda = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc numberorder = numere compress = da nu tot criteriu = local text curent precedent tot ABSCHNITT
<code>\determinanumartitlu [...]</code> * ABSCHNITT
<code>\determinenoflines {...}</code> * CONTENT
<code>\devanagarinumerals {...}</code> * NUMMER
<code>\digits {...}</code> * NUMMER
<code>\digits ...</code> * NUMMER
<code>\dimensiontocount {...} \<sup>2</sup>...</code> 1 DIMENSION 2 CSNAME
<code>\din [...]</code> * REFERENCE

\directboxfromcache {...} {...} 1 NAME 2 NUMMER TEXT
\directcolor [...] * COLOR
\directcolored [...,... <sup>*</sup> ...,...] * inherits: \definesteculoare
\directcolored [...] * COLOR
\directconvertedcounter {...} {...} 1 NAME 2 primul precedent urmatorul ultim numar
\directcopyboxfromcache {...} {...} 1 NAME 2 NUMMER TEXT
\directdummysparameter {...} * KEY
\directgetboxllx ... * CSNAME NUMMER
\directgetboxlly ... * CSNAME NUMMER
\directhighlight {...} {...} 1 NAME 2 TEXT
\directlocalframed [... <sup>1</sup> ] {... <sup>2</sup> } 1 NAME 2 CONTENT
\directluacode {...} * BEFEHL
\directselect {... <sup>1</sup> } {... <sup>2</sup> } {... <sup>3</sup> } {... <sup>4</sup> } {... <sup>5</sup> } {... <sup>6</sup> } 1 NAME OPT OPT OPT OPT OPT 2 CONTENT 3 CONTENT 4 CONTENT 5 CONTENT 6 CONTENT
\directsetbar {...} * NAME
\directsetup {...} * NAME
\directsymbol {... <sup>1</sup> } {... <sup>2</sup> } 1 NAME 2 NAME

$\backslash\mathrm{directvspacing}\{...,*,...\}$ * inherits: $\backslash\mathrm{vspacing}$
$\backslash\mathrm{dis}\{...\}$ * CONTENT
$\backslash\mathrm{disabledirectives}\{...,*,...\}$ * NAME
$\backslash\mathrm{disableexperiments}\{...,*,...\}$ * NAME
$\backslash\mathrm{disablemode}\{...,*,...\}$ * NAME
$\backslash\mathrm{disableoutputstream}$
$\backslash\mathrm{disableparpositions}$
$\backslash\mathrm{disableregime}$
$\backslash\mathrm{disabletrackers}\{...,*,...\}$ * NAME
$\backslash\mathrm{displaymath}\{...\}$ * CONTENT
$\backslash\mathrm{displaymathematics}\{...\}$ * CONTENT
$\backslash\mathrm{displaymessage}\{...\}$ * TEXT
$\backslash\mathrm{distributedhsize}\{...\}^1\{...\}^2\{...\}^3$ 1 DIMENSION 2 DIMENSION 3 NUMMER
$\backslash\mathrm{dividedsize}\{...\}^1\{...\}^2\{...\}^3$ 1 DIMENSION 2 DIMENSION 3 NUMMER
$\backslash\mathrm{doadaptleftskip}\{...\}$ * da nu standard DIMENSION
$\backslash\mathrm{doadaptrightskip}\{...\}$ * da nu standard DIMENSION
$\backslash\mathrm{doaddfeature}\{...,*,...\}$ * NAME
$\backslash\mathrm{doassign}\{...\}^1\{...\}^2$ 1 TEXT 2 KEY = VALUE

<code>\doassignempty [.<sup>1</sup>.] [..<sup>2</sup>..]</code> 1 TEXT 2 KEY = VALUE
<code>\doboundtext {...} {...} {...}</code> 1 TEXT 2 DIMENSION 3 BEFEHL
<code>\docheckassignment {...}</code> * TEXT
<code>\docheckedpagestate {.<sup>1</sup>.} {..<sup>2</sup>.} {...} {..<sup>4</sup>.} {..<sup>5</sup>.} {..<sup>6</sup>.} {..<sup>7</sup>.}</code> 1 REFERENCE 2 BEFEHL 3 BEFEHL 4 BEFEHL 5 BEFEHL 6 BEFEHL 7 BEFEHL
<code>\docheckedpair {...,*...}</code> * TEXT
<code>\documentvariable {...}</code> * KEY
<code>\dodoubleargument \.<sup>1</sup>. [..<sup>2</sup>.] [..<sup>3</sup>.]</code> 1 CSNAME 2 TEXT 3 TEXT
<code>\dodoubleargumentwithset \.<sup>1</sup>. [...,<sup>2</sup>...] [..<sup>3</sup>.]</code> 1 CSNAME 2 TEXT 3 TEXT
<code>\dodoubleempty \.<sup>1</sup>. [<sup>2</sup>...] [<sup>3</sup>...]</code> 1 CSNAME OPT OPT 2 TEXT 3 TEXT
<code>\dodoubleemptywithset \.<sup>1</sup>. [...,<sup>2</sup>...] [<sup>3</sup>...]</code> 1 CSNAME OPT OPT 2 TEXT 3 TEXT
<code>\dodoublegroupempty \.<sup>1</sup>. {..<sup>2</sup>.} {..<sup>3</sup>.}</code> 1 CSNAME OPT OPT 2 TEXT 3 TEXT
<code>\doeassign [.<sup>1</sup>.] [..<sup>2</sup>..]</code> 1 TEXT 2 KEY = VALUE
<code>\doexpandedrecurse {..<sup>1</sup>.} {..<sup>2</sup>.}</code> 1 NUMMER 2 BEFEHL
<code>\dofastloops {..<sup>1</sup>.} \.<sup>2</sup>.</code> 1 NUMMER 2 CSNAME

\dogetattribute {...} * NAME
\dogetattributeid {...} * NAME
\dogetcommacommandelement <sup>1</sup> ... \from <sup>2</sup> ... \to <sup>3</sup> ... 1 NUMBER 2 TEXT 3 CSNAME
\dogobbledoubleempty [ <sup>1</sup> ...] [ <sup>2</sup> ...] 1 TEXT OPT OPT 2 TEXT
\dogobblesingleempty [ <sup>*</sup> ...] * TEXT OPT
\doif {... <sup>1</sup> } {... <sup>2</sup> } {... <sup>3</sup> } 1 CONTENT 2 CONTENT 3 TRUE
\doifallcommon {..., <sup>1</sup> ...} {..., <sup>2</sup> ...} {... <sup>3</sup> } 1 TEXT 2 TEXT 3 TRUE
\doifallcommonelse {..., <sup>1</sup> ...} {..., <sup>2</sup> ...} {... <sup>3</sup> } {... <sup>4</sup> } 1 TEXT 2 TEXT 3 TRUE 4 FALSE
\doifalldefinedelse {..., <sup>1</sup> ...} {... <sup>2</sup> } {... <sup>3</sup> } 1 NAME 2 TRUE 3 FALSE
\doifallmodes {..., <sup>1</sup> ...} {... <sup>2</sup> } {... <sup>3</sup> } 1 NAME 2 TRUE 3 FALSE
\doifallmodeselse {..., <sup>1</sup> ...} {... <sup>2</sup> } {... <sup>3</sup> } 1 NAME 2 TRUE 3 FALSE
\doifassignmentelse {... <sup>1</sup> } {... <sup>2</sup> } {... <sup>3</sup> } 1 TEXT 2 TRUE 3 FALSE
\doifassignmentelsecs {... <sup>1</sup> } \ <sup>2</sup> ... \ <sup>3</sup> ... 1 TEXT 2 CSNAME 3 CSNAME
\doifblackelse {... <sup>1</sup> } {... <sup>2</sup> } {... <sup>3</sup> } 1 COLOR 2 TRUE 3 FALSE



`\doifbothsides {...} {...} {...}`

1 BEFEHL  
2 BEFEHL  
3 BEFEHL

`\doifbothsidesoverruled {...} {...} {...}`

1 BEFEHL  
2 BEFEHL  
3 BEFEHL

`\doifboxelse {...} {...} {...} {...}`

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

`\doifbufferelse {...} {...} {...}`

1 BUFFER  
2 TRUE  
3 FALSE

`\doifcolor {...} {...}`

1 COLOR  
2 TRUE

`\doifcolorelse {...} {...} {...}`

1 COLOR  
2 TRUE  
3 FALSE

`\doifcommandhandler \... {...} {...}`

1 CSNAME  
2 NAME  
3 TRUE

`\doifcommandhandlerelse \... {...} {...} {...}`

1 CSNAME  
2 NAME  
3 TRUE  
4 FALSE

`\doifcommon {...,1...} {...,2...} {...3}`

1 TEXT  
2 TEXT  
3 TRUE

`\doifcommonelse {...,1...} {...,2...} {...3} {...4}`

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

`\doifcontent {...1} {...2} {...3} \...4 {...5}`

1 BEFEHL  
2 BEFEHL  
3 BEFEHL  
4 CSNAME  
5 CONTENT

`\doifconversiondefinedelse {...1} {...2} {...3}`

1 NAME  
2 TRUE  
3 FALSE

\doifconversionnumberelse {...} {...} {...} {...}

1 NAME  
2 NUMMER  
3 TRUE  
4 FALSE

\doifcounter {...} {...}

1 NAME  
2 TRUE

\doifcounterelse {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifcurrentfonthasfeatureelse {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifdefined {...} {...}

1 NAME  
2 TRUE

\doifdefinedcounter {...} {...}

1 NAME  
2 TRUE

\doifdefinedcounterelse {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifdefinedelse {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifdimensionelse {...} {...} {...}

1 TEXT  
2 TRUE  
3 FALSE

\doifdimenstringelse {...} {...} {...}

1 TEXT  
2 TRUE  
3 FALSE

\doifdocumentargument {...} {...}

1 NAME  
2 TRUE

\doifdocumentargumentelse {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifdocumentfilename {...} {...}

1 NUMMER  
2 TRUE

\doifdocumentfilenameelse {...} {...} {...}

1 NUMBER  
2 TRUE  
3 FALSE

\doifdocumentvariable {...} {...}

1 KEY  
2 TRUE

\doifdocumentvariableelse {...} {...} {...}

1 KEY  
2 TRUE  
3 FALSE

\doifdrawingblackelse {...} {...}

1 TRUE  
2 FALSE

\doifelse {...} {...} {...} {...}

1 CONTENT  
2 CONTENT  
3 TRUE  
4 FALSE

\doifelseallcommon {...,<sup>1</sup>...} {...,<sup>2</sup>...} {...} {...<sup>4</sup>}

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

\doifelsealldefined {...,<sup>1</sup>...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelseallmodes {...,<sup>1</sup>...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelseassignment {...} {...} {...}

1 TEXT  
2 TRUE  
3 FALSE

\doifelseassignmentcs {...} \<sup>2</sup>... \<sup>3</sup>...

1 TEXT  
2 CSNAME  
3 CSNAME

\doifelseblack {...} {...} {...}

1 COLOR  
2 TRUE  
3 FALSE

\doifelsebox {...} {...} {...} {...}

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

\doifelseboxincache {...} {...} {...} {...}

1 NAME  
2 NUMMER TEXT  
3 TRUE  
4 FALSE

\doifelsebuffer {...} {...} {...}

1 BUFFER  
2 TRUE  
3 FALSE

\doifelsecolor {...} {...} {...}

1 COLOR  
2 TRUE  
3 FALSE

\doifelsecommandhandler \... {...} {...} {...}

1 CSNAME  
2 NAME  
3 TRUE  
4 FALSE

\doifelsecommon {...,<sup>1</sup>...} {...,<sup>2</sup>...} {...} {...<sup>4</sup>}

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

\doifelseconversiondefined {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelseconversionnumber {...} {...} {...} {...<sup>4</sup>}

1 NAME  
2 NUMMER  
3 TRUE  
4 FALSE

\doifelsecounter {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsecurrentfonthasfeature {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsecurrentsortingingused {...} {...}

1 TRUE  
2 FALSE

\doifelsecurrentsynonymshown {...} {...}

1 TRUE  
2 FALSE

\doifelsecurrentsynonymused {...} {...}

1 TRUE  
2 FALSE

\doifelsedefined {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsedefinedcounter {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsedimension {...} {...} {...}

1 TEXT  
2 TRUE  
3 FALSE

\doifelsedimenstring {...} {...} {...}

1 TEXT  
2 TRUE  
3 FALSE

\doifelsedocumentargument {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsedocumentfilename {...} {...} {...}

1 NUMBER  
2 TRUE  
3 FALSE

\doifelsedocumentvariable {...} {...} {...}

1 KEY  
2 TRUE  
3 FALSE

\doifelsedrawingblack {...} {...}

1 TRUE  
2 FALSE

\doifelseempty {...} {...} {...}

1 CONTENT  
2 TRUE  
3 FALSE

\doifelseemptyvalue {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelseemptyvariable {...} {...} {...} {...}

1 NAME  
2 KEY  
3 TRUE  
4 FALSE

\doifelseenv {...} {...} {...}

1 KEY  
2 TRUE  
3 FALSE

\doifelsefastoptionalcheck {...} {...}

1 TRUE  
2 FALSE

\doifelsefastoptionalcheckcs \... \...

1 CSNAME  
2 CSNAME

`\doifelsefieldbody {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsefieldcategory {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsefigure {...} {...} {...}`

1 FILE  
2 TRUE  
3 FALSE

`\doifelsefile {...} {...} {...}`

1 FILE  
2 TRUE  
3 FALSE

`\doifelsefiledefined {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsefileexists {...} {...} {...}`

1 FILE  
2 TRUE  
3 FALSE

`\doifelsefirstchar {...} {...} {...} {...}`

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

`\doifelseflagged {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsefontchar {...} {...} {...} {...}`

1 FONT  
2 NUMBER  
3 TRUE  
4 FALSE

`\doifelsefontfeature {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsefontpresent {...} {...} {...}`

1 FONT  
2 TRUE  
3 FALSE

`\doifelsefontsynonym {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

\doifelseframed \<sup>1</sup>... {<sup>2</sup>...} {<sup>3</sup>...}

1 CSNAME  
2 TRUE  
3 FALSE

\doifelsehasspace {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}

1 TEXT  
2 TRUE  
3 FALSE

\doifelsehelp {<sup>1</sup>...} {<sup>2</sup>...}

1 TRUE  
2 FALSE

\doifelseincsname {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...}

1 TEXT  
2 CSNAME  
3 TRUE  
4 FALSE

\doifelseinelement {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}

1 NAME  
2 TRUE  
3 FALSE

\doifelseinputfile {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}

1 FILE  
2 TRUE  
3 FALSE

\doifelseinsertion {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}

1 NAME  
2 TRUE  
3 FALSE

\doifelseinset {<sup>1</sup>...} {<sup>2</sup>...,...} {<sup>3</sup>...} {<sup>4</sup>...}

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

\doifelseinstring {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...}

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

\doifelseinsymbolset {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...}

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

\doifelseintoks {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...}

1 BEFEHL  
2 BEFEHL  
3 TRUE  
4 FALSE

\doifelseintwopassdata {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...}

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

\doifelseitalic {...} {...}

1 TRUE  
2 FALSE

\doifelselanguage {...} {...} {...}

1 SPRACHE  
2 TRUE  
3 FALSE

\doifelselayerdata {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelselayoutdefined {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelselayoutsomeline {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelselayouttextline {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelseleapyear {...} {...} {...}

1 NUMMER  
2 TRUE  
3 FALSE

\doifelselist {...} {...} {...}

1 LISTE  
2 TRUE  
3 FALSE

\doifelselocation {...} {...}

1 TRUE  
2 FALSE

\doifelselocfile {...} {...} {...}

1 FILE  
2 TRUE  
3 FALSE

\doifelseMPgraphic {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsemainfloatbody {...} {...}

1 TRUE  
2 FALSE

\doifelsemarkedpage {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE



\doifelsemarking {...} {...} {...} 1    BESCHRIFTUNG 2    TRUE 3    FALSE
\doifelsemeaning \ <sup>1</sup> ... \ <sup>2</sup> ... {...} {...} 1    CSNAME 2    CSNAME 3    TRUE 4    FALSE
\doifelsemessage {...} {...} {...} {...} 1    NAME 2    NAME NUMMER 3    TRUE 4    FALSE
\doifelsemode {..., <sup>1</sup> ...} {...} {...} 1    NAME 2    TRUE 3    FALSE
\doifelsenextbgroup {...} {...} 1    TRUE 2    FALSE
\doifelsenextbgroupcs \ <sup>1</sup> ... \ <sup>2</sup> ... 1    CSNAME 2    CSNAME
\doifelsenextchar {...} {...} {...} 1    CHARACTER 2    TRUE 3    FALSE
\doifelsenextoptional {...} {...} 1    TRUE 2    FALSE
\doifelsenextoptionalcs \ <sup>1</sup> ... \ <sup>2</sup> ... 1    CSNAME 2    CSNAME
\doifelsenextparenthesis {...} {...} 1    TRUE 2    FALSE
\doifelsenonzeropositive {...} {...} {...} 1    NUMMER 2    TRUE 3    FALSE
\doifelsenoteonsamepage {...} {...} {...} 1    NAME 2    TRUE 3    FALSE
\doifelsenothing {...} {...} {...} 1    TEXT 2    TRUE 3    FALSE

\doifelsenumber {...} {...} {...}

1 TEXT  
2 TRUE  
3 FALSE

\doifelseobjectfound {...} {...} {...} {...}

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

\doifelseobjectreferencefound {...} {...} {...} {...}

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

\doifelseoddpag {^1} {...} {...}

1 BEFEHL  
2 BEFEHL

\doifelseoddpagfloat {...} {...}

1 TRUE  
2 FALSE

\doifelseoldercontext {...} {...} {...}

1 NUMMER  
2 TRUE  
3 FALSE

\doifelseolderversion {...} {...} {...} {...}

1 NUMMER  
2 NUMMER  
3 TRUE  
4 FALSE

\doifelseoverlapping {...} {...} {...} {...}

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

\doifelseoverlay {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelseparallel {...} {..., ...} {...} {...}

1 NAME  
2 NAME tot  
3 TRUE  
4 FALSE

\doifelseparentfile {...} {...} {...}

1 FILE  
2 TRUE  
3 FALSE

\doifelsepath {...} {...} {...}

1 PATH  
2 TRUE  
3 FALSE

\doifelsepathexists {...} {...} {...}

1 PATH  
2 TRUE  
3 FALSE

\doifelsepatterns {...} {...} {...}

1 SPRACHE  
2 TRUE  
3 FALSE

\doifelseposition {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsepositionaction {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsepositiononpage {...} {...} {...} {...}

1 NAME  
2 NUMMER  
3 TRUE  
4 FALSE

\doifelsepositionsonsamepage {...,<sup>1</sup>...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsepositionsonthispage {...,<sup>1</sup>...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsepositionsused {...} {...}

1 TRUE  
2 FALSE

\doifelserreferencefound {...} {...} {...}

1 REFERENCE  
2 TRUE  
3 FALSE

\doifelserrightpage {...} {...}

1 TRUE  
2 FALSE

\doifelserrightpagefloat {...} {...}

1 TRUE  
2 FALSE

\doifelserrighttoleftinbox ...<sup>1</sup> {...} {...}

1 CSNAME NUMMER  
2 TRUE  
3 FALSE

\doifelsesamelinereference {...} {...} {...}

1 REFERENCE  
2 TRUE  
3 FALSE

```
\doifelsesamestring {...} {...} {...} {...}
1 TEXT
2 TEXT
3 TRUE
4 FALSE
```

```
\doifelsesetups {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

```
\doifelsesomebackground {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

```
\doifelsesomespace {...} {...} {...}
1 TEXT
2 TRUE
3 FALSE
```

```
\doifelsesomething {...} {...} {...}
1 TEXT
2 TRUE
3 FALSE
```

```
\doifelsesometoks \... {...} {...}
1 CSNAME
2 TRUE
3 FALSE
```

```
\doifelsestringinstr {...} {...} {...} {...}
1 TEXT
2 TEXT
3 TRUE
4 FALSE
```

```
\doifelsestructurelisthasnumber {...} {...}
1 TRUE
2 FALSE
```

```
\doifelsestructurelisthaspage {...} {...}
1 TRUE
2 FALSE
```

```
\doifelsesymboldefined {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

```
\doifelsesymbolset {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

```
\doifelsetext {...} {...} {...}
1 TEXT
2 TRUE
3 FALSE
```

```
\doifelsetextflow {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

\doifsettextflowcollector {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifsettopofpage {...} {...}

1 TRUE  
2 FALSE

\doifsettypingfile {...} {...} {...}

1 FILE  
2 TRUE  
3 FALSE

\doifelseundefined {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelseurldefined {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsevalue {...} {...} {...} {...}

1 NAME  
2 TEXT  
3 TRUE  
4 FALSE

\doifelsevaluenothing {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsevariable {...} {...} {...} {...}

1 NAME  
2 KEY  
3 TRUE  
4 FALSE

\doifempty {...} {...}

1 CONTENT  
2 TRUE

\doifemptyelse {...} {...} {...}

1 CONTENT  
2 TRUE  
3 FALSE

\doifemptytoks \... {...}

1 CSNAME  
2 TRUE

\doifemptyvalue {...} {...}

1 NAME  
2 TRUE

\doifemptyvalueelse {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

`\doifemptyvariable {...} {...} {...}`

1 NAME  
2 KEY  
3 TRUE

`\doifemptyvariableelse {...} {...} {...} {...}`

1 NAME  
2 KEY  
3 TRUE  
4 FALSE

`\doifenv {...} {...}`

1 KEY  
2 TRUE

`\doifenvelse {...} {...} {...}`

1 KEY  
2 TRUE  
3 FALSE

`\doiffastoptionalcheckcselse \1... \2...`

1 CSNAME  
2 CSNAME

`\doiffastoptionalcheckelse {...} {...}`

1 TRUE  
2 FALSE

`\doiffielddbbodyelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doiffielddcategoryelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doiffigureelse {...} {...} {...}`

1 FILE  
2 TRUE  
3 FALSE

`\doiffile {...} {...}`

1 FILE  
2 TRUE

`\doiffiledefinedelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doiffileelse {...} {...} {...}`

1 FILE  
2 TRUE  
3 FALSE

`\doiffileexistselse {...} {...} {...}`

1 FILE  
2 TRUE  
3 FALSE

```
\doiffirstcharelse {...} {...} {...} {...}
1 TEXT
2 TEXT
3 TRUE
4 FALSE
```

```
\doiffaggedelse {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

```
\doiffontcharelse {...} {...} {...} {...}
1 FONT
2 NUMMER
3 TRUE
4 FALSE
```

```
\doiffontfeatureelse {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

```
\doiffontpresentelse {...} {...} {...}
1 FONT
2 TRUE
3 FALSE
```

```
\doiffontsynonymelse {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

```
\doifhasspaceelse {...} {...} {...}
1 TEXT
2 TRUE
3 FALSE
```

```
\doifhelpelse {...} {...}
1 TRUE
2 FALSE
```

```
\doifincsnameelse {...} {...} {...} {...}
1 TEXT
2 CSNAME
3 TRUE
4 FALSE
```

```
\doifinelementelse {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

```
\doifinputfileelse {...} {...} {...}
1 FILE
2 TRUE
3 FALSE
```

```
\doifinsertionelse {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

`\doifinset {...} {...,2...} {...3}`

1 TEXT  
2 TEXT  
3 TRUE

`\doifinsetelse {...} {...,2...} {...} {...4}`

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

`\doifinstring {...} {...2} {...3}`

1 TEXT  
2 TEXT  
3 TRUE

`\doifinstringelse {...} {...2} {...} {...4}`

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

`\doifinsymbolset {...} {...} {...} {...4}`

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

`\doifinsymbolsetelse {...} {...} {...} {...4}`

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

`\doifintokselse {...} {...} {...} {...4}`

1 BEFEHL  
2 BEFEHL  
3 TRUE  
4 FALSE

`\doifintwopassdataelse {...} {...} {...} {...4}`

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

`\doifitalicelse {...} {...}`

1 TRUE  
2 FALSE

`\doiflanguageelse {...} {...2} {...3}`

1 SPRACHE  
2 TRUE  
3 FALSE

`\doiflayerdataelse {...1} {...2} {...3}`

1 NAME  
2 TRUE  
3 FALSE

`\doiflayoutdefinedelse {...} {...2} {...3}`

1 NAME  
2 TRUE  
3 FALSE



`\doiflayoutsomelineelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doiflayouttextlineelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifleapyearelse {...} {...} {...}`

1 NUMBER  
2 TRUE  
3 FALSE

`\doiflistelse {...} {...} {...}`

1 LISTE  
2 TRUE  
3 FALSE

`\doiflocationelse {...} {...}`

1 TRUE  
2 FALSE

`\doiflocfileelse {...} {...} {...}`

1 FILE  
2 TRUE  
3 FALSE

`\doifMPgraphicelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifmainfloatbodyelse {...} {...}`

1 TRUE  
2 FALSE

`\doifmarkingelse {...} {...} {...}`

1 BESCHRIFTUNG  
2 TRUE  
3 FALSE

`\doifmeaningelse \... \... {...} {...}`

1 CSNAME  
2 CSNAME  
3 TRUE  
4 FALSE

`\doifmessageelse {...} {...} {...} {...}`

1 NAME  
2 NAME NUMBER  
3 TRUE  
4 FALSE

`\doifmode {...,1...} {...2}`

1 NAME  
2 TRUE

`\doifmodeelse {...,1...} {...2} {...3}`

1 NAME  
2 TRUE  
3 FALSE

\doifnextbgroupcselectse \ <sup>1</sup> ... \ <sup>2</sup> ... 1 CSNAME 2 CSNAME
\doifnextbgroupelse { <sup>1</sup> ...} { <sup>2</sup> ...} 1 TRUE 2 FALSE
\doifnextcharelse { <sup>1</sup> ...} { <sup>2</sup> ...} { <sup>3</sup> ...} 1 CHARACTER 2 TRUE 3 FALSE
\doifnextoptionalcselectse \ <sup>1</sup> ... \ <sup>2</sup> ... 1 CSNAME 2 CSNAME
\doifnextoptionalelse { <sup>1</sup> ...} { <sup>2</sup> ...} 1 TRUE 2 FALSE
\doifnextparenthesiselse { <sup>1</sup> ...} { <sup>2</sup> ...} 1 TRUE 2 FALSE
\doifnonzeropositiveelse { <sup>1</sup> ...} { <sup>2</sup> ...} { <sup>3</sup> ...} 1 NUMMER 2 TRUE 3 FALSE
\doifnot { <sup>1</sup> ...} { <sup>2</sup> ...} { <sup>3</sup> ...} 1 CONTENT 2 CONTENT 3 TRUE
\doifnotallcommon {..., <sup>1</sup> ...} {..., <sup>2</sup> ...} {..., <sup>3</sup> ...} 1 TEXT 2 TEXT 3 TRUE
\doifnotallmodes {..., <sup>1</sup> ...} { <sup>2</sup> ...} { <sup>3</sup> ...} 1 NAME 2 TRUE 3 FALSE
\doifnotcommandhandler \ <sup>1</sup> ... { <sup>2</sup> ...} { <sup>3</sup> ...} 1 CSNAME 2 NAME 3 TRUE
\doifnotcommon {..., <sup>1</sup> ...} {..., <sup>2</sup> ...} {..., <sup>3</sup> ...} 1 TEXT 2 TEXT 3 TRUE
\doifnotcounter { <sup>1</sup> ...} { <sup>2</sup> ...} 1 NAME 2 TRUE
\doifnotdocumentargument { <sup>1</sup> ...} { <sup>2</sup> ...} 1 NAME 2 TRUE

<pre> \doifnotdocumentfilename {...} {...} 1  NUMMER 2  TRUE </pre>
<pre> \doifnotdocumentvariable {...} {...} 1  KEY 2  TRUE </pre>
<pre> \doifnotempty {...} {...} 1  CONTENT 2  TRUE </pre>
<pre> \doifnotemptyvalue {...} {...} 1  NAME 2  TRUE </pre>
<pre> \doifnotemptyvariable {...} {...} {...} 1  NAME 2  KEY 3  TRUE </pre>
<pre> \doifnotenv {...} {...} 1  KEY 2  TRUE </pre>
<pre> \doifnoteonsamepageelse {...} {...} {...} 1  NAME 2  TRUE 3  FALSE </pre>
<pre> \doifnotescollected {...} {...} 1  NAME 2  TRUE </pre>
<pre> \doifnotfile {...} {...} 1  FILE 2  TRUE </pre>
<pre> \doifnotflagged {...} {...} 1  NAME 2  TRUE </pre>
<pre> \doifnothing {...} {...} 1  TEXT 2  TRUE </pre>
<pre> \doifnothingelse {...} {...} {...} 1  TEXT 2  TRUE 3  FALSE </pre>
<pre> \doifnotinset {...} {...<sup>2</sup>,...} {...<sup>3</sup>} 1  TEXT 2  TEXT 3  TRUE </pre>
<pre> \doifnotinsidesplitfloat {...} *  TRUE </pre>
<pre> \doifnotinstring {...} {...} {...} 1  TEXT 2  TEXT 3  TRUE </pre>

<pre> \doifnotmode {...<sup>1</sup>,...} {...<sup>2</sup>} 1 NAME 2 TRUE </pre>
<pre> \doifnotnumber {...<sup>1</sup>} {...<sup>2</sup>} 1 TEXT 2 TRUE </pre>
<pre> \doifnotsamestring {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>} 1 TEXT 2 TEXT 3 TRUE </pre>
<pre> \doifnotsetups {...<sup>1</sup>} {...<sup>2</sup>} 1 NAME 2 TRUE </pre>
<pre> \doifnotvalue {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>} 1 NAME 2 TEXT 3 TRUE </pre>
<pre> \doifnotvariable {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>} 1 NAME 2 KEY 3 TRUE </pre>
<pre> \doifnumber {...<sup>1</sup>} {...<sup>2</sup>} 1 TEXT 2 TRUE </pre>
<pre> \doifnumberelse {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>} 1 TEXT 2 TRUE 3 FALSE </pre>
<pre> \doifobjectfoundelse {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>} {...<sup>4</sup>} 1 NAME 2 NAME 3 TRUE 4 FALSE </pre>
<pre> \doifobjectreferencefoundelse {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>} {...<sup>4</sup>} 1 NAME 2 NAME 3 TRUE 4 FALSE </pre>
<pre> \doifoddpageelse {...<sup>1</sup>} {...<sup>2</sup>} 1 BEFEHL 2 BEFEHL </pre>
<pre> \doifoddpagefloatelse {...<sup>1</sup>} {...<sup>2</sup>} 1 TRUE 2 FALSE </pre>
<pre> \doifoldercontextelse {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>} 1 NUMMER 2 TRUE 3 FALSE </pre>

```
\doifolderversionelse {...} {...} {...} {...}
1  NUMMER
2  NUMMER
3  TRUE
4  FALSE
```

```
\doifoverlappingelse {...} {...} {...} {...}
1  NAME
2  NAME
3  TRUE
4  FALSE
```

```
\doifoverlayelse {...} {...} {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifparallelelse {...} {...,2...} {...} {...}
1  NAME
2  NAME tot
3  TRUE
4  FALSE
```

```
\doifparentfileelse {...} {...} {...}
1  FILE
2  TRUE
3  FALSE
```

```
\doifpathelse {...} {...} {...}
1  PATH
2  TRUE
3  FALSE
```

```
\doifpathexistselse {...} {...} {...}
1  PATH
2  TRUE
3  FALSE
```

```
\doifpatternselse {...} {...} {...}
1  SPRACHE
2  TRUE
3  FALSE
```

```
\doifposition {...} {...} {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifpositionaction {...} {...} {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifpositionactionelse {...} {...} {...}
1  NAME
2  TRUE
3  FALSE
```

```
\doifpositionelse {...} {...} {...}
1  NAME
2  TRUE
3  FALSE
```

\doifpositiononpageelse {...} {...} {...} {...}

1 NAME  
2 NUMMER  
3 TRUE  
4 FALSE

\doifpositionsonsamepageelse {...,<sup>1</sup>...} {...<sup>2</sup>} {...<sup>3</sup>}

1 NAME  
2 TRUE  
3 FALSE

\doifpositionsonthispageelse {...,<sup>1</sup>...} {...<sup>2</sup>} {...<sup>3</sup>}

1 NAME  
2 TRUE  
3 FALSE

\doifpositionsusedelse {...<sup>1</sup>} {...<sup>2</sup>}

1 TRUE  
2 FALSE

\doifreferencefoundelse {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>}

1 REFERENCE  
2 TRUE  
3 FALSE

\doifrightpagefloatelse {...<sup>1</sup>} {...<sup>2</sup>}

1 TRUE  
2 FALSE

\doifrighttoleftinboxelse ...<sup>1</sup> {...<sup>2</sup>} {...<sup>3</sup>}

1 CSNAME NUMMER  
2 TRUE  
3 FALSE

\doifsamelinereferenceelse {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>}

1 REFERENCE  
2 TRUE  
3 FALSE

\doifsamestring {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>}

1 TEXT  
2 TEXT  
3 TRUE

\doifsamestringelse {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>} {...<sup>4</sup>}

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

\doifsetups {...<sup>1</sup>} {...<sup>2</sup>}

1 NAME  
2 TRUE

\doifsetupselse {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>}

1 NAME  
2 TRUE  
3 FALSE

\doifsomebackground {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>}

1 NAME  
2 TRUE  
3 FALSE

`\doifsomebackgroundelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifsomespaceelse {...} {...} {...}`

1 TEXT  
2 TRUE  
3 FALSE

`\doifsomething {...} {...}`

1 TEXT  
2 TRUE

`\doifsomethingelse {...} {...} {...}`

1 TEXT  
2 TRUE  
3 FALSE

`\doifsometoks \... {...}`

1 CSNAME  
2 TRUE

`\doifsometokselse \... {...} {...}`

1 CSNAME  
2 TRUE  
3 FALSE

`\doifstringinstringelse {...} {...} {...} {...}`

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

`\doifstructurelisthasnumberelse {...} {...}`

1 TRUE  
2 FALSE

`\doifstructurelisthaspageelse {...} {...}`

1 TRUE  
2 FALSE

`\doifsymboldefinedelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifsymbolsetelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doiftext {...} {...} {...}`

1 TEXT  
2 TRUE  
3 FALSE

`\doiftextelse {...} {...} {...}`

1 TEXT  
2 TRUE  
3 FALSE

`\doiftextflowcollectorelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doiftextflowelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doiftopofpageelse {...} {...}`

1 TRUE  
2 FALSE

`\doiftypingfileelse {...} {...} {...}`

1 FILE  
2 TRUE  
3 FALSE

`\doifundefined {...} {...}`

1 NAME  
2 TRUE

`\doifundefinedcounter {...} {...}`

1 NAME  
2 TRUE

`\doifundefinedelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifunknownfontfeature {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifurldefinedelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifvalue {...} {...} {...}`

1 NAME  
2 TEXT  
3 TRUE

`\doifvalueelse {...} {...} {...} {...}`

1 NAME  
2 TEXT  
3 TRUE  
4 FALSE

`\doifvaluenothing {...} {...}`

1 NAME  
2 TRUE

`\doifvaluenothingelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE



\doifvaluesomething { <sup>1</sup> ..} { <sup>2</sup> ..} 1 NAME 2 TRUE
\doifvariable { <sup>1</sup> ..} { <sup>2</sup> ..} { <sup>3</sup> ..} 1 NAME 2 KEY 3 TRUE
\doifvariableelse { <sup>1</sup> ..} { <sup>2</sup> ..} { <sup>3</sup> ..} { <sup>4</sup> ..} 1 NAME 2 KEY 3 TRUE 4 FALSE
\doindentation
\dollar
\doloop { <sup>*</sup> ..} * BEFEHL
\doloopoverlist { <sup>1</sup> ... <sup>2</sup> ...} { <sup>2</sup> ..} 1 TEXT 2 BEFEHL
\donothing
\dontconvertfont
\dontleavehmode
\dontpermitspacesbetweenengroups
\dopositionaction { <sup>*</sup> ..} * NAME
\doprocesslocalsetups { <sup>*</sup> ... <sup>*</sup> ...} * NAME
\doquadrupleargument \ <sup>1</sup> ... [ <sup>2</sup> ...] [ <sup>3</sup> ...] [ <sup>4</sup> ...] [ <sup>5</sup> ...] 1 CSNAME 2 TEXT 3 TEXT 4 TEXT 5 TEXT
\doquadrupleempty \ <sup>1</sup> ... [ <sup>2</sup> ...] [ <sup>3</sup> ...] [ <sup>4</sup> ...] [ <sup>5</sup> ...] 1 CSNAME OPT OPT OPT OPT 2 TEXT 3 TEXT 4 TEXT 5 TEXT
\doquadruplegroupempty \ <sup>1</sup> ... { <sup>2</sup> ...} { <sup>3</sup> ...} { <sup>4</sup> ...} { <sup>5</sup> ...} 1 CSNAME OPT OPT OPT OPT 2 TEXT 3 TEXT 4 TEXT 5 TEXT

<p><code>\doquintupleargument \<sup>1</sup>... [<sup>2</sup>...] [<sup>3</sup>...] [<sup>4</sup>...] [<sup>5</sup>...] [<sup>6</sup>...]</code></p> <p>1 CSNAME 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT</p>
<p><code>\doquintupleempty \<sup>1</sup>... [<sup>2</sup>...] [<sup>3</sup>...] [<sup>4</sup>...] [<sup>5</sup>...] [<sup>6</sup>...]</code></p> <p>1 CSNAME 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT</p>
<p><code>\doquintuplegroupempty \<sup>1</sup>... {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...} {<sup>5</sup>...} {<sup>6</sup>...}</code></p> <p>1 CSNAME 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT</p>
<p><code>\dorechecknextindentation</code></p>
<p><code>\dorecurse {<sup>1</sup>...} {<sup>2</sup>...}</code></p> <p>1 NUMBER 2 BEFEHL</p>
<p><code>\dorepeatwithcommand [<sup>1</sup>...] \<sup>2</sup>...</code></p> <p>1 TEXT NUMBER*TEXT 2 CSNAME</p>
<p><code>\doreplacefeature {...,*...}</code></p> <p>* NAME</p>
<p><code>\doresetandafffeature {...,*...}</code></p> <p>* NAME</p>
<p><code>\doresetattribute {<sup>*</sup>...}</code></p> <p>* NAME</p>
<p><code>\dorotatebox {<sup>1</sup>...} \<sup>2</sup>... {<sup>3</sup>...}</code></p> <p>1 NUMBER 2 CSNAME 3 CONTENT</p>
<p><code>\dosetattribute {<sup>1</sup>...} {<sup>2</sup>...}</code></p> <p>1 NAME 2 NUMBER</p>
<p><code>\dosetleftskipadaption {<sup>*</sup>...}</code></p> <p>* da nu standard DIMENSION</p>
<p><code>\dosetrighskipadaption {<sup>*</sup>...}</code></p> <p>* da nu standard DIMENSION</p>
<p><code>\dosetupcheckedinterlinespace {...,*...}</code></p> <p>* inherits: \seteazaspatiuinterliniar</p>
<p><code>\dosetupcheckedinterlinespace {...,*...}</code></p> <p>* on dezactivat reset auto mic mediu mare NUMBER DIMENSION</p>

\* NAME

1	CSNAME
2	TEXT
3	TEXT
4	TEXT
5	TEXT
6	TEXT
7	TEXT
8	TEXT

1	CSNAME
2	TEXT
3	TEXT
4	TEXT
5	TEXT
6	TEXT
7	TEXT
8	TEXT

```

1  CSNAME
2  TEXT

```

```

1  CSNAME
2  TEXT

```

```

1  CSNAME
2  TEXT

```

1	CSNAME
2	TEXT
3	TEXT
4	TEXT
5	TEXT
6	TEXT
7	TEXT

1	CSNAME
2	TEXT
3	TEXT
4	TEXT
5	TEXT
6	TEXT
7	TEXT

```
1  NAME
2  NAME
```

- 1 NUMBER
- 2 NUMBER
- 3 [-+] NUMBER
- 4 BEFEHL

\* NAME

`\dotfskip {...}`

\* DIMENSION

`\dotoks \...`

\* CSNAME

`\dotripleargument \1... [2...] [3] [4]`

1 CSNAME  
2 TEXT  
3 TEXT  
4 TEXT

`\dotripleargumentwithset \1... [...,2...] [3] [4]`

1 CSNAME  
2 TEXT  
3 TEXT  
4 TEXT

`\dotripleempty \1... [2] [3] [4]`

1 CSNAME  
2 TEXT  
3 TEXT  
4 TEXT

`\dotripleemptywithset \1... [...,2...] [3] [4]`

1 CSNAME  
2 TEXT  
3 TEXT  
4 TEXT

`\dotriplegroupempty \1... {2...} {3...} {4...}`

1 CSNAME  
2 TEXT  
3 TEXT  
4 TEXT

`\doublebond`

`\dowith {...,1...} {2...}`

1 BEFEHL  
2 BEFEHL

`\dowithnextbox {1...} \2... {3...}`

1 BEFEHL  
2 CSNAME  
3 CONTENT

`\dowithnextboxcontent {1...} {2...} \3... {4...}`

1 BEFEHL  
2 BEFEHL  
3 CSNAME  
4 CONTENT

`\dowithnextboxcontentcs \1... \2... \3... {4...}`

1 CSNAME  
2 CSNAME  
3 CSNAME  
4 CONTENT

`\dowithnextboxcs \1... \2... {3...}`

1 CSNAME  
2 CSNAME  
3 CONTENT

<code>\dowithpargument \*..</code> <code>* CSNAME</code>
<code>\dowithrange {...<sup>1</sup>,...} \*..<sup>2</sup></code> <code>1 NUMBER NUMBER:NUMBER</code> <code>2 CSNAME</code>
<code>\dowithwargument \*..</code> <code>* CSNAME</code>
<code>\dpofstring {...}</code> <code>* TEXT</code>
<code>\dreapta ...</code> <code>* CHARACTER</code>
<code>\dummydigit</code>
<code>\dummyparameter {...}</code> <code>* KEY</code>
<code>\dute {...<sup>1</sup>} [...<sup>2</sup>]</code> <code>1 CONTENT</code> <code>2 REFERENCE</code>
<code>\dutebox {...<sup>1</sup>} [...<sup>2</sup>]</code> <code>1 CONTENT</code> <code>2 REFERENCE</code>
<code>\dutepagina {...<sup>1</sup>} [...<sup>2</sup>]</code> <code>1 TEXT</code> <code>2 REFERENCE</code>
<code>\ETEX</code>
<code>\EveryLine {...}</code> <code>* BEFEHL</code>
<code>\EveryPar {...}</code> <code>* BEFEHL</code>
<code>\ecran [...<sup>*</sup>,...]</code> <code>* inherits: <sup>QPT</sup>\pagina</code>
<code>\edefconvertedargument \*..<sup>1</sup> {...<sup>2</sup>}</code> <code>1 CSNAME</code> <code>2 TEXT</code>
<code>\efcmxheight {...}</code> <code>* NAME</code>
<code>\efcmxwidth {...}</code> <code>* NAME</code>
<code>\efcminheight {...}</code> <code>* NAME</code>

<code>\efcminwidth {...}</code> <code>* NAME</code>
<code>\efcparameter {...} {...}</code> <code>1 NAME</code> <code>2 KEY</code>
<code>\effect [...]{...}</code> <code>1 NAME</code> <code>2 CONTENT</code>
<code>\elapsedseconds</code>
<code>\elapsedtime</code>
<code>\element [...,*...]</code> <code>* REFERENCE OPT</code>
<code>\em</code>
<code>\emphasisboldface</code>
<code>\emphasistypeface</code>
<code>\emptylines [...*...]</code> <code>* NUMMER OPT</code>
<code>\emspace</code>
<code>\enabledirectives [...,*...]</code> <code>* NAME</code>
<code>\enableexperiments [...,*...]</code> <code>* NAME</code>
<code>\enablemode [...,*...]</code> <code>* NAME</code>
<code>\enableoutputstream [...]</code> <code>* NAME</code>
<code>\enableparpositions</code>
<code>\enableregime [...]</code> <code>* cp1250 cp1251 cp1252 cp1253 cp1254 cp1255 cp1256 cp1257 cp1258 8859-1 8859-2 8859-3 8859-4 8859-9 8859-10 8859-13 8859-14 8859-15 8859-16 utf windows-1250 windows-1251 windows-1252 windows-1253 windows-1254 windows-1255 windows-1256 windows-1257 windows-1258 il1 il2 il3 il4 il5 il6 il7 il8 il9 il10 iso-8859-1 iso-8859-2 iso-8859-3 iso-8859-4 iso-8859-9 iso-8859-10 iso-8859-13 iso-8859-14 iso-8859-15 iso-8859-16 latin1 latin2 latin3 latin4 latin5 latin6 latin7 latin8 latin9 latin10 utf-8 utf8 windows</code>
<code>\enabletrackers [...,*...]</code> <code>* NAME</code>
<code>\enskip</code>
<code>\enspace</code>

$\backslash$ ENUMERARE [... <sup>1</sup> ,...] {... <sup>2</sup> } ... <sup>3</sup> \par 1    REFERENCE            OPT            OPT 2    TEXT 3    CONTENT
$\backslash$ env {...} *    KEY
$\backslash$ envvar {... <sup>1</sup> } {... <sup>2</sup> } 1    KEY 2    BEFEHL
$\backslash$ epos {...} *    NAME
$\backslash$ equaldigits {...} *    TEXT
$\backslash$ eTeX
$\backslash$ ETICHETA [... <sup>1</sup> ,...] {... <sup>2</sup> } 1    REFERENCE            OPT            OPT 2    TEXT
$\backslash$ executeifdefined {... <sup>1</sup> } {... <sup>2</sup> } 1    NAME 2    BEFEHL
$\backslash$ exitloop
$\backslash$ exitloopnow
$\backslash$ expandcheckedcsname \... {... <sup>1</sup> } {... <sup>2</sup> } {... <sup>3</sup> } 1    CSNAME 2    KEY 3    TEXT
$\backslash$ expanded {...} *    CONTENT
$\backslash$ expandeddoif {... <sup>1</sup> } {... <sup>2</sup> } {... <sup>3</sup> } 1    CONTENT 2    CONTENT 3    TRUE
$\backslash$ expandeddoifelse {... <sup>1</sup> } {... <sup>2</sup> } {... <sup>3</sup> } {... <sup>4</sup> } 1    CONTENT 2    CONTENT 3    TRUE 4    FALSE
$\backslash$ expandeddoifnot {... <sup>1</sup> } {... <sup>2</sup> } {... <sup>3</sup> } 1    CONTENT 2    CONTENT 3    TRUE
$\backslash$ expandfontsynonym \... {... <sup>1</sup> } {... <sup>2</sup> } 1    CSNAME 2    NAME

`\expdoif {...} {...} {...}`

1 CONTENT  
2 CONTENT  
3 TRUE

`\expdoifcommonelse {...,1...} {...,2...} {...} {...}`

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

`\expdoifelse {...} {...} {...} {...}`

1 CONTENT  
2 CONTENT  
3 TRUE  
4 FALSE

`\expdoifelsecommon {...,1...} {...,2...} {...} {...}`

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

`\expdoifelseinset {...} {...,2...} {...} {...}`

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

`\expdoifinsetelse {...} {...,2...} {...} {...}`

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

`\expdoifnot {...} {...} {...}`

1 CONTENT  
2 CONTENT  
3 TRUE

`\externalfigurecollectionmaxheight {...}`

\* NAME

`\externalfigurecollectionmaxwidth {...}`

\* NAME

`\externalfigurecollectionminheight {...}`

\* NAME

`\externalfigurecollectionminwidth {...}`

\* NAME

`\externalfigurecollectionparameter {...} {...}`

1 NAME  
2 KEY

`\fakebox ...`

\* CSNAME NUMBER

`\faraliniiantetsisubsol`

`\faraliniisussijos`



<code>\faraspatiu</code>
<code>\fastdecrement \...</code> <code>* CSNAME</code>
<code>\fastincrement \...</code> <code>* CSNAME</code>
<code>\fastlocalframed [...]<sup>1</sup> [...,<sup>2</sup>...,...]<sup>2</sup> {...}<sup>3</sup></code> <code>1 NAME</code> <code>2 inherits: \seteazainconjurat</code> <code>3 CONTENT</code>
<code>\fastloopfinal</code>
<code>\fastloopindex</code>
<code>\fastscale {...}<sup>1</sup> {...}<sup>2</sup></code> <code>1 NUMMER</code> <code>2 CONTENT</code>
<code>\fastsetup {...}</code> <code>* NAME</code>
<code>\fastsetupwithargument {...}<sup>1</sup> {...}<sup>2</sup></code> <code>1 NAME</code> <code>2 CONTENT</code>
<code>\fastsetupwithargumentswapped {...}<sup>1</sup> {...}<sup>2</sup></code> <code>1 CONTENT</code> <code>2 NAME</code>
<code>\fastswitchtobodyfont {...}</code> <code>* x xx mic mare script scriptscript</code>
<code>\fastsxsy {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup></code> <code>1 NUMMER</code> <code>2 NUMMER</code> <code>3 CONTENT</code>
<code>\feature [...]<sup>1</sup> [...,<sup>2</sup>...]</code> <code>1 + - = ! &gt; &lt; more less nou reset implicit old local</code> <code>2 NAME</code>
<code>\feature {...}<sup>1</sup> {...,<sup>2</sup>...}</code> <code>1 + - = ! &gt; &lt; more less nou reset implicit old local</code> <code>2 NAME</code>
<code>\fence</code>
<code>\fenced [...]<sup>1</sup> {...}<sup>2</sup></code> <code>1 NAME</code> <code>2 CONTENT</code>
<code>\FENCE {...}</code> <code>* CONTENT</code>

\fetchallmarkings [ <sup>1</sup> ...] [ <sup>2</sup> ...] 1 BESCHRIFTUNG 2 pagina NAME
\fetchallmarks [...] * BESCHRIFTUNG
\fetchmark [ <sup>1</sup> ...] [ <sup>2</sup> ...] 1 BESCHRIFTUNG OPT 2 primul ultim curent precedent urmatorul sus subsol implicit ambele tot first:nochek last:nochek previous:nochek next:nochek top:nochek bottom:nochek
\fetchmarking [ <sup>1</sup> ...] [ <sup>2</sup> ...] [ <sup>3</sup> ...] 1 BESCHRIFTUNG 2 pagina NAME 3 primul ultim curent precedent urmatorul sus subsol implicit ambele tot first:nochek last:nochek previous:nochek next:nochek top:nochek bottom:nochek
\fetchonemark [ <sup>1</sup> ...] [ <sup>2</sup> ...] 1 BESCHRIFTUNG OPT 2 primul ultim curent precedent urmatorul sus subsol implicit ambele tot first:nochek last:nochek previous:nochek next:nochek top:nochek bottom:nochek
\fetchonemarking [ <sup>1</sup> ...] [ <sup>2</sup> ...] [ <sup>3</sup> ...] 1 BESCHRIFTUNG 2 pagina NAME 3 primul ultim curent precedent urmatorul sus subsol implicit ambele tot first:nochek last:nochek previous:nochek next:nochek top:nochek bottom:nochek
\fetchruntimecommand \ <sup>1</sup> ... { <sup>2</sup> ...} 1 CSNAME 2 FILE
\fetchtwomarkings [ <sup>1</sup> ...] [ <sup>2</sup> ...] 1 BESCHRIFTUNG 2 pagina NAME
\fetchtwomarks [...] * BESCHRIFTUNG
\fieldbody [ <sup>1</sup> ...] [ <sup>2</sup> ... <sub>OPT</sub> ...] 1 NAME 2 inherits: \setupfieldbody
\fifthoffivearguments { <sup>1</sup> ...} { <sup>2</sup> ...} { <sup>3</sup> ...} { <sup>4</sup> ...} { <sup>5</sup> ...} 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT
\fifthofsixarguments { <sup>1</sup> ...} { <sup>2</sup> ...} { <sup>3</sup> ...} { <sup>4</sup> ...} { <sup>5</sup> ...} { <sup>6</sup> ...} 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT
\figuraexterna [ <sup>1</sup> ...] [ <sup>2</sup> ...] [ <sup>3</sup> ... <sub>OPT</sub> ... <sub>OPT</sub> ...] 1 FILE OPT 2 NAME 3 inherits: \setuexternalfigure

<code>\figurefilename</code>
<code>\figurefilepath</code>
<code>\figurefiletype</code>
<code>\figurefullname</code>
<code>\figureheight</code>
<code>\figurenaturalheight</code>
<code>\figurenaturalwidth</code>
<code>\figuresymbol [...]</code> $[...,\overset{2}{=},...]$ 1 FILE NAME OPT 2 inherits: \figuraexterna
<code>\figurewidth</code>
<code>\filename {...}</code> * FILE
<code>\filledhboxb</code> $\overset{1}{...} \{\overset{2}{...}\}$ 1 TEXT OPT 2 CONTENT
<code>\filledhboxc</code> $\overset{1}{...} \{\overset{2}{...}\}$ 1 TEXT OPT 2 CONTENT
<code>\filledhboxg</code> $\overset{1}{...} \{\overset{2}{...}\}$ 1 TEXT OPT 2 CONTENT
<code>\filledhboxk</code> $\overset{1}{...} \{\overset{2}{...}\}$ 1 TEXT OPT 2 CONTENT
<code>\filledhboxm</code> $\overset{1}{...} \{\overset{2}{...}\}$ 1 TEXT OPT 2 CONTENT
<code>\filledhboxr</code> $\overset{1}{...} \{\overset{2}{...}\}$ 1 TEXT OPT 2 CONTENT
<code>\filledhboxy</code> $\overset{1}{...} \{\overset{2}{...}\}$ 1 TEXT OPT 2 CONTENT
<code>\filler [...]</code> * sym simbol rigla latime spatiu NAME
<code>\fillupto [...]</code> $\{\overset{2}{...}\}$ 1 sym simbol rigla latime spatiu NAME 2 TEXT

<pre> \filterfromnext {...} {...} {...} {...} {...} {...} {...} 1  NUMBER 2  NUMBER 3  CONTENT 4  CONTENT 5  CONTENT 6  CONTENT 7  CONTENT </pre>
<pre> \filterfromvalue {...} {...} {...} 1  NAME 2  NUMBER 3  NUMBER </pre>
<pre> \filterpages [...]<sup>1</sup> [...,<sup>2</sup>...] [...,<sup>3</sup>...,...]<sup>OPT</sup> 1  FILE 2  par impar NUMBER NUMBER:NUMBER 3  latime    = DIMENSION    n         = NUMBER    category  = NAME </pre>
<pre> \filterreference {...} *  implicit text titlu numar pagina realpage </pre>
<pre> \findtwopassdata {...} {...} 1  NAME 2  NAME </pre>
<pre> \finishregisterentry [...]<sup>1</sup> [...,<sup>2</sup>...,...]<sup>2</sup> [...,<sup>3</sup>...,...]<sup>OPT</sup> 1  NAME 2  eticheta  = NAME    keys      = TEXT PROCESSOR-&gt;TEXT    entries   = TEXT PROCESSOR-&gt;TEXT    alternativ = TEXT 3  KEY = VALUE </pre>
<pre> \firdepar </pre>
<pre> \firstcharacter </pre>
<pre> \firstcounter [...]<sup>1</sup> [...]<sup>2</sup><sup>OPT</sup> 1  NAME 2  NUMBER </pre>
<pre> \firstcountervalue [...]<sup>*</sup> *  NAME </pre>
<pre> \firstinlist [...,<sup>*</sup>...] *  BEFEHL </pre>
<pre> \firstoffivearguments {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup> {...}<sup>5</sup> 1  TEXT 2  TEXT 3  TEXT 4  TEXT 5  TEXT </pre>
<pre> \firstoffourarguments {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup> 1  TEXT 2  TEXT 3  TEXT 4  TEXT </pre>

\firstofoneargument {...} * TEXT
\firstofoneunexpanded {...} * TEXT
\firstofsixarguments {...} {...} {...} {...} {...} {...} 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT
\firstofthreearguments {...} {...} {...} 1 TEXT 2 TEXT 3 TEXT
\firstofthreeunexpanded {...} {...} {...} 1 TEXT 2 TEXT 3 TEXT
\firstoftwoarguments {...} {...} 1 TEXT 2 TEXT
\firstoftwounexpanded {...} {...} 1 TEXT 2 TEXT
\firstrealpage
\firstrealpagenumber
\firstsubcountervalue [... <sup>1</sup> ...] [... <sup>2</sup> ] 1 NAME 2 NUMMER
\firstsubpagenumber
\firstuserpage
\firstuserpagenumber
\fitfieldframed [... <sup>1</sup> ...] {... <sup>2</sup> } 1 inherits: \seteazainconjunctat 2 CONTENT
\fittopbaselinegrid {...} * CONTENT
\flag {...} * NAME
\floatuserdataparameter {...} * KEY

\flushbox {...} {...} 1 NAME 2 NAME
\flushboxregister ... * CSNAME NUMBER
\flushcollector [...] * NAME
\flushedrightlastline
\flushlayer [...] * NAME
\flushlocalfloats
\flushnextbox
\flushnotes
\flushoutputstream [...] * NAME
\flushshapebox
\flushtextflow {...} * NAME
\flushtokens [...] * NAME
\flushtoks \*... * CSNAME
\folosestebloc [..., <sup>1</sup> ...] [..., <sup>2</sup> ...] [..., <sup>3</sup> ...,...] 1 NAME 2 NAME 3 criteriu = text ABSCHNITT
\folosestedirector [...,*...] * PATH
\folosestedocumentextern [... <sup>1</sup> ] [... <sup>2</sup> ] [... <sup>3</sup> ] 1 NAME 2 FILE 3 TEXT
\folosestefiguraexterna [... <sup>1</sup> ] [... <sup>2</sup> ] [... <sup>3</sup> ] [..., <sup>4</sup> ...,...] 1 NAME 2 FILE 3 NAME 4 inherits: \setupexternalfigure
\folosestemodul [... <sup>1</sup> ] [..., <sup>2</sup> ...] [..., <sup>3</sup> ...,...] 1 m p s x t 2 FILE 3 KEY = VALUE

\folosestemuzicaexterna [...] [...] 1 NAME 2 FILE
\folosestescriptJS [...] [...] 1 FILE 2 NAME
\folosestesimboluri [...] * FILE
\folosesteURL [...] [...] [...] [...] 1 NAME 2 URL 3 FILE 4 TEXT
\folosesteurl [...] [...] [...] [...] 1 NAME 2 URL 3 FILE 4 TEXT
\fontalternative
\fontbody
\fontchar {...} * NAME
\fontcharbyindex {...} * NUMMER
\fontclass
\fontclassname {...} {...} 1 NAME 2 FONT
\fontface
\fontfeaturelist [...] [...] 1 NAME 2 TEXT
\fontsize
\fontstyle
\footnotetext [...] [...] [...] 1 REFERENCE 2 TEXT
\footnotetext [..., ..., ..., ...] * titlu = TEXT semncarte = TEXT lista = TEXT referinta = REFERENCE
\forcecharacterstripping

<code>\forcelocalfloats</code>
<code>\forgeteverypar</code>
<code>\forgetparameters [.<sup>1</sup>.] [...,<sup>2</sup>...]</code> 1 TEXT 2 KEY = VALUE
<code>\forgetparskip</code>
<code>\forgetragged</code>
<code>\formula [...,<sup>1</sup>...] {<sup>2</sup>.}</code> 1 <small>offset</small> <code>impachetat tight centru incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext</code> 2 CONTENT
<code>\foundbox {<sup>1</sup>.} {<sup>2</sup>.}</code> 1 NAME 2 NAME
<code>\fourthoffivearguments {<sup>1</sup>.} {<sup>2</sup>.} {<sup>3</sup>.} {<sup>4</sup>.} {<sup>5</sup>.}</code> 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT
<code>\fourthoffourarguments {<sup>1</sup>.} {<sup>2</sup>.} {<sup>3</sup>.} {<sup>4</sup>.}</code> 1 TEXT 2 TEXT 3 TEXT 4 TEXT
<code>\fourthofsixarguments {<sup>1</sup>.} {<sup>2</sup>.} {<sup>3</sup>.} {<sup>4</sup>.} {<sup>5</sup>.} {<sup>6</sup>.}</code> 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT
<code>\FRACTION {<sup>1</sup>.} {<sup>2</sup>.}</code> 1 CONTENT 2 CONTENT instances: <code>xfrac xxfrac frac sfrac dfrac binom dbinom tbinom</code>
<code>\binom {<sup>1</sup>.} {<sup>2</sup>.}</code> 1 CONTENT 2 CONTENT
<code>\dbinom {<sup>1</sup>.} {<sup>2</sup>.}</code> 1 CONTENT 2 CONTENT
<code>\dfrac {<sup>1</sup>.} {<sup>2</sup>.}</code> 1 CONTENT 2 CONTENT
<code>\frac {<sup>1</sup>.} {<sup>2</sup>.}</code> 1 CONTENT 2 CONTENT



$\backslash sfrac \{...\} \{...\}$ 1    CONTENT 2    CONTENT
$\backslash tbinom \{...\} \{...\}$ 1    CONTENT 2    CONTENT
$\backslash xfrac \{...\} \{...\}$ 1    CONTENT 2    CONTENT
$\backslash xxfrac \{...\} \{...\}$ 1    CONTENT 2    CONTENT
$\backslash framed \left[ \dots \stackrel{1}{=} \dots \right] \{...\}$ 1    inherits: $\backslash setezainconjurat$ 2    CONTENT
$\backslash frameddimension \{...\}$ *    KEY
$\backslash framedparameter \{...\}$ *    KEY
$\backslash FRAMED \left[ \dots \stackrel{1}{=} \dots \right] \{...\}$ 1    inherits: $\backslash setezainconjurat$ 2    CONTENT instances: <code>unframed fitfieldframed</code>
$\backslash fitfieldframed \left[ \dots \stackrel{1}{=} \dots \right] \{...\}$ 1    inherits: $\backslash setezainconjurat$ 2    CONTENT
$\backslash unframed \left[ \dots \stackrel{1}{=} \dots \right] \{...\}$ 1    inherits: $\backslash setezainconjurat$ 2    CONTENT
$\backslash freezedimenmacro \stackrel{1}{\dots} \stackrel{2}{\dots}$ 1    CSNAME 2    CSNAME
$\backslash freezemeasure \stackrel{1}{[...]} \stackrel{2}{[...]}$ 1    NAME 2    DIMENSION
$\backslash frenchspacing$
$\backslash fromlinenote \stackrel{1}{[...]} \stackrel{2}{\{...\}}$ 1    REFERENCE 2    TEXT
$\backslash frozenhbox \{...\}$ *    CONTENT
$\backslash frule \dots \stackrel{*}{\dots} \dots \backslash relax$ *    width <sub>1</sub> DIMENSION height <sub>1</sub> DIMENSION depth <sub>1</sub> DIMENSION radius <sub>1</sub> DIMENSION line <sub>1</sub> DIMENSION type <sub>1</sub> TEXT data <sub>1</sub> TEXT name <sub>1</sub> TEXT

\fundal {...} *   CONTENT
\FUNDAL {...} *   CONTENT instances: fundal
\GetPar
\GotoPar
\Greeknumerals {...} *   NUMMER
\gdefconvertedargument \ <sup>1</sup> ... {\ <sup>2</sup> ...} 1   CSNAME 2   TEXT
\gdefconvertedcommand \ <sup>1</sup> ... \ <sup>2</sup> .. 1   CSNAME 2   CSNAME
\getboxfromcache {\ <sup>1</sup> ...} {\ <sup>2</sup> ...} \ <sup>3</sup> .. 1   NAME 2   NUMMER TEXT 3   CSNAME NUMMER
\getboxllx ... *   CSNAME NUMMER
\getboxlly ... *   CSNAME NUMMER
\getbufferdata [...] *   BUFFER                   OPT
\getcommacommandsize [...,*,...] *   BEFEHL
\getcommalistsize [...,*,...] *   BEFEHL
\getdayoftheweek {\ <sup>1</sup> ...} {\ <sup>2</sup> ...} {\ <sup>3</sup> ...} 1   NUMMER 2   NUMMER 3   NUMMER
\getdayspermonth {\ <sup>1</sup> ...} {\ <sup>2</sup> ...} 1   NUMMER 2   NUMMER
\getdefinedbuffer [...] *   BUFFER
\getdocumentargument {...} *   NAME

<code>\getdocumentargumentdefault {...} {...}</code> 1 NAME 2 TEXT
<code>\getdocumentfilename {...}</code> * NUMMER
<code>\getdummyparameters [...,..<sup>2</sup>...,...]</code> * KEY = VALUE
<code>\getemptyparameters [...] [...,..<sup>2</sup>...,...]</code> 1 TEXT 2 KEY = VALUE
<code>\getparameters [...] [...,..<sup>2</sup>...,...]</code> 1 TEXT 2 KEY = VALUE
<code>\getexpandedparameters [...] [...,..<sup>2</sup>...,...]</code> 1 TEXT 2 KEY = VALUE
<code>\getfiguredimensions [...] [...,..<sup>2</sup>...,...]</code> 1 FILE 2 inherits: \setupexternalfigure
<code>\getfirstcharacter {...}</code> * TEXT
<code>\getfirsttwopassdata {...}</code> * NAME
<code>\getfromcommacommand [...,<sup>1</sup>...] [...<sup>2</sup>]</code> 1 BEFEHL 2 NUMMER
<code>\getfromcommalist [...,<sup>1</sup>...] [...<sup>2</sup>]</code> 1 BEFEHL 2 NUMMER
<code>\getfromtwopassdata {...} {...}</code> 1 NAME 2 NAME
<code>\getglyphdirect {...} {...}</code> 1 FONT 2 NUMMER CHARACTER
<code>\getglyphstyled {...} {...}</code> 1 FONT 2 NUMMER CHARACTER
<code>\getgparameters [...] [...,..<sup>2</sup>...,...]</code> 1 TEXT 2 KEY = VALUE
<code>\getinlineuserdata</code>
<code>\getlasttwopassdata {...}</code> * NAME

\getlocalfloat {...} *   NUMBER
\getlocalfloats
\getMPdrawing
\getMPlayer [ <sup>1</sup> ...] [ <sup>2</sup> ... <sub>OPT</sub> ...] {...} 1   NAME 2   inherits: \seteazainconjurat 3   CONTENT
\getmessage { <sup>1</sup> ...} { <sup>2</sup> ...} 1   NAME 2   NAME NUMBER
\getnamedglyphdirect { <sup>1</sup> ...} { <sup>2</sup> ...} 1   FONT 2   NAME
\getnamedglyphstyled { <sup>1</sup> ...} { <sup>2</sup> ...} 1   FONT 2   NAME
\getnamedtwopassdatalist \ <sup>1</sup> ... { <sup>2</sup> ...} 1   CSNAME 2   NAME
\getnaturaldimensions ... *   CSNAME NUMBER
\getnoflines {...} *   DIMENSION
\getobject { <sup>1</sup> ...} { <sup>2</sup> ...} 1   NAME 2   NAME
\getobjectdimensions { <sup>1</sup> ...} { <sup>2</sup> ...} 1   NAME 2   NAME
\getpaletsize [...] *   NAME
\getparameters [ <sup>1</sup> ...] [ <sup>2</sup> ... <sub>...</sub> ...] 1   TEXT 2   KEY = VALUE
\getprivatechar {...} *   NAME
\getprivateslot {...} *   NAME
\getrandomcount \ <sup>1</sup> ... { <sup>2</sup> ...} { <sup>3</sup> ...} 1   CSNAME 2   NUMBER 3   NUMBER

\getrandomdimen \ <sup>1</sup> ... {\ <sup>2</sup> ...} {\ <sup>3</sup> ...} 1 CSNAME 2 DIMENSION 3 DIMENSION
\getrandomfloat \ <sup>1</sup> ... {\ <sup>2</sup> ...} {\ <sup>3</sup> ...} 1 CSNAME 2 NUMMER 3 NUMMER
\getrandomnumber \ <sup>1</sup> ... {\ <sup>2</sup> ...} {\ <sup>3</sup> ...} 1 CSNAME 2 NUMMER 3 NUMMER
\getrandomseed \*.. * CSNAME
\getraweparameters [ <sup>1</sup> ...] [..., <sup>2</sup> ...] 1 TEXT 2 KEY = VALUE
\getrawgparameters [ <sup>1</sup> ...] [..., <sup>2</sup> ...] 1 TEXT 2 KEY = VALUE
\getrawnoflines {\*.. * DIMENSION
\getrawparameters [ <sup>1</sup> ...] [..., <sup>2</sup> ...] 1 TEXT 2 KEY = VALUE
\getrawxparameters [ <sup>1</sup> ...] [..., <sup>2</sup> ...] 1 TEXT 2 KEY = VALUE
\getreference [ <sup>1</sup> ...] [ <sup>2</sup> .. 1 implicit text titlu numar pagina realpage 2 REFERENCE
\getreferenceentry {\*.. * implicit text titlu numar pagina realpage
\getroundednoflines {\*.. * DIMENSION
\getsubstring {\ <sup>1</sup> ...} {\ <sup>2</sup> ...} {\ <sup>3</sup> ...} 1 NUMMER 2 NUMMER 3 TEXT
\gettokenlist [...] * NAME
\gettwopassdata {\*.. * NAME
\gettwopassdatalist {\*.. * NAME

<code>\getuserdata</code>
<code>\getuvalue {...}</code> *    NAME
<code>\getvalue {...}</code> *    NAME
<code>\getvariable {...} {...}</code> 1    NAME 2    KEY
<code>\getvariabledefault {...} {...} {...}</code> 1    NAME 2    KEY 3    BEFEHL
<code>\getxparameters [...] [...,...<sup>2</sup>...,...]</code> 1    TEXT 2    KEY = VALUE
<code>\globaldisablemode [...,*,...]</code> *    NAME
<code>\globalenablemode [...,*,...]</code> *    NAME
<code>\globalletempty \...</code> *    CSNAME
<code>\globalpopbox ...</code> *    CSNAME NUMBER
<code>\globalpopmacro \...</code> *    CSNAME
<code>\globalpreventmode [...,*,...]</code> *    NAME
<code>\globalprocesscommalist [...] \...</code> 1    BEFEHL 2    CSNAME
<code>\globalpushbox ...</code> *    CSNAME NUMBER
<code>\globalpushmacro \...</code> *    CSNAME
<code>\globalpushreferenceprefix {...} ... \globalpopreferenceprefix</code> *    + - TEXT
<code>\globalswapcounts \... \...</code> 1    CSNAME 2    CSNAME
<code>\globalswapdimens \... \...</code> 1    CSNAME 2    CSNAME

`\globalswapmacros \1... \2...`

1 CSNAME  
2 CSNAME

`\globalundefine {...}`

\* NAME

`\glyphfontfile {...}`

\* FONT

`\gobbledoubleempty [1...] [2...]`

1 TEXT  
2 TEXT

`\gobbleeightarguments {...} {...} {...} {...} {...} {...} {...} {...}`

1 CONTENT  
2 CONTENT  
3 CONTENT  
4 CONTENT  
5 CONTENT  
6 CONTENT  
7 CONTENT  
8 CONTENT

`\gobblefivearguments {...} {...} {...} {...} {...}`

1 CONTENT  
2 CONTENT  
3 CONTENT  
4 CONTENT  
5 CONTENT

`\gobblefiveoptionals [1...] [2...] [3...] [4...] [5...]`

1 TEXT  
2 TEXT  
3 TEXT  
4 TEXT  
5 TEXT

`\gobblefourarguments {...} {...} {...} {...}`

1 CONTENT  
2 CONTENT  
3 CONTENT  
4 CONTENT

`\gobblefouroptionals [1...] [2...] [3...] [4...]`

1 TEXT  
2 TEXT  
3 TEXT  
4 TEXT

`\gobbleninearguments {...} {...} {...} {...} {...} {...} {...} {...} {...}`

1 CONTENT  
2 CONTENT  
3 CONTENT  
4 CONTENT  
5 CONTENT  
6 CONTENT  
7 CONTENT  
8 CONTENT  
9 CONTENT

`\gobbleoneargument {...}`

\* CONTENT

`\gobbleoneoptional [...]`

\* TEXT

1	CONTENT
2	CONTENT
3	CONTENT
4	CONTENT
5	CONTENT
6	CONTENT
7	CONTENT

* TEXT	OPT
1. The first part of the report is devoted to a general overview of the current state of the art in the field of artificial intelligence.	
2. In the second part, we will discuss the various applications of artificial intelligence in the field of medicine.	
3. The third part of the report will focus on the ethical implications of the use of artificial intelligence in the workplace.	
4. Finally, the fourth part will discuss the future prospects of artificial intelligence and the challenges that lie ahead.	

1	CONTENT
2	CONTENT
3	CONTENT
4	CONTENT
5	CONTENT
6	CONTENT

1	CONTENT
2	CONTENT
3	CONTENT
4	CONTENT
5	CONTENT
6	CONTENT
7	CONTENT
8	CONTENT
9	CONTENT
10	CONTENT

1 CONTENT  
2 CONTENT  
3 CONTENT

```

1  TEXT
2  TEXT
3  TEXT

```

1 CONTENT  
2 CONTENT

1 TEXT  
2 TEXT

\* CSNAME

\* CONTENT

1	CATEGORY	OPT
2	NAME	
3	NAME	
4	NAME	



<code>\grabbufferdatadirect {...} {...} {...}</code> 1 NAME 2 NAME 3 NAME
<code>\grabuntil {...} \^2..</code> 1 NAME 2 CSNAME
<code>\grave {...}</code> * CHARACTER
<code>\grayvalue {...}</code> * COLOR
<code>\greedystring ... \at \^2.. \to \^3.. \and \^4..</code> 1 TEXT 2 TEXT 3 CSNAME 4 CSNAME
<code>\greeknumerals {...}</code> * NUMMER
<code>\grid [..., ...=..., ...]</code> * inherits: \basegrid <sup>OPT</sup>
<code>\grosimelinie</code>
<code>\groupedcommand {...} {...}</code> 1 BEFEHL 2 BEFEHL
<code>\gsetboxllx \^1. {...}</code> 1 CSNAME NUMBER 2 DIMENSION
<code>\gsetboxlly \^1. {...}</code> 1 CSNAME NUMBER 2 DIMENSION
<code>\gujaratinumerals {...}</code> * NUMMER
<code>\gurmukhinumerals {...}</code> * NUMMER
<code>\hairspace</code>
<code>\halflinestrut</code>
<code>\halfstrut</code>
<code>\halfwaybox {...}</code> * CONTENT
<code>\handletokens \^1. \with \^2..</code> 1 TEXT 2 CSNAME

<code>\hash</code>
<code>\hat {...}</code> * CHARACTER
<code>\hboxofvbox ...</code> * CSNAME NUMBER
<code>\hboxreference [...<sup>1</sup>,...] {...<sup>2</sup>}</code> 1 REFERENCE 2 CONTENT
<code>\hboxBOX {...}</code> * CONTENT
<code>\hdofstring {...}</code> * TEXT
<code>\headhbox ...<sup>1</sup> {...<sup>2</sup>}</code> 1 TEXT OPT 2 CONTENT
<code>\headnumbercontent</code>
<code>\headnumberdistance</code>
<code>\headnumberwidth</code>
<code>\headreferenceattributes</code>
<code>\headsetupspacing</code>
<code>\headtextcontent</code>
<code>\headtextdistance</code>
<code>\headtextwidth</code>
<code>\headvbox ...<sup>1</sup> {...<sup>2</sup>}</code> 1 TEXT OPT 2 CONTENT
<code>\headwidth</code>
<code>\heightanddepthofstring {...}</code> * TEXT
<code>\heightofstring {...}</code> * TEXT
<code>\heightspanningtext {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>}</code> 1 TEXT 2 DIMENSION 3 FONT

$\backslash$ HELP [...] {...} {...} 1 REFERENCE 2 TEXT 3 TEXT instances: helptext
$\backslash$ helptext [...] {...} {...} 1 REFERENCE OPT 2 TEXT 3 TEXT
$\backslash$ hglue ... * DIMENSION
$\backslash$ hiddencitation [...]
$\backslash$ hiddencite [...]
$\backslash$ highlight [...] {...} 1 NAME 2 TEXT
$\backslash$ HIGHLIGHT {...} * TEXT
$\backslash$ highordinalstr {...} * TEXT
$\backslash$ hilo [...] {...} {...} 1 stanga <sup>OR</sup> dreapta 2 CONTENT 3 CONTENT
$\backslash$ himilo {...} {...} {...} 1 CONTENT 2 CONTENT 3 CONTENT
$\backslash$ hl [...]
$\backslash$ horizontalgrowingbar [...,.*=,...]
$\backslash$ horizontalpositionbar [...,.*=,...]
$\backslash$ hphantom {...} * CONTENT
$\backslash$ hpos [...] {...} {...} 1 NAME 2 CONTENT
$\backslash$ hsizedfraction [...] {...} {...} 1 DIMENSION 2 NUMMER

<code>\hsmash {...}</code> *    CONTENT
<code>\hsmashbox ...</code> *    CSNAME NUMBER
<code>\hsmashed {...}</code> *    CONTENT
<code>\hspace [...<sup>1</sup>] [...<sup>2</sup>]</code> 1    NAME        OPT        OPT 2    mic mediu mare normal implicit niciunul .5 1 2 3 speech minicitat interquotation citat sentence intersentence final NAME
<code>\htdpofstring {...}</code> *    TEXT
<code>\htofstring {...}</code> *    TEXT
<code>\hyphen</code>
<code>\hyphenatedcoloredword {...}</code> *    TEXT
<code>\hyphenatedfile {...}</code> *    FILE
<code>\hyphenatedfilename {...}</code> *    TEXT
<code>\hyphenatedhbox {...}</code> *    CONTENT
<code>\hyphenatedpar {...}</code> *    TEXT
<code>\hyphenatedurl {...}</code> *    TEXT
<code>\hyphenatedword {...}</code> *    TEXT
<code>\INRSTEX</code>
<code>\ibox {...}</code> *    CONTENT
<code>\ifassignment ... \else ... \fi</code> 1    TRUE 2    FALSE
<code>\iff</code>
<code>\ifinobject ... \else ... \fi</code> 1    TRUE 2    FALSE

<code>\ifinputstream .<sup>1</sup>. \else .<sup>2</sup>. \fi</code> 1 TRUE 2 FALSE
<code>\ifparameters .<sup>1</sup>. \else .<sup>2</sup>. \fi</code> 1 TRUE 2 FALSE
<code>\iftrialeasetting .<sup>1</sup>. \else .<sup>2</sup>. \fi</code> 1 TRUE 2 FALSE
<code>\ignoreimplicitspaces</code>
<code>\ignoretagsinexport [...,*,...]</code> * NAME
<code>\ignorevalue {...}</code> * NAME
<code>\immediatesavetwopassdata {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>}</code> 1 NAME 2 NUMBER 3 CONTENT
<code>\impartefloat [...,<sup>1</sup>...,...] {...<sup>2</sup>} {...<sup>3</sup>}</code> 1 inherits: \seteazaimpartefloat 2 BEFEHL 3 CONTENT
<code>\impliedby</code>
<code>\implies</code>
<code>\in {...<sup>1</sup>} {...<sup>2</sup>} [...<sup>3</sup>]</code> 1 TEXT <sup>OPT</sup> 2 TEXT 3 REFERENCE
<code>\inalt {...}</code> * CONTENT
<code>\HIGH {...}</code> * CONTENT instances: unitshigh
<code>\unitshigh {...}</code> * CONTENT
<code>\inclinat</code>
<code>\inclinataldin</code>
<code>\includemenu [...]</code> * NAME
<code>\includeversioninfo {...}</code> * NAME

$\backslash\text{increment}$ $\backslash^{*}$ $*$ CSNAME
$\backslash\text{incrementcounter}$ [ $\backslash^{1}$ ] [ $\backslash^{2}$ ] 1 NAME OPT 2 NUMBER
$\backslash\text{incrementedcounter}$ [ $\backslash^{*}$ ] $*$ NAME
$\backslash\text{incrementpagenumber}$
$\backslash\text{incrementsubpagenumber}$
$\backslash\text{incrementvalue}$ $\{\backslash^{*}\}$ $*$ NAME
$\backslash\text{increment}$ ( $\backslash^{*}$ , $\backslash^{*}$ ) $*$ CSNAME NUMBER
$\backslash\text{indentation}$
$\backslash\text{infofont}$
$\backslash\text{infofontbold}$
$\backslash\text{inframed}$ [ $\backslash^{*}$ , $\backslash^{*}$ , $\backslash^{*}$ ] [ $\backslash^{*}$ ] 1 inherits: $\backslash\text{setea}\frac{2}{3}\text{inconjurat}$ 2 CONTENT
$\backslash\text{inheritparameter}$ [ $\backslash^{1}$ ] [ $\backslash^{2}$ ] [ $\backslash^{3}$ ] 1 TEXT 2 TEXT 3 KEY
$\backslash\text{inhibitblank}$
$\backslash\text{initializeboxstack}$ $\{\backslash^{*}\}$ $*$ NAME
$\backslash\text{injos}$ [ $\backslash^{*}$ ] $*$ DIMENSION
$\backslash\text{inlinebuffer}$ [ $\backslash^{*}$ , $\backslash^{*}$ ] $*$ BUFFER OPT
$\backslash\text{inlinedbox}$ $\{\backslash^{*}\}$ $*$ CONTENT
$\backslash\text{inlinemath}$ $\{\backslash^{*}\}$ $*$ CONTENT
$\backslash\text{inlinemathematics}$ $\{\backslash^{*}\}$ $*$ CONTENT
$\backslash\text{inlinemessage}$ $\{\backslash^{*}\}$ $*$ TEXT

$\backslash inlineordisplaymath \{.^1.\} \{.^2.\}$ 1    CONTENT 2    CONTENT
$\backslash inlineprettyprintbuffer \{.^1.\} \{.^2.\}$ 1    BUFFER 2    mp lua xml parsed-xml nested tex context niciunul NAME
$\backslash inlinerange [...]$ *    REFERENCE
$\backslash inline \{.^1.\} [.^2.]$ 1    TEXT            OPT 2    REFERENCE
$\backslash innerflushshapebox$
$\backslash input \{.^*\}$ *    FILE
$\backslash inputfilebarename$
$\backslash inputfilename$
$\backslash inputfilerealsuffix$
$\backslash inputfilesuffix$
$\backslash inputgivenfile \{.^*\}$ *    FILE
$\backslash input ...$ *    FILE
$\backslash insertpages [.^1.] [...,.^2,...] [...,.^3,...]$ 1    FILE                    OPT                    OPT 2    NUMBER 3    latime    =    DIMENSION n            =    NUMMER category    =    NAME
$\backslash instalarelimba [.^1.] [...,.^2,...]$ 1    NAME 2    inherits: \setarelimba
$\backslash instalarelimba [.^1.] [.^2.]$ 1    NAME 2    SPRACHE
$\backslash installactionhandler \{.^*\}$ *    NAME
$\backslash installactivecharacter ...$ *    CHARACTER
$\backslash installanddefineactivecharacter .^1. \{.^2.\}$ 1    CHARACTER 2    BEFEHL

<pre> \installattributestack \*.. *   CSNAME </pre>
<pre> \installautocommandhandler \.^1.. {...} \.^3.. 1   CSNAME 2   NAME 3   CSNAME </pre>
<pre> \installautosetuphandler \.^1.. {...} 1   CSNAME 2   NAME </pre>
<pre> \installbasicautosetuphandler \.^1.. {...} \.^3.. 1   CSNAME 2   NAME 3   CSNAME </pre>
<pre> \installbasicparameterhandler \.^1.. {...} 1   CSNAME 2   NAME </pre>
<pre> \installbottomframerenderer {...} {...} 1   NAME 2   BEFEHL </pre>
<pre> \installcommandhandler \.^1.. {...} \.^3.. 1   CSNAME 2   NAME 3   CSNAME </pre>
<pre> \installcorenamespace {...} *   NAME </pre>
<pre> \installdefinehandler \.^1.. {...} \.^3.. 1   CSNAME 2   NAME 3   CSNAME </pre>
<pre> \installdefinitionset \.^1.. {...} 1   CSNAME 2   NAME </pre>
<pre> \installdefinitionsetmember \.^1.. {...} \.^3.. {...} 1   CSNAME 2   NAME 3   CSNAME 4   NAME </pre>
<pre> \installdirectcommandhandler \.^1.. {...} 1   CSNAME 2   NAME </pre>
<pre> \installdirectparameterhandler \.^1.. {...} 1   CSNAME 2   NAME </pre>
<pre> \installdirectparametersethandler \.^1.. {...} 1   CSNAME 2   NAME </pre>
<pre> \installdirectsetuphandler \.^1.. {...} 1   CSNAME 2   NAME </pre>



\installdirectstyleandcolorhandler \... {...} 1 CSNAME 2 NAME
\installframedautocommandhandler \... {...} \... 1 CSNAME 2 NAME 3 CSNAME
\installframedcommandhandler \... {...} \... 1 CSNAME 2 NAME 3 CSNAME
\installglobalmacrostack \*... * CSNAME
\installleftframerenderer {...} {...} 1 NAME 2 BEFEHL
\installmacrostack \*... * CSNAME
\installnamespace {...} * NAME
\installoutputroutine \... {...} 1 CSNAME 2 BEFEHL
\installpagearrangement ... {...} 1 NAME 2 BEFEHL
\installparameterhandler \... {...} 1 CSNAME 2 NAME
\installparameterhashhandler \... {...} 1 CSNAME 2 NAME
\installparametersethandler \... {...} 1 CSNAME 2 NAME
\installparentinjector \... {...} 1 CSNAME 2 NAME
\installrightframerenderer {...} {...} 1 NAME 2 BEFEHL
\installrootparameterhandler \... {...} 1 CSNAME 2 NAME

<pre> \installsetuphandler \.^ {..} 1 CSNAME 2 NAME </pre>
<pre> \installsetuponlycommandhandler \.^ {..} 1 CSNAME 2 NAME </pre>
<pre> \installshipoutmethod {..} {..} 1 NAME 2 BEFEHL </pre>
<pre> \installsimplecommandhandler \.^ {..} \.^ 1 CSNAME 2 NAME 3 CSNAME </pre>
<pre> \installsimpleframedcommandhandler \.^ {..} \.^ 1 CSNAME 2 NAME 3 CSNAME </pre>
<pre> \installstyleandcolorhandler \.^ {..} 1 CSNAME 2 NAME </pre>
<pre> \installswitchcommandhandler \.^ {..} \.^ 1 CSNAME 2 NAME 3 CSNAME </pre>
<pre> \installswitchsetuphandler \.^ {..} 1 CSNAME 2 NAME </pre>
<pre> \installtexdirective {..} {..} {..} 1 NAME 2 BEFEHL 3 BEFEHL </pre>
<pre> \installtextracker {..} {..} {..} 1 NAME 2 BEFEHL 3 BEFEHL </pre>
<pre> \installtopframerenderer {..} {..} 1 NAME 2 BEFEHL </pre>
<pre> \installunitsseparator {..} {..} 1 NAME 2 BEFEHL </pre>
<pre> \installunitsspace {..} {..} 1 NAME 2 BEFEHL </pre>
<pre> \installversioninfo {..} {..} 1 NAME 2 BEFEHL </pre>
<pre> \integerrounding {.*} * NUMMER </pre>

<code>\intertext {...}</code> * TEXT
<code>\intins [...,<sup>1</sup>...,<sup>2</sup>...] {...}</code> 1 inherits: \setupstretched 2 TEXT
<code>\invokepagehandler {...} {...}</code> 1 normal niciunul NAME 2 CONTENT
<code>\istltdir ...</code> * TLT TRT
<code>\istrtdir ...</code> * TLT TRT
<code>\italic</code>
<code>\italicaldin</code>
<code>\italiccorrection</code>
<code>\italicface</code>
<code>\itemtag [...,*,...]</code> * REFERENCE <small>OPT</small>
<code>\jobfilename</code>
<code>\jobfilesuffix</code>
<code>\jos {...}</code> * CONTENT
<code>\jossus [...<sup>1</sup>] {...<sup>2</sup>} {...<sup>3</sup>}</code> 1 stanga dreapta 2 CONTENT 3 CONTENT
<code>\LOW {...}</code> * CONTENT instances: unitslow
<code>\unitslow {...}</code> * CONTENT
<code>\Kap {...}</code> * TEXT
<code>\kap {...}</code> * TEXT
<code>\keeplinestogether {...}</code> * NUMMER
<code>\keepunwantedspaces</code>

$\backslash\text{kerncharacters}$ [ <sup>1</sup> ...] { <sup>2</sup> ...} 1    NUMBER                    OPT 2    TEXT
$\backslash\text{koreancircenumerals}$ {...} *    NUMBER
$\backslash\text{koreannumerals}$ {...} *    NUMBER
$\backslash\text{koreannumeralsc}$ {...} *    NUMBER
$\backslash\text{koreannumeralsp}$ {...} *    NUMBER
$\backslash\text{koreanparentnumerals}$ {...} *    NUMBER
$\backslash\text{LAMSTEX}$
$\backslash\text{LATEX}$
$\backslash\text{LamSTeX}$
$\backslash\text{LaTeX}$
$\backslash\text{Litera}$ {...} *    NUMBER
$\backslash\text{Litere}$ {...} *    NUMBER
$\backslash\text{LUAJITTEX}$
$\backslash\text{LUATEX}$
$\backslash\text{LUNA}$ {...} *    NUMBER
$\backslash\text{Lua}$
$\backslash\text{LuajitTeX}$
$\backslash\text{LuaTeX}$
$\backslash\text{la}$ { <sup>1</sup> ...} { <sup>2</sup> ...} [ <sup>3</sup> ...] 1    TEXT <sup>OPT</sup> OPT 2    TEXT 3    REFERENCE
$\backslash\text{LABELlimba}$ instances: head label mathlabel taglabel unit operator prefix suffix btxlabel
$\backslash\text{btxlabellimba}$

<code>\headlimba</code>
<code>\labellimba</code>
<code>\mathlabellimba</code>
<code>\operatorlimba</code>
<code>\prefixlimba</code>
<code>\suffixlimba</code>
<code>\taglabellimba</code>
<code>\unitlimba</code>
<code>\LABELtexts {...} {...}</code> 1 KEY 2 TEXT <b>instances:</b> head label mathlabel
<code>\headtexts {...} {...}</code> 1 KEY 2 TEXT
<code>\labeltexts {...} {...}</code> 1 KEY 2 TEXT
<code>\mathlabeltexts {...} {...}</code> 1 KEY 2 TEXT
<code>\languageCharacters {...}</code> * NUMMER
<code>\languagecharacters {...}</code> * NUMMER
<code>\languagecharwidth {...}</code> * SPRACHE
<code>\lapagina [...]</code> * REFERENCE
<code>\lastcounter [...] [...]</code> 1 NAME <small>OPT</small> 2 NUMMER
<code>\lastcountervalue [...]</code> * NAME
<code>\lastdigit {...}</code> * NUMMER
<code>\lastlinewidth</code>

<code>\lastnaturalboxdp</code>
<code>\lastnaturalboxht</code>
<code>\lastnaturalboxwd</code>
<code>\lastpredefinedsymbol</code>
<code>\lastrealpage</code>
<code>\lastrealpagenumber</code>
<code>\lastsubcountervalue [.<sup>1</sup>.] [.<sup>2</sup>.]</code> 1 NAME 2 NUMMER
<code>\lastsubpagenumber</code>
<code>\lasttwodigits {.*}</code> * NUMMER
<code>\lastuserpage</code>
<code>\lastuserpagenumber</code>
<code>\lateluacode {.*}</code> * BEFEHL
<code>\layeredtext [...<sup>1</sup>...<sup>2</sup>...] [...<sup>2</sup>...<sup>3</sup>...] {.<sup>3</sup>.} {.<sup>4</sup>.}</code> 1 inherits: \setuplayer <sup>OPT</sup> 2 inherits: \setuplayeredtext 3 TEXT 4 CONTENT
<code>\layerheight</code>
<code>\layerwidth</code>
<code>\lazysavetaggedtwopassdata {.<sup>1</sup>.} {.<sup>2</sup>.} {.<sup>3</sup>.} {.<sup>4</sup>.}</code> 1 NAME 2 NUMMER 3 NAME 4 CONTENT
<code>\lazysavetwopassdata {.<sup>1</sup>.} {.<sup>2</sup>.} {.<sup>3</sup>.}</code> 1 NAME 2 NUMMER 3 CONTENT
<code>\lbox .<sup>1</sup>... {.<sup>2</sup>.}</code> 1 TEXT <sup>OPT</sup> 2 CONTENT
<code>\leftbottombox {.*}</code> * CONTENT
<code>\leftbox {.*}</code> * CONTENT

$\backslash\text{lefthbox}$ {...} *    CONTENT
$\backslash\text{leftLABELtext}$ {...} *    KEY instances: head label mathlabel
$\backslash\text{leftheadtext}$ {...} *    KEY
$\backslash\text{leftlabeltext}$ {...} *    KEY
$\backslash\text{leftmathlabeltext}$ {...} *    KEY
$\backslash\text{leftline}$ {...} *    CONTENT
$\backslash\text{lefttorrighthbox}$ ... <sup>1</sup> {...} <sup>2</sup> 1    TEXT                    OPT 2    CONTENT
$\backslash\text{lefttorrightvbox}$ ... <sup>1</sup> {...} <sup>2</sup> 1    TEXT                    OPT 2    CONTENT
$\backslash\text{lefttorrightvtop}$ ... <sup>1</sup> {...} <sup>2</sup> 1    TEXT                    OPT 2    CONTENT
$\backslash\text{leftskipadaption}$
$\backslash\text{leftsubguillemot}$
$\backslash\text{lefttopbox}$ {...} *    CONTENT
$\backslash\text{lefttright}$
$\backslash\text{lefttorrighthbox}$ ... <sup>1</sup> {...} <sup>2</sup> 1    TEXT                    OPT 2    CONTENT
$\backslash\text{lefttorrightvbox}$ ... <sup>1</sup> {...} <sup>2</sup> 1    TEXT                    OPT 2    CONTENT
$\backslash\text{lefttorrightvtop}$ ... <sup>1</sup> {...} <sup>2</sup> 1    TEXT                    OPT 2    CONTENT
$\backslash\text{letbeundefined}$ {...} *    NAME
$\backslash\text{letcatcodecommand}$ \... <sup>1</sup> ... <sup>2</sup> \... <sup>3</sup> 1    CSNAME 2    CHARACTER NUMBER 3    CSNAME

$\backslash\text{letcscsname} \backslash^{1..} \backslash\text{csname} \dots \backslash\text{endcscsname}$ 1 CSNAME 2 NAME
$\backslash\text{letcsnamecs} \backslash\text{csname} \dots \backslash\text{endcsname} \backslash^{2..}$ 1 NAME 2 CSNAME
$\backslash\text{letcsnamecsname} \backslash\text{csname} \dots \backslash\text{endcsname} \backslash\text{csname} \dots \backslash\text{endcsname}$ 1 NAME 2 NAME
$\backslash\text{letdummyparameter} \{\dots\} \backslash^{2..}$ 1 KEY 2 CSNAME
$\backslash\text{letempty} \backslash^{*..}$ * CSNAME
$\backslash\text{letgvalue} \{\dots\} \backslash^{2..}$ 1 NAME 2 CSNAME
$\backslash\text{letgvalueempty} \{\dots\}$ * NAME
$\backslash\text{letgvalurelax} \{\dots\}$ * NAME
$\backslash\text{letterampersand}$
$\backslash\text{letterat}$
$\backslash\text{letterbackslash}$
$\backslash\text{letterbar}$
$\backslash\text{letterbgroup}$
$\backslash\text{letterclosebrace}$
$\backslash\text{lettercolon}$
$\backslash\text{letterdollar}$
$\backslash\text{letterdoublequote}$
$\backslash\text{letterereggroup}$
$\backslash\text{letterescape}$
$\backslash\text{letterexclamationmark}$
$\backslash\text{letterhash}$
$\backslash\text{letterhat}$



<code>\letterleftbrace</code>
<code>\letterleftbracket</code>
<code>\letterleftparenthesis</code>
<code>\letterless</code>
<code>\lettermore</code>
<code>\letteropenbrace</code>
<code>\letterpercent</code>
<code>\letterquestionmark</code>
<code>\letterrightbrace</code>
<code>\letterrightbracket</code>
<code>\letterrightparenthesis</code>
<code>\lettersinglequote</code>
<code>\letterslash</code>
<code>\letterspacing</code> [ <sup>1</sup> ...] { <sup>2</sup> ...} 1    NUMBER                    OPT 2    TEXT
<code>\lettertilde</code>
<code>\letterunderscore</code>
<code>\letvalue</code> { <sup>1</sup> ...} \ <sup>2</sup> .. 1    NAME 2    CSNAME
<code>\letvalueempty</code> {.*} *    NAME
<code>\letvaluerelax</code> {.*} *    NAME
<code>\lfence</code> {.*} *    CHARACTER
<code>\lhbox</code> {.*} *    CONTENT
<code>\limba</code> [...] *    SPRACHE
<code>\limbapincipala</code> [...] *    SPRACHE

<code>\LANGUAGE</code>
<code>\limitatefirstline {...} {...} {...}</code> 1 TEXT 2 DIMENSION 3 BEFEHL
<code>\limitatelines {...} {...} {...}</code> 1 NUMMER 2 BEFEHL 3 TEXT
<code>\limitatetext {...} {...} {...}</code> 1 TEXT 2 [-+]DIMENSION 3 BEFEHL
<code>\limitatetext {...} {...,<sup>2</sup>...} {...}</code> 1 TEXT 2 [-+]DIMENSION 3 BEFEHL
<code>\linebox {...}</code> * CONTENT
<code>\LINENOTE {...}</code> * TEXT instances: linenote
<code>\linenote {...}</code> * TEXT
<code>\linespanningtext {...} {...} {...}</code> 1 TEXT 2 DIMENSION 3 FONT
<code>\linie {...}</code> * CONTENT
<code>\linieneagra [...,<sup>*</sup>...,...]</code> * inherits: \seteazalinif <sup>RT</sup> inegre
<code>\liniesubtire</code>
<code>\linieumplere [...,<sup>*</sup>...,...]</code> * inherits: \seteazaliniiumplere
<code>\liniinegre [...,<sup>*</sup>...,...]</code> * inherits: \seteazalinif <sup>RT</sup> inegre
<code>\liniisubtiri [...,<sup>*</sup>...,...]</code> * inherits: \seteazalinif <sup>RT</sup> esubtire

```
\listcitation [...1...][...2]
1  referinta = REFERENCE
   alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
               authoryear
   inainte   = BEFEHL
   dupa      = BEFEHL
   stanga    = BEFEHL
   dreapta   = BEFEHL
   inherits: \setupbtx
2  REFERENCE
```

```
\listcitation [...1...][...2]
1  implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2  REFERENCE
```

```
\listcitation [...1...][...2...]
1  referinta = REFERENCE
   alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
               authoryear
   inainte   = BEFEHL
   dupa      = BEFEHL
   stanga    = BEFEHL
   dreapta   = BEFEHL
   inherits: \setupbtx
2  KEY = VALUE
```

```
\listcite [...1...][...2]
1  referinta = REFERENCE
   alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
               authoryear
   inainte   = BEFEHL
   dupa      = BEFEHL
   stanga    = BEFEHL
   dreapta   = BEFEHL
   inherits: \setupbtx
2  REFERENCE
```

```
\listcite [...1...][...2]
1  implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2  REFERENCE
```

```
\listcite [...1...][...2...]
1  referinta = REFERENCE
   alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
               authoryear
   inainte   = BEFEHL
   dupa      = BEFEHL
   stanga    = BEFEHL
   dreapta   = BEFEHL
   inherits: \setupbtx
2  KEY = VALUE
```

```
\listnamespaces
```

```
\litera {...}
*  NUMMER
```

```
\litere {...}
*  NUMMER
```

```
\llap {...}
*  CONTENT
```

```
\loadanyfile {...}
*  FILE
```

\loadanyfileonce [...] * FILE
\loadbtxdefinitionfile [...] * FILE
\loadbtxreplacementfile [...] * FILE
\loadcldfile [...] * FILE
\loadcldfileonce [...] * FILE
\loadfontgoodies [...] * FILE
\loadluafile [...] * FILE
\loadluafileonce [...] * FILE
\loadspellchecklist [...] <sup>1</sup> [...] <sup>2</sup> 1 NAME 2 FILE
\loadtexfile [...] * FILE
\loadtexfileonce [...] * FILE
\loadtypescriptfile [...] * FILE
\localframed [...] <sup>1</sup> [..., <sup>2</sup> ... <sup>2</sup> ...] {...} <sup>3</sup> 1 NAME 2 inherits: \setezainconjurat 3 CONTENT
\localframedwithsettings [...] <sup>1</sup> [..., <sup>2</sup> ... <sup>2</sup> ...] {...} <sup>3</sup> 1 NAME 2 inherits: \setezainconjurat 3 CONTENT
\localhsize
\localpopbox ... * CSNAME NUMBER
\localpopmacro \*... * CSNAME
\localpushbox ... * CSNAME NUMBER

<code>\localpushmacro \*..</code> <code>* CSNAME</code>
<code>\localundefine {...}</code> <code>* NAME</code>
<code>\locatedfilepath</code>
<code>\locatefilepath {...}</code> <code>* FILE</code>
<code>\locfilename {...}</code> <code>* FILE</code>
<code>\lomihi {...} {...} {...}</code> <code>1 CONTENT</code> <code>2 CONTENT</code> <code>3 CONTENT</code>
<code>\lowerbox {...} \*.. {...}</code> <code>1 DIMENSION</code> <code>2 CSNAME</code> <code>3 CONTENT</code>
<code>\lowercased {...}</code> <code>* TEXT</code>
<code>\lowercasestring ... \to \*..</code> <code>1 TEXT</code> <code>2 CSNAME</code>
<code>\lowerlefthdoubleninequote</code>
<code>\lowerleftsingleninequote</code>
<code>\lowerrighthdoubleninequote</code>
<code>\lowerrightsingleninequote</code>
<code>\LOWHIGH [...<sup>1</sup>] {...} {...}</code> <code>1 stanga dreapta</code> <code>2 CONTENT</code> <code>3 CONTENT</code>
<code>\LOWMIDHIGH {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>}</code> <code>1 CONTENT</code> <code>2 CONTENT</code> <code>3 CONTENT</code>
<code>\lrbbox {...} {...} {...} {...} {...}</code> <code>1 DIMENSION</code> <code>2 DIMENSION</code> <code>3 DIMENSION</code> <code>4 DIMENSION</code> <code>5 CONTENT</code>
<code>\ltop ...<sup>1</sup> {...<sup>2</sup>}</code> <code>1 TEXT<sup>OPT</sup></code> <code>2 CONTENT</code>

<code>\luaocode {...}</code> * BEFEHL
<code>\luaconditional \*..</code> * CSNAME
<code>\luaenvironment ...</code> * FILE
<code>\luaexpanded {...}</code> * BEFEHL
<code>\luaexpr {...}</code> * CONTENT
<code>\luafunction {...}</code> * BEFEHL
<code>\luajitTeX</code>
<code>\luamajorversion</code>
<code>\luaminorversion</code>
<code>\luaparameterset {...} {...}</code> 1 NAME 2 CONTENT
<code>\luasetup {...}</code> * NAME
<code>\luaTeX</code>
<code>\luaversion</code>
<code>\luna {...}</code> * NUMMER
<code>\lungimelista</code>
<code>\METAFONT</code>
<code>\METAFUN</code>
<code>\METAPOST</code>
<code>\MetaFont</code>
<code>\MetaFun</code>
<code>\MetaPost</code>
<code>\MKII</code>
<code>\MKIV</code>

<code>\MKIX</code>
<code>\MKVI</code>
<code>\MKXI</code>
<code>\MONTHLONG {...}</code> *   NUMBER
<code>\MONTHSHORT {...}</code> *   NUMBER
<code>\MPanchor {...}</code> *   NAME
<code>\MPbetex {...}</code> *   NAME
<code>\MPc {...}</code> *   NAME
<code>\MPcode {...} {...}</code> 1   NAME       OPT 2   CONTENT
<code>\MPcolor {...}</code> *   COLOR
<code>\MPcoloronly {...}</code> *   COLOR
<code>\MPcolumn {...}</code> *   NAME
<code>\MPd {...}</code> *   NAME
<code>\MPdrawing {...}</code> *   CONTENT
<code>\MPfontsizehskip {...}</code> *   FONT
<code>\MPgetmultipars {...} {...}</code> 1   NAME 2   NAME
<code>\MPgetmultishape {...} {...}</code> 1   NAME 2   NAME
<code>\MPgetposboxes {...,<sup>1</sup>...} {...<sup>2</sup>}</code> 1   NAME 2   NAME
<code>\MPh {...}</code> *   NAME

\MPII
\MPIV
\MPinclusions [ <sup>1</sup> ...] { <sup>2</sup> ...} { <sup>3</sup> ...} 1    +                    OPT        OPT 2    NAME 3    CONTENT
\MPlleftskip {...} *    NAME
\MPl1 {...} *    NAME
\MPlr {...} *    NAME
\MPls {...} *    NAME
\MPmenubuttons {...} *    NAME
\MPn {...} *    NAME
\MPOptions {...} *    COLOR
\MPOverlayanchor {...} *    NAME
\MPP {...} *    NAME
\MPPage {...} *    NAME
\MPPardata {...} *    NAME
\MPPplus { <sup>1</sup> ...} { <sup>2</sup> ...} { <sup>3</sup> ...} 1    NAME 2    NUMMER 3    CONTENT
\MPPos {...} *    NAME
\MPPositiongraphic { <sup>1</sup> ...} { <sup>2</sup> ...,... <sub>OPT</sub> ...} 1    NAME 2    KEY = VALUE
\MPPosset {...} *    NAME



\MP <sub>r</sub> {...} *   NAME
\MP <sub>r</sub> awvar {...} {...} 1   NAME 2   KEY
\MP <sub>r</sub> egion {...} *   NAME
\MP <sub>r</sub> est {...} {...} 1   NAME 2   CONTENT
\MP <sub>r</sub> ightskip {...} *   NAME
\MP <sub>r</sub> s {...} *   NAME
\MP <sub>s</sub> tring {...} *   NAME
\MP <sub>t</sub> ext {...} *   NAME
\MP <sub>t</sub> ransparency {...} *   COLOR
\MP <sub>u</sub> l {...} *   NAME
\MP <sub>u</sub> r {...} *   NAME
\MP <sub>V</sub> I
\MP <sub>v</sub> {...} {...} {...} 1   NAME 2   NUMMER 3   CONTENT
\MP <sub>v</sub> ar {...} *   KEY
\MP <sub>v</sub> ariable {...} *   KEY
\MP <sub>v</sub> v {...} {...} 1   NAME 2   CONTENT
\MP <sub>w</sub> {...} *   NAME
\MP <sub>w</sub> hd {...} *   NAME

<code>\MPx {...}</code> *    NAME
<code>\MPxy {...}</code> *    NAME
<code>\MPxywhd {...}</code> *    NAME
<code>\MPy {...}</code> *    NAME
<code>\m [...] {...}</code> 1    NAME 2    CONTENT
<code>\makecharacteractive ...</code> *    CHARACTER
<code>\makerawcommalist [...<sup>1</sup>,...] \<sup>2</sup>...</code> 1    BEFEHL 2    CSNAME
<code>\makestrutofbox ...</code> *    CSNAME NUMBER
<code>\mapfontsize [...]<sup>1</sup> [...]<sup>2</sup></code> 1    DIMENSION 2    DIMENSION
<code>\marcaje (...<sup>1</sup>,...) (...<sup>2</sup>,...) [...]<sup>3</sup></code> 1    POSITION 2    POSITION 3    REFERENCE
<code>\mare ...</code> *    CHARACTER
<code>\margindata [...]<sup>1</sup> [...,<sup>2</sup>...,...]<sup>OPT</sup> [...,<sup>3</sup>...,...]<sup>OPT</sup> {...}<sup>4</sup></code> 1    NAME 2    referinta = REFERENCE inherits: \setupmargindata 3    inherits: \setupmarginframed 4    CONTENT
<code>\MARGINDATA [...,<sup>1</sup>...,...]<sup>OPT</sup> [...,<sup>2</sup>...,...]<sup>OPT</sup> {...}<sup>3</sup></code> 1    referinta = REFERENCE inherits: \setupmargindata 2    inherits: \setupmarginframed 3    CONTENT  instances: inleftmargin inrightmargin inoutermargin ininnermargin inleftedge inrightedge inouteredge ininneredge atleftmargin atrightmargin inleft inright inouter ininner inmargin inother margintext
<code>\atleftmargin [...,<sup>1</sup>...,...]<sup>OPT</sup> [...,<sup>2</sup>...,...]<sup>OPT</sup> {...}<sup>3</sup></code> 1    referinta = REFERENCE inherits: \setupmargindata 2    inherits: \setupmarginframed 3    CONTENT

```

\atrightmargin [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 referinta = REFERENCEOPT
  inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\ininner [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 referinta = REFERENCEOPT
  inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\ininneredge [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 referinta = REFERENCEOPT
  inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\ininnermargin [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 referinta = REFERENCEOPT
  inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inleft [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 referinta = REFERENCEOPT
  inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inleftedge [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 referinta = REFERENCEOPT
  inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inleftmargin [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 referinta = REFERENCEOPT
  inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inmargin [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 referinta = REFERENCEOPT
  inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inother [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 referinta = REFERENCEOPT
  inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inouter [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 referinta = REFERENCEOPT
  inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inouteredge [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 referinta = REFERENCEOPT
  inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

$\backslash inoutermargin$ [ $\dots$ $\overset{1}{=}$ $\dots$ ] [ $\dots$ $\overset{2}{=}$ $\dots$ ] $\{\dots\}$ 1    referinta = REFERENCE <sup>OPT</sup> inherits: \setupmargindata 2    inherits: \setupmarginframed 3    CONTENT
$\backslash inright$ [ $\dots$ $\overset{1}{=}$ $\dots$ ] [ $\dots$ $\overset{2}{=}$ $\dots$ ] $\{\dots\}$ 1    referinta = REFERENCE <sup>OPT</sup> inherits: \setupmargindata 2    inherits: \setupmarginframed 3    CONTENT
$\backslash inrightedge$ [ $\dots$ $\overset{1}{=}$ $\dots$ ] [ $\dots$ $\overset{2}{=}$ $\dots$ ] $\{\dots\}$ 1    referinta = REFERENCE <sup>OPT</sup> inherits: \setupmargindata 2    inherits: \setupmarginframed 3    CONTENT
$\backslash inrightmargin$ [ $\dots$ $\overset{1}{=}$ $\dots$ ] [ $\dots$ $\overset{2}{=}$ $\dots$ ] $\{\dots\}$ 1    referinta = REFERENCE <sup>OPT</sup> inherits: \setupmargindata 2    inherits: \setupmarginframed 3    CONTENT
$\backslash margintext$ [ $\dots$ $\overset{1}{=}$ $\dots$ ] [ $\dots$ $\overset{2}{=}$ $\dots$ ] $\{\dots\}$ 1    referinta = REFERENCE <sup>OPT</sup> inherits: \setupmargindata 2    inherits: \setupmarginframed 3    CONTENT
$\backslash markcontent$ [ $\overset{1}{\dots}$ ] $\{\overset{2}{\dots}\}$ 1    reset tot NAME <sup>OPT</sup> 2    CONTENT
$\backslash markedpages$ [ $\dots$ ] *    NAME
$\backslash markinjector$ [ $\dots$ ] *    NAME
$\backslash markpage$ [ $\overset{1}{\dots}$ ] [ $\dots$ $\overset{2}{=}$ $\dots$ ] 1    NAME <sup>OPT</sup> 2    [-+]NUMBER
$\backslash mat$ $\{\dots\}$ *    CONTENT
$\backslash matematica$ [ $\overset{1}{\dots}$ ] $\{\overset{2}{\dots}\}$ 1    NAME <sup>OPT</sup> 2    CONTENT
$\backslash math$ [ $\overset{1}{\dots}$ ] $\{\overset{2}{\dots}\}$ 1    NAME <sup>OPT</sup> 2    CONTENT
$\backslash mathbf$
$\backslash mathbi$
$\backslash mathblackboard$
$\backslash mathbs$

$\backslash\text{MATHCOMMAND}$ $\{.^1.\}$ $\{.^2.\}$ 1    TEXT                    OPT            OPT 2    TEXT
$\backslash\text{mathdefault}$
$\backslash\text{mathdouble}$ $[.^1.]$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ 1    ambele vfenced <sup>OPT</sup> 2    NUMMER 3    TEXT 4    TEXT
$\backslash\text{MATHDOUBLEEXTENSIBLE}$ $\{.^1.\}$ $\{.^2.\}$ 1    TEXT 2    TEXT instances: doublebar doublebrace doubleparent doublebracket overbarunderbar overbraceunderbrace overparentunderparent overbracketunderbracket
$\backslash\text{doublebar}$ $\{.^1.\}$ $\{.^2.\}$ 1    TEXT 2    TEXT
$\backslash\text{doublebrace}$ $\{.^1.\}$ $\{.^2.\}$ 1    TEXT 2    TEXT
$\backslash\text{doublebracket}$ $\{.^1.\}$ $\{.^2.\}$ 1    TEXT 2    TEXT
$\backslash\text{doubleparent}$ $\{.^1.\}$ $\{.^2.\}$ 1    TEXT 2    TEXT
$\backslash\text{overbarunderbar}$ $\{.^1.\}$ $\{.^2.\}$ 1    TEXT 2    TEXT
$\backslash\text{overbraceunderbrace}$ $\{.^1.\}$ $\{.^2.\}$ 1    TEXT 2    TEXT
$\backslash\text{overbracketunderbracket}$ $\{.^1.\}$ $\{.^2.\}$ 1    TEXT 2    TEXT
$\backslash\text{overparentunderparent}$ $\{.^1.\}$ $\{.^2.\}$ 1    TEXT 2    TEXT

`\MATHEXTENSIBLE {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

instances: xrel xequal xleftarrow xrightarrow xleftrightharrow xLeftarrow xRightarrow  
xleftrightharpoon xtwoheadleftarrow xtwoheadrightarrow xmapsto xhookleftarrow xhookrightarrow  
xleftharpoondown xleftharpoonup xrightarpoon xrightarpoonup xrightoverleftarrow  
xleftrightharpoons xrightleftharpoons xtriplerel mrel mequal mleftarrow mrightarrow mleftrightharpoon  
mLeftarrow mRightarrow mLeftrightharpoon mtwoheadleftarrow mtwoheadrightarrow mmapsto mhookleftarrow  
mhookrightarrow mleftharpoondown mleftharpoonup mrightarpoon mrightarpoonup mrightoverleftarrow  
mleftrightharpoons mrightleftharpoons mtriplerel eleftrightarrowfill erightarrowfill eleftrightarrowfill  
etwoheadrightarrowfill eleftharpoondownfill eleftharpoonupfill erightharpoondownfill  
erightharpoonupfill eoverbarfill eunderbarfill eoverbracefill eunderbracefill eoverparentfill  
eunderparentfill eoverbracketfill eunderbracketfill trel tequal tmapsto tleftarrow trightarrow  
tleftrightarrow tLeftarrow tRightarrow tleftrightharpoon ttwoheadleftarrow ttwoheadrightarrow  
thookleftarrow thookrightarrow tleftharpoondown tleftharpoonup trightharpoondown trightharpoonup  
trightoverleftarrow tleftrightharpoons trightleftharpoons ttriplerel cleftarrow crightarrow  
crightoverleftarrow

`\cleftarrow {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\crightarrow {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\crightoverleftarrow {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\eleftrightarrowfill {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\eleftharpoondownfill {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\eleftharpoonupfill {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\eleftrightarrowfill {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\eoverbarfill {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\eoverbracefill {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\eoverbracketfill {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\eoverparentfill {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

$$\rightarrowfill \{...\} \{...\}$$

1	TEXT	OPT	OPT
---	------	-----	-----

2 TEXT

$$\searrow \text{erightharpoonowdownfill} \{...\} \{...\}$$

1	TEXT	OPT	OPT
---	------	-----	-----

2 TEXT

$$\text{\texttt{\textbackslash erightharpoonupupfill}} \{...\} \{...\}$$

1	TEXT	OPT	OPT
---	------	-----	-----

2 TEXT

$$\etwoheadrightarrowfill \{...\} \{...\}$$

1	TEXT	OPT	OPT
---	------	-----	-----

2 TEXT

$$\backslash eunderbarfill \{...\} \{...\}$$

1	TEXT	OPT	OPT
---	------	-----	-----

2 TEXT

$$\backslash eunderbracefill \{...\} \{...\}$$

1	TEXT	OPT	OPT
---	------	-----	-----

```
1  TEXT
2  TEXT
```

$$\underbrace{\phantom{\dots}}^{.^{.1.}} \underbrace{\phantom{\dots}}^{.^{.2.}}$$

1	TEXT	OPT	OPT
---	------	-----	-----

```

1  TEXT
2  TEXT

```

$$\backslash\mathrm{eunderparentfill}\{\ldots\}\{\ldots\}$$

1	TEXT	OPT	OPT
---	------	-----	-----

2 TEXT

$$\backslash mequal \{.\overset{1}{.}\} \{.\overset{2}{.}\}$$

1	TEXT	OPT	OPT
---	------	-----	-----

2 TEXT

 $\hookrightarrow \{...\}^1 \{...\}^2$ 

1	TEXT	OPT	OPT
---	------	-----	-----

2 TEXT

 $\hookrightarrow \{...\} \{...\}$ 

1	TEXT	OPT	OPT
---	------	-----	-----

```
1 TEXT
2 TEXT
```

 $\mathrel{\mathop{\rightarrow}\limits^m} \{...\}^1 \{...\}^2$ 

1	TEXT	OPT	OPT
---	------	-----	-----

2 TEXT

$$\multimap \{...\} \{...\}$$

1	TEXT	OPT	OPT
---	------	-----	-----

2 TEXT

$$\mleftarrow{\dots} \{\dots\}$$

1	TEYT	OPT	OPT
---	------	-----	-----

1 TEXT  
2 TEXT

 $\leftharpoonown \{.^1.\} \{.^2.\}$ 

1	TEXT	OPT	OPT
1	TEXT	OPT	OPT

2 TEXT

$\mleftharpoonup \{...\} \{...\}$ 1    TEXT                    OPT            OPT 2    TEXT
$\mleftrightharpoonup \{...\} \{...\}$ 1    TEXT                    OPT            OPT 2    TEXT
$\mleftrightharpoons \{...\} \{...\}$ 1    TEXT                    OPT            OPT 2    TEXT
$\mmapsto \{...\} \{...\}$ 1    TEXT                    OPT            OPT 2    TEXT
$\mRightharpoonup \{...\} \{...\}$ 1    TEXT                    OPT            OPT 2    TEXT
$\mrel \{...\} \{...\}$ 1    TEXT    OPT            OPT 2    TEXT
$\mrightarrow \{...\} \{...\}$ 1    TEXT                    OPT            OPT 2    TEXT
$\mrightharpoonrightarrow \{...\} \{...\}$ 1    TEXT                    OPT            OPT 2    TEXT
$\mrightharpoonup \{...\} \{...\}$ 1    TEXT                    OPT            OPT 2    TEXT
$\mrightharpoonleft \{...\} \{...\}$ 1    TEXT                    OPT            OPT 2    TEXT
$\mrightharpoonoverleftarrow \{...\} \{...\}$ 1    TEXT                    OPT            OPT 2    TEXT
$\mtriplerel \{...\} \{...\}$ 1    TEXT                    OPT            OPT 2    TEXT
$\mtwoheadleftarrow \{...\} \{...\}$ 1    TEXT                    OPT            OPT 2    TEXT
$\mtwoheadrightarrow \{...\} \{...\}$ 1    TEXT                    OPT            OPT 2    TEXT
$\tequal \{...\} \{...\}$ 1    TEXT                    OPT            OPT 2    TEXT



`\thookleftarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\thookrightarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tleftarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tlefttrightharpoonrightarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tleftarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tleftharpoonrightarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tleftharpoonrightarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tleftrightarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tleftrightharpoons {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tmapsto {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\trightarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\trrel {...} {...}`

1    TEXT    OPT            OPT

2    TEXT

`\rightarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\trightharpoonrightarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\trightharpoonrightarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

$$\trightleftharpoons \{...\} \{...\}$$

1	TEXT	OPT	OPT
---	------	-----	-----

2 TEXT

$$\text{\texttt{\textbackslash trightoverleftarrow}} \{...\} \{...\}$$

1	TEXT	OPT	OPT
---	------	-----	-----

1	TEXT
2	TEXT

$$\text{\tt\tttriplerel} \{...\} \{...\}$$

1	TEXT	OPT	OPT
---	------	-----	-----

2 TEXT

 $\twoheadrightarrow \{...\} \{...\}$ 

1	TEXT	OPT	OPT
---	------	-----	-----

2 TEXT

 $\twoheadrightarrow \{...\}^1 \{...\}^2$ 

1	TEXT	OPT	OPT
2	1.00	1.00	1.00
3	1.00	1.00	1.00
4	1.00	1.00	1.00
5	1.00	1.00	1.00
6	1.00	1.00	1.00
7	1.00	1.00	1.00
8	1.00	1.00	1.00
9	1.00	1.00	1.00
10	1.00	1.00	1.00
11	1.00	1.00	1.00
12	1.00	1.00	1.00
13	1.00	1.00	1.00
14	1.00	1.00	1.00
15	1.00	1.00	1.00
16	1.00	1.00	1.00
17	1.00	1.00	1.00
18	1.00	1.00	1.00
19	1.00	1.00	1.00
20	1.00	1.00	1.00
21	1.00	1.00	1.00
22	1.00	1.00	1.00
23	1.00	1.00	1.00
24	1.00	1.00	1.00
25	1.00	1.00	1.00
26	1.00	1.00	1.00
27	1.00	1.00	1.00
28	1.00	1.00	1.00
29	1.00	1.00	1.00
30	1.00	1.00	1.00
31	1.00	1.00	1.00
32	1.00	1.00	1.00
33	1.00	1.00	1.00
34	1.00	1.00	1.00
35	1.00	1.00	1.00
36	1.00	1.00	1.00
37	1.00	1.00	1.00
38	1.00	1.00	1.00
39	1.00	1.00	1.00
40	1.00	1.00	1.00
41	1.00	1.00	1.00
42	1.00	1.00	1.00
43	1.00	1.00	1.00
44	1.00	1.00	1.00
45	1.00	1.00	1.00
46	1.00	1.00	1.00
47	1.00	1.00	1.00
48	1.00	1.00	1.00
49	1.00	1.00	1.00
50	1.00	1.00	1.00
51	1.00	1.00	1.00
52	1.00	1.00	1.00
53	1.00	1.00	1.00
54	1.00	1.00	1.00
55	1.00	1.00	1.00
56	1.00	1.00	1.00
57	1.00	1.00	1.00
58	1.00	1.00	1.00
59	1.00	1.00	1.00
60	1.00	1.00	1.00
61	1.00	1.00	1.00
62	1.00	1.00	1.00
63	1.00	1.00	1.00
64	1.00	1.00	1.00
65	1.00	1.00	1.00
66	1.00	1.00	1.00
67	1.00	1.00	1.00
68	1.00	1.00	1.00
69	1.00	1.00	1.00
70	1.00	1.00	1.00
71	1.00	1.00	1.00
72	1.00	1.00	1.00
73	1.00	1.00	1.00
74	1.00	1.00	1.00
75	1.00	1.00	1.00
76	1.00	1.00	1.00
77	1.00	1.00	1.00
78	1.00	1.00	1.00
79	1.00	1.00	1.00
80	1.00	1.00	1.00
81	1.00	1.00	1.00
82	1.00	1.00	1.00
83	1.00	1.00	1.00
84	1.00	1.00	1.00
85	1.00	1.00	1.00
86	1.00	1.00	1.00
87	1.00	1.00	1.00
88	1.00	1.00	1.00
89	1.00	1.00	1.00
90	1.00	1.00	1.00
91	1.00	1.00	1.00

2 TEXT

$$\backslash xequal \{.\!.\!.\}^1 \{.\!.\!.\}^2$$

	TEXT	OPT	OPT
--	------	-----	-----

```

1  TEXT
2  TEXT

```

 $\xhookrightarrow{\{...\} \{...\}}$ 

1	TEXT	OPT	OPT
---	------	-----	-----

```
1 TEXT
2 TEXT
```

 $\xhookrightarrow{\{...\} \{...\}}$ 

1	TEXT	OPT	OPT
2	1		
3	2		
4	3		
5	4		
6	5		
7	6		
8	7		
9	8		
10	9		
11	10		
12	11		
13	12		
14	13		
15	14		
16	15		
17	16		
18	17		
19	18		
20	19		
21	20		
22	21		
23	22		
24	23		
25	24		
26	25		
27	26		
28	27		
29	28		
30	29		
31	30		
32	31		
33	32		
34	33		
35	34		
36	35		
37	36		
38	37		
39	38		
40	39		
41	40		
42	41		
43	42		
44	43		
45	44		
46	45		
47	46		
48	47		
49	48		
50	49		
51	50		
52	51		
53	52		
54	53		
55	54		
56	55		
57	56		
58	57		
59	58		
60	59		
61	60		
62	61		
63	62		
64	63		
65	64		
66	65		
67	66		
68	67		
69	68		
70	69		
71	70		
72	71		
73	72		
74	73		
75	74		
76	75		
77	76		
78	77		
79	78		
80	79		
81	80		
82	81		
83	82		
84	83		
85	84		
86	85		
87	86		
88	87		
89	88		
90	89		
91	90		
92	91		
93	92		
94	93		
95	94		
96	95		
97	96		
98	97		
99	98		
100	99		

2 TEXT

$$\xrightarrow{\{...\} \{...\}}$$

1	TEXT	OPT	OPT
---	------	-----	-----

2 TEXT

$$\xLeftarrow{\dots} \xRightarrow{\dots}$$

1	TEXT	OPT	OPT
---	------	-----	-----

2 TEXT

 $\xrightarrow{\{...\} \{...\}}$ 

1	TEXT	OPT	OPT
---	------	-----	-----

```
1  TEXT
2  TEXT
```

 $\xleftarrow{\text{tharpoondown}} \{...\}^1 \{...\}^2$ 

1	TEXT	OPT	OPT
---	------	-----	-----

2 TEXT

$$\xleftarrow{\text{tharpoonup}} \{...\}^1 \{...\}^2$$

1	TEXT	OPT	OPT
2	1. The first step in the process of creating a new product is to identify a market need.		
3	2. Once a market need has been identified, the next step is to develop a prototype.		
4	3. The prototype is then tested to determine if it meets the market need.		
5	4. If the prototype is successful, the next step is to create a business plan.		
6	5. The business plan is then used to secure funding for the new product.		
7	6. Once funding has been secured, the next step is to manufacture the product.		
8	7. The product is then distributed to the market.		
9	8. The final step in the process is to monitor the product's performance.		
10	9. If the product is successful, the next step is to develop a new product.		
11	10. The process of creating a new product is a continuous cycle.		

2 TEXT

$$\xleftrightarrow{\dots} \{\dots\}$$

1	TEXT	OPT	OPT
---	------	-----	-----

1 TEXT  
2 TEXT

$$\xleftrightarrow{\dots} \dots$$

1	TEXT	OPT	OPT
---	------	-----	-----

```

1  TEXT
2  TEXT

```

1	TEXT	OPT	OPT
2	TEXT		

1	TEXT	OPT	OPT
2	TEXT		

```

1  TEXT  OPT      OPT
2  TEXT

```

1	TEXT	OPT	OPT
2	TEXT		

1	TEXT	OPT	OPT
2	TEXT		

1	TEXT	OPT	OPT
2	TEXT		

1	TEXT	OPT	OPT
2	TEXT		

1	TEXT	OPT	OPT
2	TEXT		

1	TEXT	OPT	OPT
2	TEXT		

1	TEXT	OPT	OPT
2	TEXT		

1	TEXT	OPT	OPT
2	TEXT		

 $\mathfrak{f}$ 

```

1 inherits: \setupmathframednpf
2 CONTENT

```

```
1 inherits: \setupmathframedOPT
2 CONTENT
```

```
1 inherits: \setupOPTmathframed
2 CONTENT
```

$\mframed$ [ $\dots$ $\stackrel{.1}{=}\dots$ ] $\{ \dots \}$ 1 inherits: $\setup$ $\mathframed$ 2 CONTENT
$\mathfunction$ $\{ \dots \}$ * CONTENT
$\mathit$
$\mathitalic$
$\MATHMATRIX$ $\{ \dots \}$ * CONTENT
$\mathop$ $\{ \dots \}$ * CONTENT
$\MATHORNAMENT$ $\{ \dots \}$ * CONTENT
$\mathover$ [ $\dots$ ] $\{ \dots \}$ $\{ \dots \}$ 1 sus $\vfenced$ $\mathover$ 2 NUMBER 3 TEXT
$\MATHOVEREXTENSIBLE$ $\{ \dots \}$ * TEXT
$\MATHOVERTEXTEXTENSIBLE$ $\{ \dots \}$ $\{ \dots \}$ 1 TEXT 2 TEXT <b>instances:</b>
$\MATHRADICAL$ [ $\dots$ ] $\{ \dots \}$ 1 TEXT $\mathover$ 2 CONTENT
$\mathrm$
$\mathscript$
$\mathsl$
$\mathss$
$\mathtext$ $\dots$ $\{ \dots \}$ 1 TEXT $\mathover$ 2 TEXT
$\mathtextbf$ $\dots$ $\{ \dots \}$ 1 TEXT $\mathover$ 2 TEXT
$\mathtextbi$ $\dots$ $\{ \dots \}$ 1 TEXT $\mathover$ 2 TEXT

$\backslash\mathtextbs$ $\dots$ $\{^1\dots\}$ 1    TEXT            OPT 2    TEXT
$\backslash\mathtextit$ $\dots$ $\{^1\dots\}$ 1    TEXT            OPT 2    TEXT
$\backslash\mathtextsl$ $\dots$ $\{^1\dots\}$ 1    TEXT            OPT 2    TEXT
$\backslash\mathtexttf$ $\dots$ $\{^1\dots\}$ 1    TEXT            OPT 2    TEXT
$\backslash\mathtf$
$\backslash\mathtripler$ $[^1\dots]$ $\{^2\dots\}$ $\{^3\dots\}$ $\{^4\dots\}$ 1    NAME            OPT            OPT            OPT            OPT 2    TEXT 3    TEXT 4    TEXT
$\backslash\mathtriplet$ $[^1\dots]$ $\{^2\dots\}$ $\{^3\dots\}$ $\{^4\dots\}$ 1    NAME            OPT            OPT            OPT            OPT 2    TEXT 3    TEXT 4    TEXT
$\backslash\mathtt$
$\backslash\mathunder$ $[^1\dots]$ $\{^2\dots\}$ $\{^3\dots\}$ 1    subsol    vfence $\math$ 2    NUMMER 3    TEXT
$\backslash\mathunderextensible$ $\{^*\dots\}$ *    TEXT
$\backslash\mathunderextextensible$ $\{^1\dots\}$ $\{^2\dots\}$ 1    TEXT 2    TEXT instances:
$\backslash\mathunstacked$
$\backslash\mathupright$
$\backslash\mathword$ $\dots$ $\{^1\dots\}$ 1    TEXT            OPT 2    TEXT
$\backslash\mathwordbf$ $\dots$ $\{^1\dots\}$ 1    TEXT            OPT 2    TEXT
$\backslash\mathwordbi$ $\dots$ $\{^1\dots\}$ 1    TEXT            OPT 2    TEXT

$\backslash\mathrm{mathwordbs} \mathrel{\mathop{\cdot}\limits^1} \dots \{\mathrel{\mathop{\cdot}\limits^2} \dots\}$ 1    TEXT            OPT 2    TEXT
$\backslash\mathrm{mathwordit} \mathrel{\mathop{\cdot}\limits^1} \dots \{\mathrel{\mathop{\cdot}\limits^2} \dots\}$ 1    TEXT            OPT 2    TEXT
$\backslash\mathrm{mathwordsl} \mathrel{\mathop{\cdot}\limits^1} \dots \{\mathrel{\mathop{\cdot}\limits^2} \dots\}$ 1    TEXT            OPT 2    TEXT
$\backslash\mathrm{mathwordtf} \mathrel{\mathop{\cdot}\limits^1} \dots \{\mathrel{\mathop{\cdot}\limits^2} \dots\}$ 1    TEXT            OPT 2    TEXT
$\backslash\mathrm{maxaligned} \{...\}$ *    CONTENT
$\backslash\mathrm{mbox} \{...\}$ *    CONTENT
$\backslash\mathrm{measure} \{...\}$ *    NAME
$\backslash\mathrm{measured} \{...\}$ *    NAME
$\backslash\mathrm{mediu} [...]$ *    FILE
$\backslash\mathrm{mediu} \mathrel{\mathop{\cdot}\limits^*}$ *    FILE
$\backslash\mathrm{medskip}$
$\backslash\mathrm{medspace}$
$\backslash\mathrm{menuinteractiune} [\mathrel{\mathop{\cdot}\limits^1} \dots] [\dots, \dots, \mathrel{\mathop{\cdot}\limits^2} \dots, \dots]$ 1    NAME                    OPT 2    inherits: $\backslash\mathrm{seteazameniuinteractiune}$
$\backslash\mathrm{message} \{...\}$ *    TEXT
$\backslash\mathrm{metaTeX}$
$\backslash\mathrm{mfence} \{...\}$ *    CHARACTER
$\backslash\mathrm{mfunction} \{...\}$ *    CONTENT
$\backslash\mathrm{mfunctionlabeltext} \{...\}$ *    NAME
$\backslash\mathrm{mhbox} \{...\}$ *    CONTENT

<code>\mic</code>
<code>\micaldin</code>
<code>\micaldininclinat</code>
<code>\micinclinat</code>
<code>\micinclinataldin</code>
<code>\micitalicaldin</code>
<code>\micnormal</code>
<code>\mictype</code>
<code>\middlealigned {...}</code> *    CONTENT
<code>\middlebox {...}</code> *    CONTENT
<code>\midhbox {...}</code> *    CONTENT
<code>\midsubsentence</code>
<code>\minimalhbox <sup>1</sup>... <sup>2</sup>{...}</code> 1    TEXT            OPT 2    CONTENT
<code>\mixedcaps {...}</code> *    TEXT
<code>\mkvibuffer [...]</code> *    BUFFER            OPT
<code>\moduleparameter <sup>1</sup>{...} <sup>2</sup>{...}</code> 1    FILE 2    KEY
<code>\molecule {...}</code> *    CONTENT
<code>\mono</code>
<code>\monoaldin</code>
<code>\mononormal</code>
<code>\monthlong {...}</code> *    NUMMER
<code>\monthshort {...}</code> *    NUMMER

<code>\mprandomnumber</code>
<code>\mtext {...}</code> *   CONTENT
<code>\NormalizeFontHeight \<sup>1</sup>... {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...}</code> 1   CSNAME 2   TEXT 3   DIMENSION 4   FONT
<code>\NormalizeFontWidth \<sup>1</sup>... {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...}</code> 1   CSNAME 2   TEXT 3   DIMENSION 4   FONT
<code>\NormalizeTextHeight {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}</code> 1   FONT 2   DIMENSION 3   TEXT
<code>\NormalizeTextWidth {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}</code> 1   FONT 2   DIMENSION 3   TEXT
<code>\Numere {...}</code> *   NUMMER
<code>\Numereromane {...}</code> *   NUMMER
<code>\namedheadnumber {...}</code> *   ABSCHNITT
<code>\namedstructureheadlocation {...}</code> *   ABSCHNITT
<code>\namedstructureuservariable {<sup>1</sup>...} {<sup>2</sup>...}</code> 1   ABSCHNITT 2   KEY
<code>\namedstructurevariable {<sup>1</sup>...} {<sup>2</sup>...}</code> 1   ABSCHNITT 2   KEY
<code>\namedtaggedlabeltexts {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...} {<sup>5</sup>...}</code> 1   NAME 2   NAME 3   NAME 4   NAME 5   CONTENT
<code>\naturalhbox <sup>1</sup>... {<sup>2</sup>...}</code> 1   TEXT           OPT 2   CONTENT
<code>\naturalhpack <sup>1</sup>... {<sup>2</sup>...}</code> 1   TEXT           OPT 2   CONTENT



$\backslash\text{naturalvbox}$ $\overset{1}{\dots}$ $\{\overset{2}{\dots}\}$ 1 TEXT OPT 2 CONTENT
$\backslash\text{naturalvcenter}$ $\overset{1}{\dots}$ $\{\overset{2}{\dots}\}$ 1 TEXT OPT 2 CONTENT
$\backslash\text{naturalvpack}$ $\overset{1}{\dots}$ $\{\overset{2}{\dots}\}$ 1 TEXT OPT 2 CONTENT
$\backslash\text{naturalvtop}$ $\overset{1}{\dots}$ $\{\overset{2}{\dots}\}$ 1 TEXT OPT 2 CONTENT
$\backslash\text{naturalwd}$ $\dots$ * CSNAME NUMBER
$\backslash\text{necunoscute}$
$\backslash\text{negatecolorbox}$ $\dots$ * CSNAME NUMBER
$\backslash\text{negated}$ $\{\dots\}$ * TEXT
$\backslash\text{negemspace}$
$\backslash\text{negenspace}$
$\backslash\text{negthinspace}$
$\backslash\text{newattribute}$ $\backslash\dots$ * CSNAME
$\backslash\text{newcatcodetable}$ $\backslash\dots$ * CSNAME
$\backslash\text{newcounter}$ $\backslash\dots$ * CSNAME
$\backslash\text{newevery}$ $\overset{1}{\backslash\dots}$ $\overset{2}{\backslash\dots}$ 1 CSNAME 2 CSNAME
$\backslash\text{newfrenchspacing}$
$\backslash\text{newmode}$ $\{\dots\}$ * NAME
$\backslash\text{newsignal}$ $\backslash\dots$ * CSNAME
$\backslash\text{newsystemmode}$ $\{\dots\}$ * NAME

<code>\nextbox</code>
<code>\nextboxdp</code>
<code>\nextboxht</code>
<code>\nextboxhtdp</code>
<code>\nextboxwd</code>
<code>\nextcounter</code> [ <sup>1</sup> ...] [ <sup>2</sup> ...] <div> <div>1</div> <div>NAME</div> </div> <div> <div></div> <div>OPT</div> </div> <div> <div>2</div> <div>NUMMER</div> </div>
<code>\nextcountervalue</code> [...] <div> <div>*</div> <div>NAME</div> </div>
<code>\nextdepth</code>
<code>\nextparagraphs</code>
<code>\urmatorulPARAGRAPHS</code>
<code>\nextrealpage</code>
<code>\nextrealpagenumber</code>
<code>\nextsubcountervalue</code> [ <sup>1</sup> ...] [ <sup>2</sup> ...] <div> <div>1</div> <div>NAME</div> </div> <div> <div>2</div> <div>NUMMER</div> </div>
<code>\nextsubpagenumber</code>
<code>\nextuserpage</code>
<code>\nextuserpagenumber</code>
<code>\nocharacteralign</code>
<code>\nocitation</code> [...] <div> <div>*</div> <div>REFERENCE</div> </div>
<code>\nocitation</code> {...} <div> <div>*</div> <div>REFERENCE</div> </div>
<code>\nocite</code> [...] <div> <div>*</div> <div>REFERENCE</div> </div>
<code>\nocite</code> {...} <div> <div>*</div> <div>REFERENCE</div> </div>
<code>\nodetostring</code> \ <sup>1</sup> ... { <sup>2</sup> ...} <div> <div>1</div> <div>CSNAME</div> </div> <div> <div>2</div> <div>CONTENT</div> </div>

<code>\nofigurepages</code>
<code>\noflines</code>
<code>\noflocalfloats</code>
<code>\noheightstrut</code>
<code>\noindentation</code>
<code>\noitem</code>
<code>\nokap {...}</code> * TEXT
<code>\nonfrenchspacing</code>
<code>\nonmathematics {...}</code> * CONTENT
<code>\normal</code>
<code>\normalboldface</code>
<code>\normalframedwithsettings [...<sup>1</sup>...<sup>2</sup>...] {...}</code> 1 inherits: \seteazainconjurat 2 CONTENT
<code>\normalitalicface</code>
<code>\normalizebodyfontsize \<sup>1</sup>... {...}</code> 1 CSNAME 2 DIMENSION
<code>\normalizedfontsize</code>
<code>\normalizefontdepth \<sup>1</sup>... {...} {...} {...}</code> 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT
<code>\normalizefontheight \<sup>1</sup>... {...} {...} {...}</code> 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT
<code>\normalizefontline \<sup>1</sup>... {...} {...} {...}</code> 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT
<code>\normalizefontwidth \<sup>1</sup>... {...} {...} {...}</code> 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT

<code>\normalizetextdepth {...} {...} {...}</code> 1 FONT 2 DIMENSION 3 TEXT
<code>\normalizetextheight {...} {...} {...}</code> 1 FONT 2 DIMENSION 3 TEXT
<code>\normalizetextline {...} {...} {...}</code> 1 FONT 2 DIMENSION 3 TEXT
<code>\normalizetextwidth {...} {...} {...}</code> 1 FONT 2 DIMENSION 3 TEXT
<code>\normalslantedface</code>
<code>\normaltypeface</code>
<code>\nota [...<sup>1</sup>] [...<sup>2</sup>]</code> 1 NAME <small>OPT</small> 2 REFERENCE
<code>\NOTE [...,<sup>1</sup>...] {...<sup>2</sup>}</code> 1 REFERENCE <sup>PT</sup> 2 TEXT <b>instances:</b> footnote endnote
<code>\NOTE [...,<sup>*</sup>...,...]</code> * titlu = TEXT semncarte = TEXT lista = TEXT referinta = REFERENCE <b>instances:</b> footnote endnote
<code>\endnote [...,<sup>*</sup>...,...]</code> * titlu = TEXT semncarte = TEXT lista = TEXT referinta = REFERENCE
<code>\footnote [...,<sup>*</sup>...,...]</code> * titlu = TEXT semncarte = TEXT lista = TEXT referinta = REFERENCE
<code>\endnote [...,<sup>1</sup>...] {...<sup>2</sup>}</code> 1 REFERENCE <small>OPT</small> 2 TEXT
<code>\footnote [...,<sup>1</sup>...] {...<sup>2</sup>}</code> 1 REFERENCE <small>OPT</small> 2 TEXT
<code>\notesymbol [...<sup>1</sup>] [...<sup>2</sup>]</code> 1 NAME <small>OPT</small> 2 REFERENCE

<code>\notragged</code>
<code>\ntimes {...} {...}</code> 1 TEXT 2 NUMMER
<code>\numarformula [...,*,...]</code> * REFERENCE OPT
<code>\numarpagina</code>
<code>\numartitlu [...<sup>1</sup>] [...<sup>2</sup>]</code> 1 ABSCHNITT OPT 2 precedent curent urmatorul primul ultim
<code>\numartitlucurent</code>
<code>\numberofpoints {...}</code> * DIMENSION
<code>\numere {...}</code> * NUMMER
<code>\numereromane {...}</code> * NUMMER
<code>\obeydepth</code>
<code>\objectdepth</code>
<code>\objectheight</code>
<code>\objectmargin</code>
<code>\objectwidth</code>
<code>\obox {...}</code> * CONTENT
<code>\offset [...,...<sup>1</sup>,...] {...<sup>2</sup>}</code> 1 inherits: \setupoffset OPT 2 CONTENT
<code>\offsetbox [...,...<sup>1</sup>,...] \...<sup>2</sup> {...<sup>3</sup>}</code> 1 inherits: \setupoffsetbox OPT 2 CSNAME 3 CONTENT
<code>\olinie [...]</code> * REFERENCE
<code>\onedigitrounding {...}</code> * NUMMER
<code>\ordinaldaynumber {...}</code> * NUMMER

<code>\ordinalstr {...}</code> * TEXT
<code>\ornamenttext [...<sup>1</sup>...<sup>1</sup>...] [...<sup>2</sup>...<sup>2</sup>...] {...} {...}</code> 1 alternativ = a b <small>OPT</small> inherits: \setupcollector 2 stil = STYLE BEFEHL culoare = COLOR inherits: \seteazainconjurat 3 TEXT 4 CONTENT
<code>\ornamenttext [...<sup>1</sup>] {...<sup>2</sup>} {...<sup>3</sup>}</code> 1 NAME 2 TEXT 3 CONTENT
<code>\ornamenttext [...<sup>1</sup>...<sup>1</sup>...] [...<sup>2</sup>...<sup>2</sup>...] {...} {...}</code> 1 alternativ = a b <small>OPT</small> inherits: \setupplayer 2 inherits: \setuplayeredtext 3 TEXT 4 CONTENT
<code>\ORNAMENT {...<sup>1</sup>} {...<sup>2</sup>}</code> 1 TEXT 2 CONTENT
<code>\outputfilename</code>
<code>\outputstreambox [...]</code> * NAME
<code>\outputstreamcopy [...]</code> * NAME
<code>\outputstreamunvbox [...]</code> * NAME
<code>\outputstreamunvcopy [...]</code> * NAME
<code>\over [...]</code> * REFERENCE
<code>\overlaybutton [...]</code> * REFERENCE
<code>\overlaybutton {...}</code> * REFERENCE
<code>\overlaycolor</code>
<code>\overlaydepth</code>
<code>\overlayfigure {...}</code> * FILE
<code>\overlayheight</code>

<code>\overlayimage {...}</code> *    FILE
<code>\overlaylinecolor</code>
<code>\overlaylinewidth</code>
<code>\overlayoffset</code>
<code>\overlayrollbutton [...] [...]</code> 1    REFERENCE 2    REFERENCE
<code>\overlaywidth</code>
<code>\overloaderror</code>
<code>\overset {...} {...}</code> 1    TEXT 2    TEXT
<code>\PDFcolor {...}</code> *    NAME
<code>\PDFETEX</code>
<code>\PDFTEX</code>
<code>\PICTEX</code>
<code>\PiCTeX</code>
<code>\PointsToBigPoints {...} \^...</code> 1    DIMENSION 2    CSNAME
<code>\PointsToReal {...} \^...</code> 1    DIMENSION 2    CSNAME
<code>\PointsToWholeBigPoints {...} \^...</code> 1    DIMENSION 2    CSNAME
<code>\PPCHTEX</code>
<code>\PPCHTeX</code>
<code>\PRAGMA</code>
<code>\PtToCm {...}</code> *    DIMENSION
<code>\pagearea [...] [...] [...]</code> 1    sus antet text sub <sub>OPT</sub> sub <sub>OPT</sub> 2    text margine bordura 3    stanga dreapta lefttext middletext righttext

<p><b>\pagebreak</b> [...,*,...]</p> <p>* gol antet subsof<sup>OPT</sup>dummy incadrat NUMMER +NUMMER implicit reset dezactivat da nu marcaj blank preferinta preferintamare stanga dreapta par impar cvadрупul ultim ultimpagina start stop NAME</p>
<p><b>\pagefigure</b> [...<sup>1</sup>.] [...,...<sup>2</sup>...]</p> <p>1 FILE <sup>OPT</sup></p> <p>2 offset = implicit overlay niciunul DIMENSION</p>
<p><b>\pageinjection</b> [...<sup>1</sup>.] [...,...<sup>2</sup>...]</p> <p>1 NAME <sup>OPT</sup> <sup>OPT</sup></p> <p>2 KEY = VALUE</p>
<p><b>\pageinjection</b> [...,...<sup>1</sup>...] [...,...<sup>2</sup>...]</p> <p>1 inherits: \setuppageinjection<sup>OPT</sup> <sup>OPT</sup></p> <p>2 KEY = VALUE</p>
<p><b>\pagestaterealpage</b> {...<sup>1</sup>.} {...<sup>2</sup>.}</p> <p>1 NAME</p> <p>2 NAME NUMMER</p>
<p><b>\pagestaterealpageorder</b> {...<sup>1</sup>.} {...<sup>2</sup>.}</p> <p>1 NAME</p> <p>2 NAME NUMMER</p>
<p><b>\pagina</b> [...,*,...]</p> <p>* inherits: \<sup>OPT</sup>pagebreak</p>
<p><b>\paletsize</b></p>
<p><b>\PARAGRAPHS</b></p>
<p><b>\pastreazablocuri</b> [...,<sup>1</sup>...] [...,<sup>2</sup>...]</p> <p>1 NAME <sup>OPT</sup></p> <p>2 NAME</p>
<p><b>\pdfactualtext</b> {...<sup>1</sup>.} {...<sup>2</sup>.}</p> <p>1 CONTENT</p> <p>2 TEXT</p>
<p><b>\pdfbackendactualtext</b> {...<sup>1</sup>.} {...<sup>2</sup>.}</p> <p>1 CONTENT</p> <p>2 TEXT</p>
<p><b>\pdfbackendcurrentresources</b></p>
<p><b>\pdfbackendsetcatalog</b> {...<sup>1</sup>.} {...<sup>2</sup>.}</p> <p>1 NAME</p> <p>2 TEXT</p>
<p><b>\pdfbackendsetcolorspace</b> {...<sup>1</sup>.} {...<sup>2</sup>.}</p> <p>1 NAME</p> <p>2 TEXT</p>
<p><b>\pdfbackendsettextgstate</b> {...<sup>1</sup>.} {...<sup>2</sup>.}</p> <p>1 NAME</p> <p>2 TEXT</p>
<p><b>\pdfbackendsetinfo</b> {...<sup>1</sup>.} {...<sup>2</sup>.}</p> <p>1 NAME</p> <p>2 TEXT</p>



<p><code>\pdfbackendsetname {...} {...}</code></p> <p>1 NAME</p> <p>2 TEXT</p>
<p><code>\pdfbackendsetpageattribute {...} {...}</code></p> <p>1 NAME</p> <p>2 TEXT</p>
<p><code>\pdfbackendsetpageresource {...} {...}</code></p> <p>1 NAME</p> <p>2 TEXT</p>
<p><code>\pdfbackendsetpagesattribute {...} {...}</code></p> <p>1 NAME</p> <p>2 TEXT</p>
<p><code>\pdfbackendsetpattern {...} {...}</code></p> <p>1 NAME</p> <p>2 TEXT</p>
<p><code>\pdfbackendsetshade {...} {...}</code></p> <p>1 NAME</p> <p>2 TEXT</p>
<p><code>\pdfcolor {...}</code></p> <p>* NAME</p>
<p><code>\pdfeTeX</code></p>
<p><code>\pdfTeX</code></p>
<p><code>\pelung {...}</code></p> <p>* NAME</p>
<p><code>\percent</code></p>
<p><code>\percentdimen {...} {...}</code></p> <p>1 DIMENSION CSNAME</p> <p>2 DIMENSION NUMBER</p>
<p><code>\permitcaretescape</code></p>
<p><code>\permitcircumflexescape</code></p>
<p><code>\permitspacesbetweengroups</code></p>
<p><code>\persiandecimals {...}</code></p> <p>* NUMMER</p>
<p><code>\persiannumerals {...}</code></p> <p>* NUMMER</p>
<p><code>\phantom {...}</code></p> <p>* CONTENT</p>

```
*  latime      =  DIMENSION
   inaltime   =  DIMENSION
   inaltime   =  DIMENSION
```

1	BEFEHL
2	BEFEHL
3	BEFEHL

```
1 NAME                                OPT                OPT
2 inherits: \setupbtxrendering
```

## \* REFERENCE

\* CONTENT

```

1 SINGULAR                                OPT      OPT
2 split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin marginestanga
  marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime
  adancime [--]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine
  [--]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva
  effective antet subsol
3 REFERENCE
4 TEXT
5 CONTENT

```

```

1  NAME                                OPT      OPT
2  split totdeauna stanga dreapta intern extern spatiuspace cutspace instanga indreapta inmargin marginestanga
   marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime
   adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine
   [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva
   effective antet subsol
3  REFERENCE
4  TEXT
5  CONTENT

```

instances: chemical figure table intermezzo graphic

`\punechemical [...,1...] [...,2...] {...} {...}`

1 split totdeauna stangă<sup>OPT</sup> dreapta<sup>OPT</sup> intern extern spatiuspace cutspace instanga indreapta inmargin marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol

2 REFERENCE

3 TEXT

4 CONTENT

`\punefigure [...,1...] [...,2...] {...} {...}`

1 split totdeauna stangă<sup>OPT</sup> dreapta<sup>OPT</sup> intern extern spatiuspace cutspace instanga indreapta inmargin marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol

2 REFERENCE

3 TEXT

4 CONTENT

`\punegraphic [...,1...] [...,2...] {...} {...}`

1 split totdeauna stangă<sup>OPT</sup> dreapta<sup>OPT</sup> intern extern spatiuspace cutspace instanga indreapta inmargin marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol

2 REFERENCE

3 TEXT

4 CONTENT

`\puneintermezzo [...,1...] [...,2...] {...} {...}`

1 split totdeauna stangă<sup>OPT</sup> dreapta<sup>OPT</sup> intern extern spatiuspace cutspace instanga indreapta inmargin marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol

2 REFERENCE

3 TEXT

4 CONTENT

`\punetable [...,1...] [...,2...] {...} {...}`

1 split totdeauna stangă<sup>OPT</sup> dreapta<sup>OPT</sup> intern extern spatiuspace cutspace instanga indreapta inmargin marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol

2 REFERENCE

3 TEXT

4 CONTENT

`\placeframed [...]1 [...,2...] {...}`

1 NAME<sup>OPT</sup>

2 inherits: \setezainconjurat

3 CONTENT

`\placeheadnumber [...]`

\* ABSCHNITT

`\placeheadtext [...]`

\* ABSCHNITT

`\placehelp`

`\placeinitial [...]`

\* NAME<sup>OPT</sup>

`\placelayer [...]`

\* NAME

$\backslash\text{placelayeredtext}$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sup>*</sup> ...] <sub>OPT</sub> [ <sup>3</sup> ... <sup>*</sup> ...] <sub>OPT</sub> { <sup>4</sup> ...} { <sup>5</sup> ...} 1 NAME 2 inherits: \setuplayer 3 inherits: \setuplayeredtext 4 TEXT 5 CONTENT
$\backslash\text{placelistofFLOATS}$ [ <sup>*</sup> ... <sup>*</sup> ...] <sub>OPT</sub> * inherits: \seteazalista instances: chemicals figures tables intermezzi graphics
$\backslash\text{placelistofchemicals}$ [ <sup>*</sup> ... <sup>*</sup> ...] <sub>OPT</sub> * inherits: \seteazalista
$\backslash\text{placelistoffigures}$ [ <sup>*</sup> ... <sup>*</sup> ...] <sub>OPT</sub> * inherits: \seteazalista
$\backslash\text{placelistofgraphics}$ [ <sup>*</sup> ... <sup>*</sup> ...] <sub>OPT</sub> * inherits: \seteazalista
$\backslash\text{placelistofintermezzi}$ [ <sup>*</sup> ... <sup>*</sup> ...] <sub>OPT</sub> * inherits: \seteazalista
$\backslash\text{placelistoftables}$ [ <sup>*</sup> ... <sup>*</sup> ...] <sub>OPT</sub> * inherits: \seteazalista
$\backslash\text{placelistofpublications}$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sup>*</sup> ...] <sub>OPT</sub> 1 NAME 2 inherits: \setupbtxrendering
$\backslash\text{placelistofsorts}$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sup>*</sup> ...] <sub>OPT</sub> 1 SINGULAR 2 inherits: \seteazasortare
$\backslash\text{placelistofSORTS}$ [ <sup>*</sup> ... <sup>*</sup> ...] <sub>OPT</sub> * inherits: \seteazasortare instances: logos
$\backslash\text{placelistoflogos}$ [ <sup>*</sup> ... <sup>*</sup> ...] <sub>OPT</sub> * inherits: \seteazasortare
$\backslash\text{placelistofsynonyms}$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sup>*</sup> ...] <sub>OPT</sub> 1 SINGULAR 2 inherits: \seteazasinonime
$\backslash\text{placelistofSYNONYMS}$ [ <sup>*</sup> ... <sup>*</sup> ...] <sub>OPT</sub> * inherits: \seteazasinonime instances: abbreviations
$\backslash\text{placelistofabbreviations}$ [ <sup>*</sup> ... <sup>*</sup> ...] <sub>OPT</sub> * inherits: \seteazasinonime
$\backslash\text{placelocalnotes}$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sup>*</sup> ...] <sub>OPT</sub> 1 NAME 2 inherits: \setupnote
$\backslash\text{placement}$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sup>*</sup> ...] <sub>OPT</sub> { <sup>3</sup> ...} 1 NAME 2 inherits: \setupplacement 3 CONTENT

$\backslash\text{PLACEMENT}$ [ $\dots$ , $\dots$ , $\overset{1}{=}\dots$ , $\dots$ ] { $\dots$ } 1 inherits: $\backslash\text{setupplacement}$ 2 CONTENT
$\backslash\text{placenamefloat}$ [ $\dots$ ] [ $\dots$ ] 1 NAME 2 REFERENCE
$\backslash\text{placenameformula}$ [ $\dots$ , $\dots$ , $\overset{1}{=}\dots$ , $\dots$ ] { $\dots$ } { $\overset{2}{=}\dots$ } { $\overset{3}{=}\dots$ } 1 + - REFERENCE OPT OPT 2 TEXT 3 TEXT
$\backslash\text{placenotes}$ [ $\dots$ , $\dots$ , $\overset{1}{=}\dots$ , $\dots$ ] [ $\dots$ , $\dots$ , $\overset{2}{=}\dots$ , $\dots$ ] 1 NAME OPT 2 inherits: $\backslash\text{setupnote}$
$\backslash\text{placepairedbox}$ [ $\dots$ ] [ $\dots$ , $\dots$ , $\overset{2}{=}\dots$ , $\dots$ ] { $\dots$ } { $\overset{3}{=}\dots$ } { $\overset{4}{=}\dots$ } 1 NAME OPT 2 inherits: $\backslash\text{setuppairedbox}$ 3 CONTENT 4 TEXT
$\backslash\text{punePAIREDBOX}$ [ $\dots$ , $\dots$ , $\overset{1}{=}\dots$ , $\dots$ ] { $\dots$ } { $\overset{2}{=}\dots$ } { $\overset{3}{=}\dots$ } 1 inherits: $\backslash\text{setuppairedbox}$ 2 CONTENT 3 TEXT instances: legend
$\backslash\text{punelegend}$ [ $\dots$ , $\dots$ , $\overset{1}{=}\dots$ , $\dots$ ] { $\dots$ } { $\overset{2}{=}\dots$ } { $\overset{3}{=}\dots$ } 1 inherits: $\backslash\text{setuppairedbox}$ 2 CONTENT 3 TEXT
$\backslash\text{placeparallel}$ [ $\dots$ ] [ $\dots$ , $\overset{2}{=}\dots$ , $\dots$ ] [ $\dots$ , $\dots$ , $\overset{3}{=}\dots$ , $\dots$ ] 1 NAME OPT 2 NAME 3 inherits: $\backslash\text{setupparallel}$
$\backslash\text{placerawlist}$ [ $\dots$ ] [ $\dots$ , $\dots$ , $\overset{2}{=}\dots$ , $\dots$ ] 1 LISTE OPT 2 inherits: $\backslash\text{seteazalista}$
$\backslash\text{placereadingwindow}$ [ $\dots$ ] [ $\dots$ ] 1 NAME OPT 2 NAME
$\backslash\text{plaseazapegrid}$ [ $\dots$ ] { $\dots$ } 1 normal standard da Strict tolerant sus subsol ambele broad ajustat primul ultim inalt unu jos niciunul linie strut box min max centru math math:linie math:jumatatelinie math:-line math:-halfline NAME 2 CONTENT
$\backslash\text{plaseazapegrid}$ [ $\dots$ , $\dots$ , $\overset{1}{=}\dots$ , $\dots$ ] { $\overset{2}{=}\dots$ } 1 inherits: $\backslash\text{definegrids}$ 2 CONTENT
$\backslash\text{plaseazasemnecarte}$ [ $\dots$ , $\dots$ , $\overset{1}{=}\dots$ , $\dots$ ] [ $\dots$ , $\dots$ , $\overset{2}{=}\dots$ , $\dots$ ] [ $\dots$ , $\dots$ , $\overset{3}{=}\dots$ , $\dots$ ] 1 ABSCHNITT LISTE OPT OPT OPT 2 ABSCHNITT LISTE 3 inherits: $\backslash\text{setupbookmark}$
$\backslash\text{popattribute}$ \.* * CSNAME

<p><code>\popmacro \*...</code></p> <p>* CSNAME</p>
<p><code>\popmode [...]</code></p> <p>* NAME</p>
<p><code>\popsystemmode {...}</code></p> <p>* NAME</p>
<p><code>\positionoverlay {...}</code></p> <p>* NAME</p>
<p><code>\positionregionoverlay {...} {...}</code></p> <p>1 NAME</p> <p>2 NAME</p>
<p><code>\postponenotes</code></p>
<p><code>\potrivestecamp [...]<sup>1</sup> [...,...<sup>2</sup>...,...]</code></p> <p>1 NAME</p> <p>2 inherits: \setupfieldbody</p>
<p><code>\pozitie [...,...<sup>1</sup>...,...]<sup>1</sup> (...,...<sup>2</sup>...) {...}<sup>3</sup></code></p> <p>1 inherits: \setarepozitie<sup>OPT</sup></p> <p>2 POSITION</p> <p>3 CONTENT</p>
<p><code>\predefinedfont [...]</code></p> <p>* FONT</p>
<p><code>\predefinefont [...]<sup>1</sup> [...]<sup>2</sup></code></p> <p>1 NAME</p> <p>2 FONT</p>
<p><code>\predefinesymbol [...]</code></p> <p>* NAME</p>
<p><code>\prefixedpagenumber</code></p>
<p><code>\prependetoks ... \to \<sup>2</sup>...</code></p> <p>1 BEFEHL</p> <p>2 CSNAME</p>
<p><code>\prependgvalue {...}<sup>1</sup> {...}<sup>2</sup></code></p> <p>1 NAME</p> <p>2 BEFEHL</p>
<p><code>\prependtocommalist {...}<sup>1</sup> \<sup>2</sup>...</code></p> <p>1 TEXT</p> <p>2 CSNAME</p>
<p><code>\prependtoks ... \to \<sup>2</sup>...</code></p> <p>1 BEFEHL</p> <p>2 CSNAME</p>
<p><code>\prependtoksonce ... \to \<sup>2</sup>...</code></p> <p>1 BEFEHL</p> <p>2 CSNAME</p>

<pre> \prependvalue {...} {...} 1 NAME 2 BEFEHL </pre>
<pre> \prerollblank [...,*...] * inherits: \blanc </pre>
<pre> \presetdocument [...,*...] * inherits: \setupdocument </pre>
<pre> \presetfieldsymbols [...,*...] * NAME </pre>
<pre> \presetLABELtext [...<sup>1</sup>...] [...<sup>2</sup>...] 1 SPRACHE OPT 2 KEY = VALUE instances: head label mathlabel taglabel unit operator prefix suffix btxlabel </pre>
<pre> \presetbtxlabeltext [...<sup>1</sup>...] [...<sup>2</sup>...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetheadtext [...<sup>1</sup>...] [...<sup>2</sup>...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetlabeltext [...<sup>1</sup>...] [...<sup>2</sup>...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetmathlabeltext [...<sup>1</sup>...] [...<sup>2</sup>...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetoperatortext [...<sup>1</sup>...] [...<sup>2</sup>...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetprefixtext [...<sup>1</sup>...] [...<sup>2</sup>...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetsuffixtext [...<sup>1</sup>...] [...<sup>2</sup>...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presettaglabeltext [...<sup>1</sup>...] [...<sup>2</sup>...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \presetunittext [...<sup>1</sup>...] [...<sup>2</sup>...] 1 SPRACHE OPT 2 KEY = VALUE </pre>
<pre> \pretocommalist {...<sup>1</sup>} {...<sup>2</sup>} 1 TEXT 2 CSNAME </pre>
<pre> \prettyprintbuffer {...<sup>1</sup>} {...<sup>2</sup>} 1 BUFFER 2 mp lua xml parsed-xml nested tex context niciunul NAME </pre>

<pre> \prevcounter [...] [<sup>1</sup>...] [<sup>2</sup>...] 1  NAME                      OPT 2  NUMMER </pre>
<pre> \prevcountervalue [...] *  NAME </pre>
<pre> \preventmode [...,*...] *  NAME </pre>
<pre> \prevrealpage </pre>
<pre> \prevrealpagenumber </pre>
<pre> \prevsubcountervalue [<sup>1</sup>...] [<sup>2</sup>...] 1  NAME 2  NUMMER </pre>
<pre> \prevsubpage </pre>
<pre> \prevsubpagenumber </pre>
<pre> \prevuserpage </pre>
<pre> \prevuserpagenumber </pre>
<pre> \primasubpagina </pre>
<pre> \procent </pre>
<pre> \proceseazabloc [...,<sup>1</sup>...] [...,<sup>2</sup>...] [...,<sup>3</sup>...] 1  NAME                      OPT          OPT 2  NAME 3  criteriu = text ABSCHNITT </pre>
<pre> \processaction [<sup>1</sup>...] [...,<sup>2</sup>=&gt;...] 1  BEFEHL 2  APPLY </pre>
<pre> \processallactionsinset [<sup>1</sup>...] [...,<sup>2</sup>=&gt;...] 1  BEFEHL 2  APPLY </pre>
<pre> \processassignlist [...,<sup>1</sup>...] \<sup>2</sup>... 1  TEXT 2  CSNAME </pre>
<pre> \processassignmentcommand [...,<sup>1</sup>...] \<sup>2</sup>... 1  KEY = VALUE 2  CSNAME </pre>
<pre> \processassignmentlist [...,<sup>1</sup>...] \<sup>2</sup>... 1  KEY = VALUE 2  CSNAME </pre>
<pre> \processbetween {<sup>1</sup>...} \<sup>2</sup>... 1  NAME 2  CSNAME </pre>



<pre> \processbodyfontenvironmentlist \*... * CSNAME </pre>
<pre> \processcolorcomponents {...} * COLOR </pre>
<pre> \processcommacommand [...,<sup>1</sup>...] \<sup>2</sup>... 1 BEFEHL 2 CSNAME </pre>
<pre> \processcommalist [...,<sup>1</sup>...] \<sup>2</sup>... 1 BEFEHL 2 CSNAME </pre>
<pre> \processcommalistwithparameters [...,<sup>1</sup>...] \<sup>2</sup>... 1 BEFEHL 2 CSNAME </pre>
<pre> \processcontent {...} \<sup>2</sup>... 1 NAME 2 CSNAME </pre>
<pre> \processfile {...} * FILE </pre>
<pre> \processfilemany {...} * FILE </pre>
<pre> \processfilenone {...} * FILE </pre>
<pre> \processfileonce {...} * FILE </pre>
<pre> \processfirstactioninset [...]<sup>1</sup> [...,...<sup>2</sup>...] 1 BEFEHL 2 APPLY </pre>
<pre> \processisolatedchars {...} \<sup>2</sup>... 1 TEXT 2 CSNAME </pre>
<pre> \processisolatedwords {...} \<sup>2</sup>... 1 TEXT 2 CSNAME </pre>
<pre> \processlinetablebuffer [...]<sup>*</sup> * BUFFER OPT </pre>
<pre> \processlinetablefile {...} * FILE </pre>
<pre> \processlist {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> \<sup>4</sup>... 1 CHARACTER 2 CHARACTER 3 TEXT 4 CSNAME </pre>
<pre> \processMPbuffer [...]<sup>*</sup>... * NAME OPT </pre>

<p><code>\processMPfigurefile {...}</code></p> <p>* FILE</p>
<p><code>\processmonth {...} {...} {...}</code></p> <p>1 NUMBER</p> <p>2 NUMBER</p> <p>3 BEFEHL</p>
<p><code>\processranges [...<sup>1</sup>,...] \<sup>2</sup>...</code></p> <p>1 NUMBER NUMBER:NUMBER</p> <p>2 CSNAME</p>
<p><code>\processseparatedlist [...<sup>1</sup>] [...<sup>2</sup>] {...<sup>3</sup>}</code></p> <p>1 TEXT</p> <p>2 TEXT</p> <p>3 CSNAME BEFEHL</p>
<p><code>\processTEXbuffer [...<sup>*</sup>]</code></p> <p>* BUFFER <small>OPT</small></p>
<p><code>\processtokens {...} {...} {...} {...} {...}</code></p> <p>1 BEFEHL</p> <p>2 BEFEHL</p> <p>3 BEFEHL</p> <p>4 BEFEHL</p> <p>5 TEXT</p>
<p><code>\processuntil \<sup>*</sup>...</code></p> <p>* CSNAME</p>
<p><code>\processxtablebuffer [...<sup>*</sup>]</code></p> <p>* NAME <small>OPT</small></p>
<p><code>\processyear {...} {...<sup>2</sup>} {...<sup>3</sup>} {...<sup>4</sup>}</code></p> <p>1 NUMBER</p> <p>2 BEFEHL</p> <p>3 BEFEHL</p> <p>4 BEFEHL</p>
<p><code>\produs [...<sup>*</sup>]</code></p> <p>* FILE</p>
<p><code>\produs \<sup>*</sup>...</code></p> <p>* FILE</p>
<p><code>\profiledbox [...<sup>1</sup>] [...<sup>2</sup>,...<sup>2</sup>,...] {...<sup>3</sup>}</code></p> <p>1 niciunul fixat strict halfixed quarterfixed eightsfixed NAME</p> <p>2 inherits: \setupprofile</p> <p>3 CONTENT</p>
<p><code>\profilegivenbox {...<sup>1</sup>} \<sup>2</sup>...</code></p> <p>1 niciunul fixat strict halfixed quarterfixed eightsfixed NAME</p> <p>2 CSNAME NUMBER</p>
<p><code>\program [...<sup>*</sup>]</code></p> <p>* NAME</p>
<p><code>\proiect [...<sup>*</sup>]</code></p> <p>* FILE</p>

<p><code>\proiect ...</code>  * FILE</p>
<p><code>\pseudoMixedCapped {...}</code>  * TEXT</p>
<p><code>\pseudoSmallCapped {...}</code>  * TEXT</p>
<p><code>\pseudoSmallcapped {...}</code>  * TEXT</p>
<p><code>\pseudosmallcapped {...}</code>  * TEXT</p>
<p><code>\puncte {...}</code>  * CHARACTER</p>
<p><code>\puncte [...]</code>  * NUMMER OPT</p>
<p><code>\puncte [...*...]</code>  * inherits: \setupperiods</p>
<p><code>\punedeasuprafiecareia {...} {...}</code>  1 CONTENT  2 CONTENT</p>
<p><code>\punefatainfata {...} {...}</code>  1 CONTENT  2 CONTENT</p>
<p><code>\puneformula [...<sup>1</sup>...] {...<sup>2</sup>}</code>  1 + - REFERENCE OPT OPT  2 TEXT</p>
<p><code>\punelista [...<sup>1</sup>...] [...<sup>2</sup>...]</code>  1 LISTE OPT  2 inherits: \seteazalista</p>
<p><code>\punelistacombinata [...<sup>1</sup>] [...<sup>2</sup>...]</code>  1 LISTE OPT  2 inherits: \seteazalistacombinata</p>
<p><code>\puneCOMBINEDLIST [...*...]</code>  * inherits: \seteazalistacombinata OPT  <b>instances: content</b></p>
<p><code>\punecontent [...*...]</code>  * inherits: \seteazalistacombinata OPT</p>
<p><code>\punenotesubsol [...*...]</code>  * inherits: \setupnote OPT</p>
<p><code>\punenotesubsollocale [...*...]</code>  * inherits: \setupnote OPT</p>
<p><code>\punenumarpagina</code></p>

<p><code>\puneregistru [...]</code> <code>[...<sup>2</sup>...]</code>  1 NAME OPT  2 inherits: \seteazaregistru</p>
<p><code>\puneREGISTER [...<sup>*</sup>...]</code>  * inherits: \seteazaregistru  instances: index</p>
<p><code>\puneindex [...<sup>*</sup>...]</code>  * inherits: \seteazaregistru</p>
<p><code>\punesubformula [...<sup>1</sup>...] {...<sup>2</sup>}</code>  1 + - REFERENCE OPT OPT  2 TEXT</p>
<p><code>\purenumber {...}</code>  * NUMMER</p>
<p><code>\pusharrangedpages ... \poparrangedpages</code></p>
<p><code>\pushattribute \...</code>  * CSNAME</p>
<p><code>\pushbar [...]</code> ... <code>\popbar</code>  * NAME</p>
<p><code>\pushbutton [...<sup>1</sup>] [...<sup>2</sup>]</code>  1 NAME  2 REFERENCE</p>
<p><code>\pushcatcodetable ... \popcatcodetable</code></p>
<p><code>\pushculoare [...]</code> ... <code>\popculoare</code>  * COLOR</p>
<p><code>\pushendofline ... \popendofline</code></p>
<p><code>\pushfundal [...]</code> ... <code>\popfundal</code>  * NAME</p>
<p><code>\pushindentation ... \popindentation</code></p>
<p><code>\pushMPdrawing ... \popMPdrawing</code></p>
<p><code>\pushmacro \...</code>  * CSNAME</p>
<p><code>\pushmathstyle ... \popmathstyle</code></p>
<p><code>\pushmode [...]</code>  * NAME</p>
<p><code>\pushoutputstream [...]</code>  * NAME OPT</p>
<p><code>\pushpath [...]</code> ... <code>\poppath</code>  * PATH</p>

<code>\pushpunctuation ... \poppunctuation</code>
<code>\pushrandomseed ... \poprandomseed</code>
<code>\pushreferenceprefix {...} ... \popreferenceprefix</code> <code>* + - TEXT</code>
<code>\pushsystemmode {...}</code> <code>* NAME</code>
<code>\putboxincache {...} {...} ...</code> <code>1 NAME</code> <code>2 NUMMER TEXT</code> <code>3 CSNAME NUMMER</code>
<code>\putnextboxincache {...} {...} \... {...}</code> <code>1 NAME</code> <code>2 NUMMER TEXT</code> <code>3 CSNAME</code> <code>4 CONTENT</code>
<code>\qqquad</code>
<code>\quad</code>
<code>\quads [...]</code> <code>* NUMMER <small>OPT</small></code>
<code>\quarterstrut</code>
<code>\quitcommalist</code>
<code>\quitprevcommalist</code>
<code>\quittypescriptscanning</code>
<code>\ReadFile {...}</code> <code>* FILE</code>
<code>\raggedbottom</code>
<code>\raggedcenter</code>
<code>\raggedleft</code>
<code>\raggedright</code>
<code>\raggedwidecenter</code>
<code>\raisebox {...} \... {...}</code> <code>1 DIMENSION</code> <code>2 CSNAME</code> <code>3 CONTENT</code>
<code>\randomizetext {...}</code> <code>* TEXT</code>

\randomnumber {...} {...} 1    NUMMER 2    NUMMER
\rawcounter [...] <sup>1</sup> [...] <sup>2</sup> 1    NAME                    OPT 2    NUMMER
\rawcountervalue [...] *    NAME
\rawdate [...,*] *    inherits: \datacurenta
\rawdoifelseinset {...} <sup>1</sup> {..., <sup>2</sup> ...} {...} <sup>3</sup> {...} <sup>4</sup> 1    TEXT 2    TEXT 3    TRUE 4    FALSE
\rawdoifinset {...} <sup>1</sup> {..., <sup>2</sup> ...} {...} <sup>3</sup> 1    TEXT 2    TEXT 3    TRUE
\rawdoifinsetelse {...} <sup>1</sup> {..., <sup>2</sup> ...} {...} <sup>3</sup> {...} <sup>4</sup> 1    TEXT 2    TEXT 3    TRUE 4    FALSE
\rawgetparameters [...] <sup>1</sup> [..., <sup>2</sup> ...] 1    TEXT 2    KEY = VALUE
\rawprocessaction [...] <sup>1</sup> [..., <sup>2</sup> ...>...] 1    BEFEHL 2    APPLY
\rawprocesscommacommand [...] <sup>1</sup> [...] \. <sup>2</sup> 1    BEFEHL 2    CSNAME
\rawprocesscommalist [...] <sup>1</sup> [...] \. <sup>2</sup> 1    BEFEHL 2    CSNAME
\rawstructurelistuservariable {...} *    KEY
\rawsubcountervalue [...] <sup>1</sup> [...] <sup>2</sup> 1    NAME 2    NUMMER
\rbox ... <sup>1</sup> {...} <sup>2</sup> 1    TEXT <sup>OPT</sup> 2    CONTENT
\readfile {...} <sup>1</sup> {...} <sup>2</sup> {...} <sup>3</sup> 1    FILE 2    TRUE 3    FALSE

<code>\readfixfile {<sup>1</sup>..} {<sup>2</sup>..} {<sup>3</sup>..} {<sup>4</sup>..}</code> 1    PATH 2    FILE 3    TRUE 4    FALSE
<code>\readjobfile {<sup>1</sup>..} {<sup>2</sup>..} {<sup>3</sup>..}</code> 1    FILE 2    TRUE 3    FALSE
<code>\readlocfile {<sup>1</sup>..} {<sup>2</sup>..} {<sup>3</sup>..}</code> 1    FILE 2    TRUE 3    FALSE
<code>\readsetfile {<sup>1</sup>..} {<sup>2</sup>..} {<sup>3</sup>..} {<sup>4</sup>..}</code> 1    PATH 2    FILE 3    TRUE 4    FALSE
<code>\readsysfile {<sup>1</sup>..} {<sup>2</sup>..} {<sup>3</sup>..}</code> 1    FILE 2    TRUE 3    FALSE
<code>\readtexfile {<sup>1</sup>..} {<sup>2</sup>..} {<sup>3</sup>..}</code> 1    FILE 2    TRUE 3    FALSE
<code>\readxmlfile {<sup>1</sup>..} {<sup>2</sup>..} {<sup>3</sup>..}</code> 1    FILE 2    TRUE 3    FALSE
<code>\realpagenumber</code>
<code>\realSmallCapped {<sup>*</sup>..}</code> *    TEXT
<code>\realSmallcapped {<sup>*</sup>..}</code> *    TEXT
<code>\realsmallcapped {<sup>*</sup>..}</code> *    TEXT
<code>\recursedepth</code>
<code>\recurselevel</code>
<code>\recursestring</code>
<code>\redoconvertfont</code>
<code>\ref [<sup>1</sup>..] [<sup>2</sup>..]</code> 1    implicit text titlu numar pagina realpage 2    REFERENCE

<code>\REFERENCEFORMAT {...} {...} [...]</code> 1    TEXT                    OPT            OPT 2    TEXT 3    REFERENCE
<code>\referenceprefix</code>
<code>\referinta [...,<sup>1</sup>...] {..<sup>2</sup>.}</code> 1    REFERENCE 2    TEXT
<code>\referintapagina [...,*...]</code> *    REFERENCE
<code>\referintatext [...,<sup>1</sup>...] {..<sup>2</sup>.}</code> 1    REFERENCE 2    TEXT
<code>\referring (...,<sup>1</sup>...) (...,<sup>2</sup>...) [...<sup>3</sup>]</code> 1    POSITION 2    POSITION 3    REFERENCE
<code>\reflexie {...}</code> *    CONTENT
<code>\registerattachment [...<sup>1</sup>] [...,<sup>2</sup>...,...]</code> 1    NAME 2    inherits: \setupattachment
<code>\registerctxluafile {...} {..<sup>2</sup>.}</code> 1    FILE 2    NUMMER
<code>\registerexternalfigure [...<sup>1</sup>] [...<sup>2</sup>] [...,<sup>3</sup>...,...]</code> 1    FILE                                    OPT                    OPT 2    NAME 3    inherits: \setupexternalfigure
<code>\registerfontclass {...}</code> *    NAME
<code>\registerhyphenationexception [...<sup>1</sup>] [...<sup>2</sup>]</code> 1    SPRACHE                                    OPT 2    TEXT
<code>\registerhyphenationpattern [...<sup>1</sup>] [...<sup>2</sup>]</code> 1    SPRACHE                                    OPT 2    TEXT
<code>\registermenubuttons [...<sup>1</sup>] [...<sup>2</sup>]</code> 1    NAME 2    TEXT
<code>\registersort [...<sup>1</sup>] [...<sup>2</sup>]</code> 1    SINGULAR 2    NAME
<code>\registersynonym [...<sup>1</sup>] [...<sup>2</sup>]</code> 1    SINGULAR 2    NAME



<pre> \registerunit [...] [...<sup>2</sup>...] 1  prefix unitate operator suffixe simbol packaged 2  KEY = VALUE </pre>
<pre> \REGISTER [...] {...<sup>2</sup>...} 1  TEXT PROCESSOR-&gt;TEXT 2  INDEX instances: index </pre>
<pre> \index [...] {...<sup>2</sup>...} 1  TEXT PROCESSOR-&gt;TEXT 2  INDEX </pre>
<pre> \REGISTER [...] {...<sup>2</sup>} {...<sup>3</sup>...} 1  TEXT PROCESSOR-&gt;TEXT 2  TEXT 3  INDEX instances: index </pre>
<pre> \index [...] {...<sup>2</sup>} {...<sup>3</sup>...} 1  TEXT PROCESSOR-&gt;TEXT 2  TEXT 3  INDEX </pre>
<pre> \regular </pre>
<pre> \relatemarking [...] [...<sup>2</sup>] 1  BESCHRIFTUNG 2  BESCHRIFTUNG </pre>
<pre> \relateparameterhandlers {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>} {...<sup>4</sup>} 1  NAME 2  NAME 3  NAME 4  NAME </pre>
<pre> \relaxvalueifundefined {...} *  NAME </pre>
<pre> \remainingcharacters </pre>
<pre> \remarca (...<sup>1</sup>,...) (...<sup>2</sup>,...) [...<sup>3</sup>...<sup>3</sup>...] {...<sup>4</sup>} 1  POSITION 2  POSITION 3  inherits: \seteazainconjurat 4  TEXT </pre>
<pre> \removebottomthings </pre>
<pre> \removedepth </pre>
<pre> \removefromcommalist {...<sup>1</sup>} \...<sup>2</sup> 1  TEXT 2  CSNAME </pre>
<pre> \removelastskip </pre>
<pre> \removelastspace </pre>
<pre> \removemarkedcontent [...<sup>*</sup>] *  NAME </pre>

<code>\removepunctuation</code>
<code>\removesubstring <sup>1</sup>... \from <sup>2</sup>... \to <sup>3</sup>...</code> 1 TEXT 2 TEXT 3 CSNAME
<code>\removetoks <sup>1</sup>... \from <sup>2</sup>...</code> 1 BEFEHL 2 CSNAME
<code>\removeunwantedspaces</code>
<code>\replacefeature [...]</code> * NAME
<code>\replacefeature {...}</code> * NAME
<code>\replaceincommalist <sup>1</sup>... {<sup>2</sup>...}</code> 1 CSNAME 2 NUMMER
<code>\replaceword [<sup>1</sup>...] [<sup>2</sup>] [<sup>3</sup>]</code> 1 NAME 2 TEXT 3 TEXT
<code>\rescan {...}</code> * CONTENT
<code>\rescanwithsetup {<sup>1</sup>...} {<sup>2</sup>...}</code> 1 NAME 2 CONTENT
<code>\resetallattributes</code>
<code>\resetandaddfeature [...]</code> * NAME
<code>\resetandaddfeature {...}</code> * NAME
<code>\resetbar</code>
<code>\resetboxesincache {...}</code> * NAME
<code>\resetbreakpoints</code>
<code>\resetbuffer [...]</code> * BUFFER
<code>\resetcharacteralign</code>
<code>\resetcharacterkerning</code>
<code>\resetcharacterspacing</code>

<code>\resetcharacterstripping</code>
<code>\resetcollector [...]</code> *   NAME
<code>\resetcounter [...] [...]</code> 1   NAME                   OPT 2   NUMMER
<code>\resetdigitsmanipulation</code>
<code>\resetdirection</code>
<code>\reseteazamarcaje [...]</code> *   BESCHRIFTUNG
<code>\resetfeature</code>
<code>\resetflag {...}</code> *   NAME
<code>\resetfontcolorscheme</code>
<code>\resetfontfallback [...] [...]</code> 1   NAME                   OPT 2   FONT
<code>\resetfontsolution</code>
<code>\resethyphenationfeatures</code>
<code>\resetinjector [...]</code> *   NAME
<code>\resetinteractionmenu [...]</code> *   NAME
<code>\resetitaliccorrection</code>
<code>\resetlayer [...]</code> *   NAME
<code>\resetlocalfloats</code>
<code>\resetMPdrawing</code>
<code>\resetMPenvironment</code>
<code>\resetMPinstance [...]</code> *   NAME
<code>\resetmarker [...]</code> *   NAME
<code>\resetmode {...}</code> *   NAME

\resetpagenumber
\resetparallel [...] <sup>1</sup> [..., <sup>2</sup> ...] 1 NAME OPT 2 NAME tot
\resetpath
\resetpenalties \.*. * CSNAME
\resetperiodkerning
\resetprofile
\resetrecurselevel
\resetreference [...] * NAME
\resetreplacement
\resetscript
\resetsetups [...] * NAME
\resetshownsynonyms [...] * SINGULAR
\resetsubpagenumber
\resetsymbolset
\resetssystemmode {...} * NAME
\resettimer
\resettokenlist [...] * NAME
\resettrackers
\resettrialtypesetting
\resetusedsortings [...] * SINGULAR
\resetusedsynonyms [...] * SINGULAR
\resetuserpagenumber

\resetvalue {...} *   NAME
\resetvisualizers
\reshapebox {...} *   BEFEHL
\resolvedglyphdirect {...} {...} 1   FONT 2   e:NAME x:NUMMER d:NUMMER s:NUMMER i:NUMMER n:NAME c:NAME u:NAME a:NAME
\resolvedglyphstyled {...} {...} 1   FONT 2   e:NAME x:NUMMER d:NUMMER s:NUMMER i:NUMMER n:NAME c:NAME u:NAME a:NAME
\restartcounter [...] [...] [...] 1   NAME                           OPT 2   NUMMER 3   NUMMER
\restorebox {...} {...} 1   NAME 2   NAME
\restorecatcodes
\restorecounter [...] *   NAME
\restorecurrentattributes {...} *   NAME
\restoreendofline
\restoreglobalbodyfont
\reusableMPgraphic {...} {...}... <sup>2</sup> ... 1   NAME                           OPT 2   KEY   =   VALUE
\reuseMPgraphic {...} {...}... <sup>2</sup> ... 1   NAME                           OPT 2   KEY   =   VALUE
\reuserandomseed
\revivefeature
\rfence {...} *   CHARACTER
\rhbox {...} *   CONTENT
\rightbottombox {...} *   CONTENT

$\backslash\mathrm{rightbox}\{...\}$ *    CONTENT
$\backslash\mathrm{righthbox}\{...\}$ *    CONTENT
$\backslash\mathrm{rightLABELtext}\{...\}$ *    KEY instances: head label mathlabel
$\backslash\mathrm{rightheadtext}\{...\}$ *    KEY
$\backslash\mathrm{rightlabeltext}\{...\}$ *    KEY
$\backslash\mathrm{rightmathlabeltext}\{...\}$ *    KEY
$\backslash\mathrm{rightline}\{...\}$ *    CONTENT
$\backslash\mathrm{rightorleftpageaction}\{...\}^1\{...\}^2$ 1    BEFEHL 2    BEFEHL
$\backslash\mathrm{rightpageorder}$
$\backslash\mathrm{rightskipadaption}$
$\backslash\mathrm{rightsubguillemot}$
$\backslash\mathrm{righttopleft}$
$\backslash\mathrm{righttopleftthbox}\{...\}^1\{...\}^2$ 1    TEXT                    OPT 2    CONTENT
$\backslash\mathrm{righttopleftvbox}\{...\}^1\{...\}^2$ 1    TEXT                    OPT 2    CONTENT
$\backslash\mathrm{righttopleftvtop}\{...\}^1\{...\}^2$ 1    TEXT                    OPT 2    CONTENT
$\backslash\mathrm{righttopbox}\{...\}$ *    CONTENT
$\backslash\mathrm{riglertext}\{...\}^1\{...\}^2$ 1    sus centru subSol    OPT 2    TEXT
$\backslash\mathrm{rigleumplere}\{...\}^1\{...\}^2\{...\}^3$ 1    inherits: \seteazarigleumplere    OPT    OPT 2    TEXT 3    TEXT

<code>\ring {...}</code> * CHARACTER
<code>\rlap {...}</code> * CONTENT
<code>\robustaddtocommalist {...} \^{2..}</code> 1 TEXT 2 CSNAME
<code>\robustdoifelseinset {...} {...^{2..},...} {...^{3..}} {...^{4..}}</code> 1 TEXT 2 TEXT 3 TRUE 4 FALSE
<code>\robustdoifinsetelse {...} {...^{2..},...} {...^{3..}} {...^{4..}}</code> 1 TEXT 2 TEXT 3 TRUE 4 FALSE
<code>\robustpretocommalist {...} \^{2..}</code> 1 TEXT 2 CSNAME
<code>\rollbutton [...^{1..},...^{2..}] \^{3..} [...^{3..}]</code> 1 inherits: \setupbutton 2 TEXT 3 REFERENCE
<code>\rollbutton [...^{1..}] [...^{1..},...^{2..},...^{3..}] \^{4..} [...^{4..}]</code> 1 NAME OPT OPT 2 inherits: \seteazameniuiinteractiune 3 TEXT 4 REFERENCE
<code>\roman</code>
<code>\roteste [...^{1..},...^{2..}] {...^{2..}}</code> 1 inherits: \seteazameniuiinteractiune 2 CONTENT
<code>\rtop \^{1..} {...^{2..}}</code> 1 TEXT OPT 2 CONTENT
<code>\ruby [...^{1..}] {...^{2..}} {...^{3..}}</code> 1 NAME OPT 2 TEXT 3 TEXT
<code>\ruledhbox \^{1..} {...^{2..}}</code> 1 TEXT OPT 2 CONTENT
<code>\ruledhpack \^{1..} {...^{2..}}</code> 1 TEXT OPT 2 CONTENT
<code>\ruledmbox {...}</code> * CONTENT

$\backslash\text{ruledtopv}$ $\overset{1}{...}$ $\{\overset{2}{...}\}$ 1    TEXT            OPT 2    CONTENT
$\backslash\text{ruledtpack}$ $\overset{1}{...}$ $\{\overset{2}{...}\}$ 1    TEXT            OPT 2    CONTENT
$\backslash\text{ruledvbox}$ $\overset{1}{...}$ $\{\overset{2}{...}\}$ 1    TEXT            OPT 2    CONTENT
$\backslash\text{ruledvpack}$ $\overset{1}{...}$ $\{\overset{2}{...}\}$ 1    TEXT            OPT 2    CONTENT
$\backslash\text{ruledvtop}$ $\overset{1}{...}$ $\{\overset{2}{...}\}$ 1    TEXT            OPT 2    CONTENT
$\backslash\text{runMPbuffer}$ $[...,...]^*$ *    NAME            OPT
$\backslash\text{runninghbox}$ $\{...\}^*$ *    CONTENT
$\backslash\text{ScaledPointsToBigPoints}$ $\{\overset{1}{...}\} \backslash\overset{2}{...}$ 1    DIMENSION 2    CSNAME
$\backslash\text{ScaledPointsToWholeBigPoints}$ $\{\overset{1}{...}\} \backslash\overset{2}{...}$ 1    DIMENSION 2    CSNAME
$\backslash\text{Smallcapped}$ $\{...\}^*$ *    TEXT
$\backslash\text{safechar}$ $\{...\}^*$ *    NUMMER
$\backslash\text{samplefile}$ $\{...\}^*$ *    FILE
$\backslash\text{sans}$
$\backslash\text{sansaldin}$
$\backslash\text{sansnormal}$
$\backslash\text{sansserif}$
$\backslash\text{savebox}$ $\{\overset{1}{...}\} \{\overset{2}{...}\} \{\overset{3}{...}\}$ 1    NAME 2    NAME 3    CONTENT



<pre> \savebtxdataset [...] [...] [...] [...] 1  NAME          OPT      OPT      OPT 2  FILE 3  dataset      = NAME    type         = bib lua xml    fisier       = FILE    criteriu     = tot text intro referinta curent aici precedent local componenta SECTIONBLOCK:tot SECTIONBLOCK:referinta                   SECTIONBLOCK:curent SECTIONBLOCK:precedent </pre>
<pre> \savebuffer [...] [...] *  lista      = NAME    fisier     = FILE    prefix     = da nu </pre>
<pre> \savebuffer [...] [...] 1  BUFFER 2  FILE </pre>
<pre> \savecounter [...] *  NAME </pre>
<pre> \saveculoare ... \restoreculoare </pre>
<pre> \savecurrentattributes {...} *  NAME </pre>
<pre> \savenormalmeaning \... *  CSNAME </pre>
<pre> \savetaggedtwopassdata {...} {...} {...} {...} 1  NAME 2  NUMMER 3  NAME 4  CONTENT </pre>
<pre> \savetwopassdata {...} {...} {...} 1  NAME 2  NUMMER 3  CONTENT </pre>
<pre> \sbox {...} *  CONTENT </pre>
<pre> \scala [...] [...] [...] [...] 1  NAME      OPT      OPT 2  inherits: \setupscale 3  CONTENT </pre>
<pre> \scriebuffer [...] [...] [...] 1  BUFFER      OPT      OPT 2  inherits: \seteazatyping </pre>
<pre> \typeBUFFER [...] [...] *  inherits: \seteazatyping </pre>
<pre> \scrieinlista [...] [...] [...] [...] 1  LISTE      OPT 2  inherits: \seteazalista 3  NUMMER 4  TEXT </pre>

<pre> \scrieintreliste [...] [...] <sup>2</sup> [...] <sup>3</sup> {} 1  LISTE 2  inherits: \seteazalista 3  BEFEHL </pre>
<pre> \SCRIPT instances: hangul hanzi nihongo ethiopic thai latin test </pre>
<pre> \ethiopic </pre>
<pre> \hangul </pre>
<pre> \hanzi </pre>
<pre> \latin </pre>
<pre> \nihongo </pre>
<pre> \test </pre>
<pre> \thai </pre>
<pre> \scrismanual </pre>
<pre> \secondoffivearguments {...} {...} {...} {...} {...} 1  TEXT 2  TEXT 3  TEXT 4  TEXT 5  TEXT </pre>
<pre> \secondoffourarguments {...} {...} {...} {...} 1  TEXT 2  TEXT 3  TEXT 4  TEXT </pre>
<pre> \secondofsixarguments {...} {...} {...} {...} {...} {...} 1  TEXT 2  TEXT 3  TEXT 4  TEXT 5  TEXT 6  TEXT </pre>
<pre> \secondofthreearguments {...} {...} {...} 1  TEXT 2  TEXT 3  TEXT </pre>
<pre> \secondofthreeunexpanded {...} {...} {...} 1  TEXT 2  TEXT 3  TEXT </pre>
<pre> \secondoftwoarguments {...} {...} 1  TEXT 2  TEXT </pre>

`\secondoftwounexpanded {...} {...}`

1 TEXT  
2 TEXT

`\SECTION [...,1...] {...}`

1 REFERENCE <sup>OPT</sup>  
2 TEXT

instances: part chapter section subsection subsubsection subsubsubsection subsubsubsubsection  
title subject subsubject subsubsubject subsubsubsubject subsubsubsubsubject

`\SECTION [...,*...,...]`

\* titlu = TEXT  
semncarte = TEXT  
marcaje = TEXT  
lista = TEXT  
referinta = REFERENCE  
numarpropriu = TEXT

instances: part chapter section subsection subsubsection subsubsubsection subsubsubsubsection  
title subject subsubject subsubsubject subsubsubsubject subsubsubsubsubject

`\chapter [...,*...,...]`

\* titlu = TEXT  
semncarte = TEXT  
marcaje = TEXT  
lista = TEXT  
referinta = REFERENCE  
numarpropriu = TEXT

`\part [...,*...,...]`

\* titlu = TEXT  
semncarte = TEXT  
marcaje = TEXT  
lista = TEXT  
referinta = REFERENCE  
numarpropriu = TEXT

`\section [...,*...,...]`

\* titlu = TEXT  
semncarte = TEXT  
marcaje = TEXT  
lista = TEXT  
referinta = REFERENCE  
numarpropriu = TEXT

`\subject [...,*...,...]`

\* titlu = TEXT  
semncarte = TEXT  
marcaje = TEXT  
lista = TEXT  
referinta = REFERENCE  
numarpropriu = TEXT

`\subsection [...,*...,...]`

\* titlu = TEXT  
semncarte = TEXT  
marcaje = TEXT  
lista = TEXT  
referinta = REFERENCE  
numarpropriu = TEXT

`\subsubject [...,*...,...]`

\* titlu = TEXT  
semncarte = TEXT  
marcaje = TEXT  
lista = TEXT  
referinta = REFERENCE  
numarpropriu = TEXT

`\subsubsection [...,.*,...]`

\* titlu = TEXT  
semncarte = TEXT  
marcaje = TEXT  
lista = TEXT  
referinta = REFERENCE  
numarpropriu = TEXT

`\subsubsubject [...,.*,...]`

\* titlu = TEXT  
semncarte = TEXT  
marcaje = TEXT  
lista = TEXT  
referinta = REFERENCE  
numarpropriu = TEXT

`\subsubsubsection [...,.*,...]`

\* titlu = TEXT  
semncarte = TEXT  
marcaje = TEXT  
lista = TEXT  
referinta = REFERENCE  
numarpropriu = TEXT

`\subsubsubsubject [...,.*,...]`

\* titlu = TEXT  
semncarte = TEXT  
marcaje = TEXT  
lista = TEXT  
referinta = REFERENCE  
numarpropriu = TEXT

`\subsubsubsubsection [...,.*,...]`

\* titlu = TEXT  
semncarte = TEXT  
marcaje = TEXT  
lista = TEXT  
referinta = REFERENCE  
numarpropriu = TEXT

`\subsubsubsubsubject [...,.*,...]`

\* titlu = TEXT  
semncarte = TEXT  
marcaje = TEXT  
lista = TEXT  
referinta = REFERENCE  
numarpropriu = TEXT

`\title [...,.*,...]`

\* titlu = TEXT  
semncarte = TEXT  
marcaje = TEXT  
lista = TEXT  
referinta = REFERENCE  
numarpropriu = TEXT

`\chapter [...,1...] {2...}`

1 REFERENCE OPT  
2 TEXT

`\SECTION [...,1...] {2...} {3...}`

1 REFERENCE OPT  
2 NUMMER  
3 TEXT

instances: part chapter section subsection subsubsection subsubsubsection subsubsubsubsection  
title subject subsubject subsubsubject subsubsubsubject subsubsubsubsubject

<code>\chapter [...,<sup>1</sup>...] {...} {...}</code> 1    REFERENCE <small>OPT</small> 2    NUMMER 3    TEXT
<code>\part [...,<sup>1</sup>...] {...} {...}</code> 1    REFERENCE <sup>PT</sup> 2    NUMMER 3    TEXT
<code>\section [...,<sup>1</sup>...] {...} {...}</code> 1    REFERENCE <small>OPT</small> 2    NUMMER 3    TEXT
<code>\subject [...,<sup>1</sup>...] {...} {...}</code> 1    REFERENCE <small>OPT</small> 2    NUMMER 3    TEXT
<code>\subsection [...,<sup>1</sup>...] {...} {...}</code> 1    REFERENCE <small>OPT</small> 2    NUMMER 3    TEXT
<code>\subsubject [...,<sup>1</sup>...] {...} {...}</code> 1    REFERENCE <small>OPT</small> 2    NUMMER 3    TEXT
<code>\subsubsection [...,<sup>1</sup>...] {...} {...}</code> 1    REFERENCE <small>OPT</small> 2    NUMMER 3    TEXT
<code>\subsubsubject [...,<sup>1</sup>...] {...} {...}</code> 1    REFERENCE <small>OPT</small> 2    NUMMER 3    TEXT
<code>\subsubsubsection [...,<sup>1</sup>...] {...} {...}</code> 1    REFERENCE <small>OPT</small> 2    NUMMER 3    TEXT
<code>\subsubsubsubject [...,<sup>1</sup>...] {...} {...}</code> 1    REFERENCE <small>OPT</small> 2    NUMMER 3    TEXT
<code>\subsubsubsubsection [...,<sup>1</sup>...] {...} {...}</code> 1    REFERENCE <small>OPT</small> 2    NUMMER 3    TEXT
<code>\subsubsubsubsubject [...,<sup>1</sup>...] {...} {...}</code> 1    REFERENCE <small>OPT</small> 2    NUMMER 3    TEXT
<code>\subsubsubsubsubsection [...,<sup>1</sup>...] {...} {...}</code> 1    REFERENCE <small>OPT</small> 2    NUMMER 3    TEXT
<code>\subsubsubsubsubsubject [...,<sup>1</sup>...] {...} {...}</code> 1    REFERENCE <small>OPT</small> 2    NUMMER 3    TEXT
<code>\title [...,<sup>1</sup>...] {...} {...}</code> 1    REFERENCE <small>OPT</small> 2    NUMMER 3    TEXT

<pre> \part [...<sup>1</sup>,...] {...<sup>2</sup>} 1  REFERENCE<sup>PT</sup> 2  TEXT </pre>
<pre> \section [...<sup>1</sup>,...] {...<sup>2</sup>} 1  REFERENCE<sup>OPT</sup> 2  TEXT </pre>
<pre> \subject [...<sup>1</sup>,...] {...<sup>2</sup>} 1  REFERENCE<sup>OPT</sup> 2  TEXT </pre>
<pre> \subsection [...<sup>1</sup>,...] {...<sup>2</sup>} 1  REFERENCE<sup>OPT</sup> 2  TEXT </pre>
<pre> \subsubject [...<sup>1</sup>,...] {...<sup>2</sup>} 1  REFERENCE<sup>OPT</sup> 2  TEXT </pre>
<pre> \subsubsection [...<sup>1</sup>,...] {...<sup>2</sup>} 1  REFERENCE<sup>OPT</sup> 2  TEXT </pre>
<pre> \subsubsubject [...<sup>1</sup>,...] {...<sup>2</sup>} 1  REFERENCE<sup>OPT</sup> 2  TEXT </pre>
<pre> \subsubsubsection [...<sup>1</sup>,...] {...<sup>2</sup>} 1  REFERENCE<sup>OPT</sup> 2  TEXT </pre>
<pre> \subsubsubsubject [...<sup>1</sup>,...] {...<sup>2</sup>} 1  REFERENCE<sup>OPT</sup> 2  TEXT </pre>
<pre> \subsubsubsubsection [...<sup>1</sup>,...] {...<sup>2</sup>} 1  REFERENCE<sup>OPT</sup> 2  TEXT </pre>
<pre> \subsubsubsubsubject [...<sup>1</sup>,...] {...<sup>2</sup>} 1  REFERENCE<sup>OPT</sup> 2  TEXT </pre>
<pre> \subsubsubsubsubsection [...<sup>1</sup>,...] {...<sup>2</sup>} 1  REFERENCE<sup>OPT</sup> 2  TEXT </pre>
<pre> \subsubsubsubsubsubject [...<sup>1</sup>,...] {...<sup>2</sup>} 1  REFERENCE<sup>OPT</sup> 2  TEXT </pre>
<pre> \title [...<sup>1</sup>,...] {...<sup>2</sup>} 1  REFERENCE<sup>OPT</sup> 2  TEXT </pre>
<pre> \veziREGISTER [...<sup>1</sup>] {...<sup>2</sup>.+...<sup>3</sup>} {...<sup>3</sup>} 1  TEXT PROCESSOR-&gt;TEXT 2  INDEX 3  TEXT PROCESSOR-&gt;TEXT <b>instances:</b> index </pre>
<pre> \veziindex [...<sup>1</sup>] {...<sup>2</sup>.+...<sup>3</sup>} {...<sup>3</sup>} 1  TEXT PROCESSOR-&gt;TEXT 2  INDEX 3  TEXT PROCESSOR-&gt;TEXT </pre>

```
\select {...} {...} {...} {...} {...} {...}
1  NAME          OPT      OPT      OPT      OPT      OPT
2  CONTENT
3  CONTENT
4  CONTENT
5  CONTENT
6  CONTENT
```

```
\selecteazablocuri [...,1...] [...,2...] [...,3...,...]
1  NAME          OPT      OPT
2  NAME
3  criteriu = text ABSCHNITT
```

```
\semncarte [...]1 {...}2
1  ABSCHNITT LISTE
2  TEXT
```

```
\serializecommalist [...,*,...]
*  BEFEHL
```

```
\serializedcommalist
```

```
\serif
```

```
\serifbold
```

```
\serifnormal
```

```
\setare [...]*
*  NAME
```

```
\setareitemization [...,1...] [...,2...,...]
1  NAME NAME:NUMMER OPT
2  inherits: \setupitemgroup
```

```
\setarelimba [...]1 [...,2...,...]
1  SPRACHE implicitOPT
2  implicit          = SPRACHE
   stare            = start stop
   data              = inherits: \datacurenta
   time              = inherits: \currenttime
   patterns          = FILE
   lefthyphenmin     = NUMMER
   righthyphenmin    = NUMMER
   lefthyphenchar    = NUMMER
   righthyphenchar   = NUMMER
   setups            = NAME
   spatiere          = broad impachetat
   font              = auto NAME
   bidi              = stanga dreapta l2r r2l
   text              = TEXT
   limittext         = TEXT
   hyphen            = TEXT
   compoundhyphen     = TEXT
   leftcompoundhyphen = TEXT
   rightcompoundhyphen = TEXT
   minicitatstanga   = BEFEHL
   minicitatdreapta  = BEFEHL
   citatstanga       = BEFEHL
   citatdreapta      = BEFEHL
   leftspeech        = BEFEHL
   rightspeech       = BEFEHL
   propozitiestanga  = BEFEHL
   middlespeech      = BEFEHL
   propozitiedreapta = BEFEHL
   midsentence       = BEFEHL
   subpropozitiestanga = BEFEHL
   subpropozitiedreapta = BEFEHL
   factor            = da nu
```

<pre> \setarepozie [..<sup>1</sup>...][...<sup>2</sup>...] 1  NAME          OPT 2  offset  = da nu     unite  = ex em pt in cm mm sp bp pc dd cc nc     stare  = start overlay     xoffset = DIMENSION     yoffset = DIMENSION     xstep   = absolut relativ     ystep   = absolut relativ     xscala  = NUMMER     yscala  = NUMMER     xfactor = NUMMER     yfactor = NUMMER     factor  = NUMMER     scala   = NUMMER </pre>
<pre> \setare {...} *  NAME </pre>
<pre> \setautopagestaterealpageno {...} *  NAME </pre>
<pre> \setbar [...] *  NAME </pre>
<pre> \setbigbodyfont </pre>
<pre> \setboxllx <sup>1</sup>... {<sup>2</sup>...} 1  CSNAME NUMMER 2  DIMENSION </pre>
<pre> \setboxlly <sup>1</sup>... {<sup>2</sup>...} 1  CSNAME NUMMER 2  DIMENSION </pre>
<pre> \setbreakpoints [...] *  reset NAME </pre>
<pre> \setbuffer [...] ... \endbuffer *  NAME </pre>
<pre> \setcapstrut </pre>
<pre> \setcatcodetable \*... *  CSNAME </pre>
<pre> \setcharacteralign {<sup>1</sup>...} {<sup>2</sup>...} 1  NUMMER 2  TEXT number-&gt;TEXT text-&gt;TEXT </pre>
<pre> \setcharacteraligndetail {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...} 1  NUMMER 2  TEXT number-&gt;TEXT text-&gt;TEXT 3  DIMENSION 4  DIMENSION </pre>
<pre> \setcharactercasing [...] *  reset CUVANT cuvânt Cuvânt Cuvinte majuscula Majuscula niciunul aleator mixed camel cap Cap </pre>
<pre> \setcharactercleaning [...] *  reset 1 </pre>



`\setcharacterkerning [..]`

```
*  reset NAME
```

`\setcharacterspacing [...]`

```
*  reset NAME
```

```
\setcharacterstripping [...]
```

```
* reset 1
```

`\setcharstrut {...}`

\* TEXT

```
\setcollector [...1.] [...,..2=..2,...]2 {...3.}3
```

1 NAME

```
2 inherits: \setupcollector
```

### 3 CONTENT

```
\setcolormodel1 [...]
```

```
*  black bw gri rgb cmyk tot niciunul
```

```
\setcounter [...] [.^2.] [...]
```

1 NAME

2 NUMMER

3 NUMMER

```
\setcounterown [..1..] [..2..] [..3..]
```

1 NAME

2 NUMMER

3 TEXT

```
\setcurrentfontclass {...}
```

\* NAME

```
\setdataset [...] [2.] [...3...]
```

1 NAME

2 NAME

3 KEY = VALUE

`\setdefaultpenalties`

`\setdigitsmanipulation [...]`

```
* reset NUMMER
```

```
\setdirection [...]
```

\* NUMMER

$$\backslash\mathrm{setdocumentargument}\{\ldots\}\{\ldots\}$$

1 NAME

1	NAME
2	TEXT

```
\setdocumentargumentdefault {...} {...}
```

1 NAME

1	NAME
2	TEXT

`\setdocumentfilename {...} {...}`

1 NUMMER

2 TEXT

`\setdummyparameter {...} {...}`

- 1 KEY
- 2 BEFEHL

`\seteazaaliniat [...,*...]`

- \* [-+]mic [-+]mediu [-+]mare niciunul nu nu primul urmatorul da totdeauna niciodata impar par normal reset toggle  
DIMENSION NAME

`\seteazaalinieria [...,*...]`

- \* broad larg subsol inaltime linie inalt jos lohi flushright flushleft centru da nu latime normal reset intern  
extern flushinner flushouter stanga dreapta center dezactivat ultim end paragraf lefttoright righttoleft l2r  
r2l tabelul lesshyphenation morehyphenation suspendat nothanging hz fullhz nohz despsilabe nedespsilabe tolerant  
foartetolerant dilatata extremestretch final 1\*final 2\*final 3\*final 4\*final more 1\*more 2\*more

`\seteazaantet [...]1 [...,...2...,...]`

- 1 text margine bordura
- 2 inherits: \setuplayouttext

`\seteazaaranjareapag [...,*...]`

- \* dezactivat oglindit douafete negativ 90 180 270 reset fundal normal 2\*16 2\*8 2\*4 2\*2 2\*\*2 2SIDE 2TOP 2UP 2DOWN  
2\*4\*2 2\*2\*4 2TOPSIDE 2\*8\*Z 2\*6\*Z 1\*8 1\*4 3SIDE TRYPTICHON ZFLYER-8 ZFLYER-10 ZFLYER-12 MAPFLYER-12 DOUBLEWINDOW  
1\*2-Conference 1\*4-Conference 2\*2\*2 2\*2\*3 XY NAME

```

\setezaaspect [...]1 [...]2 [...]
1  NAME OPT
2  stare = start stop normal repetat
    margine = DIMENSION
    bordura = DIMENSION
    distantamargine = DIMENSION
    distantabordura = DIMENSION
    distantabordurastanga = DIMENSION
    distantacoltdreapta = DIMENSION
    distantamarginestanga = DIMENSION
    distantamarginedreapta = DIMENSION
    distantasus = DIMENSION
    distantaantet = DIMENSION
    distantasubsol = DIMENSION
    distantajos = DIMENSION
    preset = NAME
    marginestanga = DIMENSION
    marginedreapta = DIMENSION
    bordurastanga = DIMENSION
    borduradreapta = DIMENSION
    antet = DIMENSION
    subsol = DIMENSION
    sus = DIMENSION
    jos = DIMENSION
    spatiuspate = DIMENSION
    spatiusus = DIMENSION
    setups = NAME
    cutspace = DIMENSION
    latime = DIMENSION centru ajustat
    spatiujos = DIMENSION
    linii = NUMMER
    inaltime = DIMENSION centru ajustat
    offsetoriz = DIMENSION
    veroffset = DIMENSION
    coloane = NUMMER
    distantacoloane = DIMENSION
    metoda = implicit normal NAME
    locatie = stanga centru dreapta sus subsol ofata douafete
    latimetext = DIMENSION
    inaltimetext = DIMENSION
    nx = NUMMER
    ny = NUMMER
    dx = DIMENSION
    dy = DIMENSION
    scala = NUMMER
    sx = NUMMER
    sy = NUMMER
    marcaje = on dezactivat pagina gol culoare unu doi patru
    grid = da nu dezactivat
    textdistance = DIMENSION
    alternativ = implicit normal marcaj NAME
    clipoffset = DIMENSION
    cropoffset = DIMENSION auto
    trimoffset = DIMENSION
    bleedoffset = DIMENSION
    artoffset = DIMENSION

```

```

\setezaaspect [...]
* reset NAME

```

```

\seteazabarainteractiune [...]1 [...]2 [...]
1  NAME OPT
2  alternativ = a b c d e f g
    stare = start stop
    comanda = CSNAME
    latime = DIMENSION
    inaltime = DIMENSION max broad
    inaltime = DIMENSION max
    distanta = DIMENSION
    pas = mic mediu mare
    culoarefundal = COLOR
    stil = STYLE BEFEHL
    culoare = COLOR
    culoarecontrast = COLOR
    simbol = da nu
    inherits: \seteazainconjurat

```

**\seteazablanc** [...,\*,...]

\* inherits: \blanc OPT

**\seteazabloc** [...,<sup>1</sup>,...] [...,..<sup>2</sup>...,...]

1 NAME OPT  
2 inainte = BEFEHL  
dupa = BEFEHL  
stanga = BEFEHL  
dreapta = BEFEHL  
alternativ = paragraf text  
intern = BEFEHL  
setups = NAME  
alinieri = stanga dreapta centru flushleft flushright intern extern  
stil = STYLE BEFEHL  
culoare = COLOR

**\seteazablocsectione** [...,<sup>1</sup>,...] [...,..<sup>2</sup>...,...]

1 NAME OPT  
2 pagina = inherits: \pagina  
inainte = BEFEHL  
dupa = BEFEHL  
numar = da nu

**\seteazabuffer** [...,<sup>1</sup>,...] [...,..<sup>2</sup>...,...]

1 BUFFER OPT  
2 inainte = BEFEHL  
dupa = BEFEHL  
strip = da nu

**\seteazacamp** [...,<sup>1</sup>...] [...,..<sup>2</sup>,...] [...,..<sup>3</sup>...,...] [...,..<sup>4</sup>...,...] [...,..<sup>5</sup>...,...]

1 NAME OPT  
2 reset eticheta incadrat orizontal vertical  
3 inherits: \setupfieldtotalframed  
4 inherits: \setupfieldlabelframed  
5 inherits: \setupfieldcontentframed

**\seteazacampuri** [...,<sup>1</sup>,...] [...,..<sup>2</sup>...,...] [...,..<sup>3</sup>...,...] [...,..<sup>4</sup>...,...]

1 reset eticheta incadrat<sup>OPT</sup> orizontal vertical<sup>OPT</sup>  
2 inherits: \setupfieldtotalframed  
3 inherits: \setupfieldlabelframed  
4 inherits: \setupfieldcontentframed

**\seteazaclipping** [...,..<sup>\*</sup>...,...]

\* stare = start stop  
latime = DIMENSION  
inaltime = DIMENSION  
hoffset = DIMENSION  
voffset = DIMENSION  
x = NUMMER  
y = NUMMER  
nx = NUMMER  
ny = NUMMER  
sx = NUMMER  
sy = NUMMER  
offsetstanga = DIMENSION  
offsetdreapta = DIMENSION  
offsetsus = DIMENSION  
offsetjos = DIMENSION  
mp = NAME  
n = NUMMER  
offset = DIMENSION

\seteazacoloane [...,\*=...,...]

\* n = NUMMER  
distanta = DIMENSION  
optiune = fundal  
offset = DIMENSION  
comanda = \...##1  
inaltime = DIMENSION  
directie = stanga dreapta  
balanta = da nu  
aliniere = inherits: \  
toleranta = inherits: \  
blanc = inherits: \blanc  
nsus = NUMMER  
rigla = on dezactivat BEFEHL

\seteazacommentariu [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

1 NAME OPT  
2 stare = start stop niciunul  
metoda = normal ascuns  
simbol = Comment Ajutor Insert Cheie Newparagraph Note Paragraf Default  
latime = ajustat DIMENSION  
inaltime = ajustat DIMENSION  
inaltime = ajustat DIMENSION  
titlu = TEXT  
subtitlu = TEXT  
autor = TEXT  
nx = NUMMER  
ny = NUMMER  
culoare = COLOR  
optiune = xml max  
textlayer = NAME  
locatie = bordurastanga borduradreapta inmarginestanga marginedreapta text inalt niciunul  
distanta = DIMENSION  
spatiu = da  
buffer = BUFFER

\seteazacommentariupagina [...,\*=...,...]

\* locatie = stanga dreapta sus subsol niciunul  
stare = start stop niciunul  
offset = DIMENSION  
distanta = DIMENSION  
latime = DIMENSION  
inaltime = DIMENSION

\seteazaculoare [...]

\* FILE

\seteazaculori [...,\*=...,...]

\* stare = start stop  
spot = da nu  
expansiune = da nu  
factor = da nu  
rgb = da nu  
cmyk = da nu  
conversie = da nu totdeauna  
pagecolormodel = auto niciunul NAME  
culoaretext = COLOR  
intent = overprint knockout niciunul

`\seteazadimensiunihartie [...1,...] [...2,...]`

```
1  NAME                      OPT
2  sus                      = BEFEHL
   jos                      = BEFEHL
   stanga                   = BEFEHL
   dreapta                  = BEFEHL
   metoda                   = normal niciunul NAME
   scala                    = NUMMER
   nx                       = NUMMER
   ny                       = NUMMER
   dx                       = DIMENSION
   dy                       = DIMENSION
   latime                   = DIMENSION
   inaltime                 = DIMENSION
   spatiusus                = DIMENSION
   spatiuspate              = DIMENSION
   offset                   = DIMENSION
   pagina                   = reset vedere oglindit negativ rotat 90 180 270 NAME
   hartie                   = reset vedere oglindit negativ rotat 90 180 270 NAME
   optiune                  = ajustat max
   distanta                 = DIMENSION
```

`\seteazadimensiunihartie [...1,...] [...2,...]`

```
1  reset vedere oglindit negativ rotat 90 180 270OPTNAME
2  reset vedere oglindit negativ rotat 90 180 270 NAME
```

`\seteazaecraninteractiune [...*,...]`

```
*  latime                   = ajustat max tight DIMENSION
   inaltime                 = ajustat max tight DIMENSION
   spatiuspate              = DIMENSION
   offsetoriz               = DIMENSION
   veroffset                = DIMENSION
   spatiusus                = DIMENSION
   optiune                  = ajustat max ofata douafete semncarte auto niciunul implicit fixat vedere portrait pagina foaie
                             attachment layer titlu
   copies                   = NUMMER
   print                    = LISTE
   intarziere               = niciunul NUMMER
```

`\seteazaelemente [...1,...] [...2,...]`

```
1  NAME                      OPT
2  alternativ                = stanga dreapta sus subsol inmarginie
   latimetext               = DIMENSION
   latime                   = DIMENSION
   distanta                 = DIMENSION
   simbol                   = niciunul NAME
   aliniere                 = stanga centru dreapta flushleft flushright intern extern margine
   textalign                = stanga centru dreapta flushleft flushright intern extern
   n                        = NUMMER
   inainte                  = BEFEHL
   dupa                     = BEFEHL
   intre                    = BEFEHL
```

`\seteazaenumerare [...1,...] [...2,...]`

```
1  NAME                      OPT
2  inherits: \setupenumeration
```

```

\seteazafloat [...1,...] [...2,...]
1 SINGULAR OPT
2 aliniaturmator = da nu auto
implicit = inherits: \placefloat
fallback = inherits: \placefloat
intern = BEFEHL
criteriu = DIMENSION
metoda = NUMMER
sidemethod = NUMMER
textmethod = NUMMER
sidealign = inaltime adancime linie jumatatelinie grila normal
grid = inherits: \snaptogrid
local = da nu
comanda = \...##1
availablewidth = DIMENSION
availableheight = DIMENSION
latimeminima = DIMENSION
latimemaxima = DIMENSION
locatie = stanga dreapta centru flushleft flushright center max intern extern innermargin outermargin
inneredge outeredge spatuspace cutspace marginestanga marginedreapta borduradreapta
borduradreapta
distantamarginestanga = DIMENSION
distantamarginedreapta = DIMENSION
marginestanga = DIMENSION
marginedreapta = DIMENSION
innermargin = DIMENSION
outermargin = DIMENSION
bottombefore = BEFEHL
bottomafter = BEFEHL
expansiune = da nu xml
referenceprefix = + - TEXT
xmlsetup = NAME
catcodes = NAME
freeregion = da nu
spatiuinainte = niciunul inherits: \blanc
spatiudupa = niciunul inherits: \blanc
latime = DIMENSION
inaltime = DIMENSION
offset = DIMENSION niciunul overlay
spatiulateralainte = niciunul inherits: \blanc
spatiulateraldupa = niciunul inherits: \blanc
spacebeforeside = niciunul inherits: \blanc
spaceafterside = niciunul inherits: \blanc
sidethreshold = old dimension
margine = DIMENSION
nsus = NUMMER
njos = NUMMER
pas = mic mediu mare linie adancime
nlinii = NUMMER
cache = da nu
inherits: \seteazainconjurat

```

```

\seteazafloats [...1,...] [...2,...]
1 SINGULAR OPT
2 inherits: \seteazafloat

```

```

\seteazafonttext [...*,...]
* DIMENSION NAME global OPTreset x xx mic mare script scriptscript rm ss tt hw cg roman serif regular sans sansserif
suport type teletype mono scrismanual caligrafic

```

```

\seteazaformulare [...*,...]
* metoda = XML HTML PDF
export = da nu

```

```

\seteazaformule [...1,...] [...2,...]
1 NAME OPT
2 inherits: \setupformula

```

`\seteazafundal [...,1...] [...,2...,...]`

1 NAME OPT  
2 stare = start stop  
offsetstanga = DIMENSION  
offsetdreapta = DIMENSION  
offsetsus = DIMENSION  
offsetjos = DIMENSION  
inainte = BEFEHL  
dupa = BEFEHL  
inherits: \seteazainconjurat

`\seteazafundaluri [...,1...] [...,2...] [...,3...,...]`

1 sus antet text subsol subsol OPT  
2 bordurastanga marginestanga text marginedreapta borduradreapta  
3 inherits: \seteazainconjurat

`\seteazafundaluri [...,1...] [...,2...,...]`

1 foaie pagina paginastanga<sup>OPT</sup>paginadreapta text ascuns  
2 stare = start stop  
inherits: \seteazainconjurat

`\seteazagrosimelinie [...]`

\* mic mediu mare DIMENSION

`\seteazaimpartireafloat [...,*...,...]`

\* inainte = BEFEHL  
dupa = BEFEHL  
intre = BEFEHL  
linii = auto NUMMER  
conversie = NAME



\seteazainconjurat [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```

1  NAME                      OPT
2  colt                      = rectangular rotund NUMMER
   coltframe                 = rectangular rotund NUMMER
   coltfundal                 = rectangular rotund NUMMER
   raza                      = DIMENSION
   razaframe                  = DIMENSION
   razafundal                 = DIMENSION
   inaltime                   = DIMENSION
   adancimeframe              = DIMENSION
   adancimefundal             = DIMENSION
   culoareframe               = COLOR
   framesus                   = on dezactivat mic NAME
   framejos                   = on dezactivat mic NAME
   framestanga                = on dezactivat mic NAME
   framedreapta               = on dezactivat mic NAME
   region                     = da nu
   grosimerigla               = DIMENSION
   offsetframe                = DIMENSION
   frame                      = on dezactivat overlay mic closed niciunul
   fundal                     = primplan culoare NAME
   offsetfundal               = incadrat DIMENSION
   component                  = NAME
   extras                     = BEFEHL
   foregroundstyle            = STYLE BEFEHL
   foregroundcolor             = COLOR
   setups                     = NAME
   offset                     = implicit overlay niciunul DIMENSION
   latime                     = local ajustat max broad fixat DIMENSION
   inaltime                   = ajustat max broad DIMENSION
   inaltimeminima             = DIMENSION
   aliniere                   = inherits: \seteazaalinierea
   strut                      = da nu niciunul local global
   autostrut                  = da nu
   locatie                    = inaltime adancime inalt jos sus centru subsol linie lohi suspendat mentine formula matematica
                               normal
   autolatime                 = da nu fortat
   linii                      = NUMMER
   sus                        = BEFEHL
   jos                        = BEFEHL
   blanc                      = da nu
   profile                    = NAME
   gol                        = da nu
   loffset                    = DIMENSION
   roffset                    = DIMENSION
   toffset                    = DIMENSION
   boffset                    = DIMENSION
   orientation                 = NUMMER

```

\seteazaingust [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```

1  NAME                      OPT
2  stanga                    = DIMENSION
   mijloc                    = DIMENSION
   dreapta                   = DIMENSION
   implicit                   = [-+]stanga [-+]centru [-+]dreapta NUMMER*stanga NUMMER*centru NUMMER*dreapta reset
   inainte                   = BEFEHL
   dupa                      = BEFEHL

```

\seteazainteractiunea [...] [...] <sup>1</sup> <sup>2</sup>

```

1  NAME                                OPT
2  stare                               = start stop
    stil                               = STYLE BEFEHL
    culoare                             = COLOR
    culoarecontrast                     = COLOR
    titlu                               = TEXT
    subtitlu                            = COLOR
    autor                               = TEXT
    data                               = TEXT
    keyword                             = TEXT
    focus                               = standard incadrat latime latimeminima inaltime inaltimeminima ajustat tight
    meniu                               = on dezactivat
    fieldlayer                          = auto NAME
    calculeaza                          = REFERENCE
    click                               = da nu
    display                             = normal nou
    pagina                              = da nu pagina nume auto
    actiunedeschidere                   = REFERENCE
    actiuneinchidere                    = REFERENCE
    actiunedeschiderepagina             = REFERENCE
    actiuneinchiderepagina              = REFERENCE
    setsimbol                           = NAME
    inaltime                            = DIMENSION
    inaltime                             = DIMENSION
    focusoffset                         = DIMENSION

```

\seteazainteractiunea [...] <sup>\*</sup>

```

*  NAME                                OPT

```

\seteazajos [...] <sup>1</sup> [...] <sup>2</sup>

```

1  text margine OPTbdura
2  inherits: \setuplayouttext

```

\seteazalegenda [...] <sup>1</sup> [...] <sup>2</sup>

```

1  NAME                                OPT
2  suffix                               = BEFEHL
    suffixseparator                     = BEFEHL
    suffixstopper                       = BEFEHL
    locatie                             = stanga dreapta centru jos inalt grila linii overlay intern extern innermargin outermargin
                                         marginestanga marginedreapta lefthanging righthanging suspenda sus subsol dilatat tolerant
                                         foartetolerant niciunul implicit

    comanda                             = \...##1
    comandanumar                        = \...##1
    comandatext                         = \...##1
    spatiuinainte                       = inherits: \blanc
    spaceinbetween                      = inherits: \blanc
    spatiudupa                          = inherits: \blanc
    distanta                            = DIMENSION
    stiltitlu                           = STYLE BEFEHL
    culoaretitlu                        = COLOR
    headseparator                       = TEXT
    intre                               = BEFEHL
    stil                                = STYLE BEFEHL
    culoare                             = COLOR
    offsetsus                           = DIMENSION
    offsetjos                           = DIMENSION
    numar                               = da nu niciunul
    group                               = TEXT
    marginestanga                       = DIMENSION
    marginedreapta                     = DIMENSION
    innermargin                         = DIMENSION
    outermargin                         = DIMENSION
    aliniere                            = inherits: \seteazaalinierea
    latime                              = ajustat max DIMENSION
    latimeminima                       = ajustat DIMENSION
    latimemaxima                       = DIMENSION
    inherits: \setupcounterinherits: \seteazainconjurat

```

\seteazalegendele [...] <sup>1</sup> [...] <sup>2</sup>

```

1  NAME                                OPT
2  inherits: \seteazalegenda

```

```
\seteazaliniesilabe [...,.*,...]
*   semn = normal larg
```

```
\seteazaliniesubtire [...,.*,...]
*   inalttime      = max DIMENSION
    inalttime      = max DIMENSION
    fundal         = culoare
    frame          = on dezactivat
    grosimerigla    = DIMENSION
    alternativ       = a b c niciunul
    culoarefundal   = COLOR
    culoare         = COLOR
    spatiereinterliniara = mic mediu mare NUMMER
    inainte         = BEFEHL
    dupa            = BEFEHL
    intre           = BEFEHL
    n               = NUMMER
```

```
\seteazalinii [...,1...] [...,.*2...]
1   NAME          OPT
2   optiune       = impachetat
    inainte       = BEFEHL
    dupa          = BEFEHL
    intre         = BEFEHL
    aliniat       = inherits: \seteazaaliniat
    aliniere      = inherits: \seteazaalinierea
    spatiu        = da on dezactivat fixat implicit
    comanda       = BEFEHL
    stil          = STYLE BEFEHL
    culoare       = COLOR
    stanga        = BEFEHL
    dreapta       = BEFEHL
```

```
\seteazaliniimargine [...,1...] [...,.*2...]
1   NUMMER        OPT
2   inherits: \setupmarginrule
```

```
\seteazaliniinegre [...,.*,...]
*   latime        = max DIMENSION
    inalttime      = max DIMENSION
    inalttime      = max DIMENSION
    distanta      = DIMENSION
    n              = NUMMER
    alternativ      = a b
    stil           = STYLE BEFEHL
    culoare        = COLOR
    type           = mp da nu
    mp             = NAME
```

```
\seteazaliniiumplere [...,.*,...]
*   inainte       = BEFEHL
    dupa          = BEFEHL
    margine        = DIMENSION
    latime         = DIMENSION
    distanta       = DIMENSION
    grosimerigla   = DIMENSION
    culoare        = COLOR
```

\seteazalista [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```

1  LISTE
2  stare = start stop
   locatie = niciunul aici
   type = simple comanda userdata
   criteriu = local intro referinta SECTIONBLOCK:referinta tot SECTIONBLOCK:tot text SECTIONBLOCK:text
             curent SECTIONBLOCK:curent aici precedent SECTIONBLOCK:precedent componenta ABSCHNITT
             SECTIONBLOCK:ABSCHNITT
   lista = NAME
   latime = ajustat broad DIMENSION
   inaltime = ajustat broad DIMENSION
   inaltime = ajustat broad DIMENSION
   simbol = unu doi trei niciunul implicit
   eticheta = da nu niciunul NAME
   starter = BEFEHL
   stopper = BEFEHL
   comanda = \...#1#2#3
   comandanumar = \...#1
   comandatext = \...#1
   comandapagina = \...#1
   numarpagina = da nu totdeauna
   numartitlu = da nu totdeauna
   inainte = BEFEHL
   dupa = BEFEHL
   intre = BEFEHL
   margine = niciunul DIMENSION
   distanta = niciunul DIMENSION
   alinieretitlu = da nu
   numberalign = stanga dreapta centru flushleft flushright intern extern
   aliniere = inherits: \seteazaalinierea
   suspenda = da nu
   stanga = BEFEHL
   dreapta = BEFEHL
   interactiune = da nu tot numar text titlu pagina numarsetiune numarpagina
   limittext = da nu TEXT
   stil = STYLE BEFEHL
   culoare = COLOR
   stilnumar = STYLE BEFEHL
   culoarenumar = COLOR
   stiltext = STYLE BEFEHL
   culoaretext = COLOR
   stilpagina = STYLE BEFEHL
   culoarepagina = COLOR
   referinta = NUMMER
   extras = NAME
   order = comanda tot titlu
   alternativ = a b c d e f g stanga dreapta sus subsol comanda niciunul interactive paragraf orizontal
              vertical NAME
   latimemaxima = DIMENSION
   pageprefix = da nu
   pageprefixseparatorset = NAME
   pageprefixconversionset = NAME
   pageprefixset = NAME
   pageprefixsegments = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                       ABSCHNITT:tot curent
   pageprefixconnector = BEFEHL PROCESSOR->BEFEHL
   pageconversionset = NAME
   pagestarter = BEFEHL PROCESSOR->BEFEHL
   pagestopper = BEFEHL PROCESSOR->BEFEHL
   inherits: \setupcounterinherits: \seteazainconjurat

```

\seteazalistacombinata [...<sup>1</sup>] [...<sup>2</sup>,...]

```

1  LISTE
2  criteriu = local intro referinta SECTIONBLOCK:referinta tot SECTIONBLOCK:tot text SECTIONBLOCK:text curent
             SECTIONBLOCK:curent aici precedent SECTIONBLOCK:precedent componenta ABSCHNITT SECTIONBLOCK:ABSCHNITT
   referinta = NUMMER
   extras = NAME
   order = comanda tot titlu
   alternativ = a b c d e f g stanga dreapta sus subsol comanda niciunul interactive paragraf orizontal vertical
              NAME

```

\setareCOMBINEDLIST [...<sup>\*</sup>,...]

\* inherits: \seteazalistacombinata  
instances: content

\setarecontent [...<sup>\*</sup>,...]

\* inherits: \seteazalistacombinata

```

\seteazamajuscule [...,1...] [...,2...,...]
1 NAME OPT
2 titlu = da nu
  sc = da nu
  stil = STYLE BEFEHL

```

```

\seteazamakeup [...,1...] [...,2...,...]
1 NAME OPT
2 pagina = inherits: \pagina
  comanda = BEFEHL
  latime = DIMENSION
  inaltime = DIMENSION
  alinieare = inherits: \seteazaalinieare
  setups = NAME
  sus = BEFEHL
  jos = BEFEHL
  inainte = BEFEHL
  dupa = BEFEHL
  locatie = sus
  referinta = REFERENCE
  pagestate = start stop
  stareantet = start stop inalt gol niciunul normal
  staresubsol = start stop inalt gol niciunul normal
  staresus = start stop inalt gol niciunul normal
  starejos = start stop inalt gol niciunul normal
  staretext = start stop inalt gol niciunul normal
  douafete = da nu gol
  stil = STYLE BEFEHL
  culoare = COLOR

```

```

\seteazamarcaje [...,1...] [...,2...,...]
1 BESCHRIFTUNG OPT
2 stare = start stop
  expansiune = da nu
  separator = BEFEHL
  filtercommand = \...##1

```

```

\seteazameniuiinteractiune [...,1...] [...,2...,...]
1 NAME OPT
2 alternativ = vertical orizontal ascuns
  category = NAME
  offsetstanga = overlay incadrat niciunul implicit DIMENSION
  offsetdreapta = overlay incadrat niciunul implicit DIMENSION
  offsetsus = overlay incadrat niciunul implicit DIMENSION
  offsetjos = overlay incadrat niciunul implicit DIMENSION
  latimemaxima = DIMENSION
  inaltimemaxima = DIMENSION
  itemalign = stanga centru dreapta flushleft flushright jos inalt lohi
  stare = start gol local
  stanga = BEFEHL
  dreapta = BEFEHL
  distanta = overlay DIMENSION
  inainte = BEFEHL
  dupa = BEFEHL
  intre = BEFEHL
  pozitie = da nu
  mijloc = BEFEHL
  stil = STYLE BEFEHL
  culoare = COLOR
  aceeasipagina = da nu gol niciunul normal implicit
  culoarecontrast = COLOR
  inherits: \seteazainconjurat

```

```

\seteazaminicitat [...,*...,...]
* inherits: \setupdelimitedtext

```

```

\seteazanumarpagina [...,*...,...]
* inherits: \setupuserpagenumber

```

```

\seteazanumarsubpagina [...,*...,...]
* inherits: \setupcounter

```

\seteazanumartitlu [...]<sup>1</sup> [...]<sup>2</sup>

1 ABSCHNITT  
2 [-+]NUMMER

\seteazanumerotarelinii [...]<sup>1</sup>,...<sup>2</sup> [...],...<sup>2</sup>,...]

1 NAME OPT  
2 start = NUMMER  
pas = NUMMER  
metoda = pagina primul urmatorul  
conversie = NAME  
continua = da nu  
locatie = text begin end implicit stanga dreapta intern extern instanga indreapta margine inmargine  
distanta = DIMENSION  
aliniere = intern extern flushleft flushright stanga dreapta centru auto  
comanda = \...##1  
stanga = BEFEHL  
dreapta = BEFEHL  
margine = DIMENSION  
latime = margine DIMENSION  
stil = STYLE BEFEHL  
culoare = COLOR

\seteazanumerotarepagina [...],...<sup>\*</sup>,...]

\* alternativ = ofata douafete  
pagina = inherits: \pagina  
strut = da nu  
comanda = \...##1  
stanga = BEFEHL  
dreapta = BEFEHL  
stare = start stop  
latime = DIMENSION  
locatie = antet subsol stanga centru dreapta instanga indreapta margine inmargine lamargine marginebordura  
stil = STYLE BEFEHL  
culoare = COLOR

\seteazanumerotareparagrafe [...],...<sup>\*</sup>,...]

\* stare = start stop linie reset  
distanta = DIMENSION  
stil = STYLE BEFEHL  
culoare = COLOR

\seteazapaleta [...]

\* NAME

\seteazaparagrafe [...]<sup>1</sup> [...],...<sup>2</sup> [...],...<sup>3</sup>,...]

1 NAME OPT OPT  
2 fiecare NUMMER  
3 n = NUMMER  
inainte = BEFEHL  
dupa = BEFEHL  
latime = DIMENSION  
distanta = DIMENSION  
inaltime = DIMENSION ajustat  
sus = BEFEHL  
jos = BEFEHL  
aliniere = inherits: \seteazaalinierea  
intern = BEFEHL  
comanda = BEFEHL  
rigla = on dezactivat  
grosimerigla = DIMENSION  
culoarerigla = COLOR  
stil = STYLE BEFEHL  
culoare = COLOR

**\seteazaparafrage** [<sup>1</sup>...] [<sup>2</sup>...,...]

```
1  NAME:NUMMER          OPT
2  n                    =  NUMMER
   inainte              =  BEFEHL
   dupa                  =  BEFEHL
   latime                =  DIMENSION
   distanta              =  DIMENSION
   inaltime              =  DIMENSION ajustat
   sus                   =  BEFEHL
   jos                   =  BEFEHL
   aliniere              =  inherits: \seteazaalinierea
   intern                =  BEFEHL
   comanda               =  BEFEHL
   rigla                 =  on dezactivat
   grosimerigla          =  DIMENSION
   culoarerigla          =  COLOR
   stil                  =  STYLE BEFEHL
   culoare               =  COLOR
```

**\seteazaplasareaopozita** [...,...<sup>\*</sup>...,...]

```
*  stare                =  start stop
   inainte              =  BEFEHL
   dupa                  =  BEFEHL
   intre                =  BEFEHL
```

**\seteazaprograme** [...,...<sup>\*</sup>...,...]

```
*  stil                 =  STYLE BEFEHL
   culoare              =  COLOR
```

**\seteazareferinte** [...,...<sup>\*</sup>...,...]

```
*  stare                =  start stop
   expansiune           =  da nu xml
   autofile             =  da nu
   export               =  da nu
   stanga               =  BEFEHL
   dreapta              =  BEFEHL
   latime               =  DIMENSION
   douafete             =  da nu
   interactiune         =  eticheta text simbol tot
   separator            =  BEFEHL
   prefix               =  + - TEXT
```

\seteazaregistru [<sup>1</sup>...] [<sup>2</sup>...,...]

```

1  NAME NAME:NUMMER      OPT
2  referencemethod      = avans
   expansiune           = da nu xml
   numarpropriu         = da nu
   xmlsetup             = NAME
   alternativ            = a b A B
   metoda               = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc
   compress             = da nu tot
   check                = da nu
   criteriu             = local text curent precedent tot ABSCHNITT
   pageprefixseparatorset = BEFEHL
   pageprefixconversionset = NAME
   pageprefixstarter    = BEFEHL PROCESSOR->BEFEHL
   pageprefixstopper    = BEFEHL PROCESSOR->BEFEHL
   pageprefixset        = NAME
   pageprefixsegments   = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                        ABSCHNITT:tot curent

   pageprefixconnector  = BEFEHL
   pageprefix           = da nu
   pageseparatorset     = NAME
   pageconversionset    = NAME
   pagestarter          = BEFEHL PROCESSOR->BEFEHL
   pagestopper          = BEFEHL PROCESSOR->BEFEHL
   pagesegments         = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot
   latimemaxima         = DIMENSION
   indicator            = da nu
   inainte              = BEFEHL
   dupa                 = BEFEHL
   comanda              = \...##1
   comandatext          = \...##1
   deeptextcommand      = \...##1
   comandapagina       = \...##1
   distanta             = DIMENSION
   interactiune         = text numarpagina
   numarpagina          = da nu
   simbol               = a n niciunul 1 2 BEFEHL
   language             = implicit DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scن SPRACHE
   stil                 = STYLE BEFEHL
   culoare              = COLOR
   stiltext             = STYLE BEFEHL
   culoaretext          = COLOR
   stilpagina           = STYLE BEFEHL
   culoarepagina        = COLOR
   pageleft             = BEFEHL
   pageright            = BEFEHL
   n                    = NUMMER
   balanta              = da nu
   aliniere             = inherits: \seteazaalinierea
   numberorder          = numere

```



\seteazaregistru [...<sup>1</sup>,...] [...<sup>2</sup>,...] [...<sup>3</sup>,...]

```

1  NAME                      OPT          OPT
2  NUMMER
3  referencemethod           = avans
   expansiune                 = da nu xml
   numarpropriu              = da nu
   xmlsetup                   = NAME
   alternativ                  = a b A B
   metoda                     = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc
   compress                   = da nu tot impachetat
   check                      = da nu
   criteriu                   = local text curent precedent tot ABSCHNITT
   pageprefixseparatorset     = BEFEHL
   pageprefixconversionset    = NAME
   pageprefixstarter          = BEFEHL PROCESSOR->BEFEHL
   pageprefixstopper          = BEFEHL PROCESSOR->BEFEHL
   pageprefixset              = NAME
   pageprefixsegments         = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                               ABSCHNITT:tot curent

   pageprefixconnector        = BEFEHL
   pageprefix                 = da nu
   pageseparatorset           = NAME
   pageconversionset          = NAME
   pagestarter                = BEFEHL PROCESSOR->BEFEHL
   pagestopper                = BEFEHL PROCESSOR->BEFEHL
   pagesegments               = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot
   latimemaxima               = DIMENSION
   indicator                  = da nu
   inainte                    = BEFEHL
   dupa                       = BEFEHL
   comanda                    = \...##1
   comandatext                 = \...##1
   deeptextcommand            = \...##1
   comandapagina              = \...##1
   distanta                   = DIMENSION
   interactiune               = text numarpagina
   numarpagina                = da nu
   simbol                     = a n niciunul 1 2 BEFEHL
   language                   = implicit DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scen SPRACHE
   stil                       = STYLE BEFEHL
   culoare                    = COLOR
   stiltext                   = STYLE BEFEHL
   culoaretext                 = COLOR
   stilpagina                 = STYLE BEFEHL
   culoarepagina              = COLOR
   pageleft                   = BEFEHL
   pageright                   = BEFEHL
   n                           = NUMMER
   balanta                    = da nu
   aliniere                    = inherits: \seteazaalinierea
   numberorder                = numere

```

\setareREGISTER [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```

1  NUMMER                      OPT
2  inherits: \seteazaregistru
instances: index

```

\setareindex [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```

1  NUMMER                      OPT
2  inherits: \seteazaregistru

```

\seteazarigletext [...<sup>\*</sup>,...]

```

*  inainte                    = BEFEHL
   dupa                       = BEFEHL
   intre                      = BEFEHL
   grosimerigla               = DIMENSION
   locatie                    = stanga inmarginie
   stil                       = STYLE BEFEHL
   culoare                    = COLOR
   culoarerigla               = COLOR
   latime                     = DIMENSION
   inaltime                   = DIMENSION
   distanta                   = DIMENSION
   corectieadancime           = on dezactivat
   fonttext                   = inherits: \seteazafonttext

```

**\seteazarigleumplere** [...,..<sup>\*</sup>...,...]

\*    inainte                = BEFEHL  
     dupa                 = BEFEHL  
     n                     = NUMBER  
     spatiereinterliniara = mic mediu mare NUMBER  
     distanta              = DIMENSION  
     latime                = ajustat broad DIMENSION  
     separator            = BEFEHL  
     stil                  = STYLE BEFEHL  
     culoare              = COLOR

**\seteazarotare** [...,..<sup>\*</sup>...,...]

\*    locatie = ajustat broad adancime inalt centru implicit normal  
     rotatie = stanga dreapta intern extern NUMBER  
     inherits: \seteazainconjurat

**\seteazasimbol** [...]

\*    NAME

**\seteazasinonime** [...,..<sup>1</sup>...,...<sup>2</sup>...,...]

1    SINGULAR                OPT  
2    expansiune              = da nu xml  
     alternativ               = primul ultim normal NAME  
     urmatorul               = BEFEHL  
     comanda                = \...##1##2##3  
     comandatext            = \...##1  
     synonymcommand        = \...##1  
     language               = implicit DIN<sub>5007-1</sub> DIN<sub>5007-2</sub> Duden de-DE de-CH de-AT ru-iso9 ocs-sc<sub>n</sub> SPRACHE  
     metoda                 = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc  
     criteriu                = curent precedent local text tot ABSCHNITT  
     stil                    = STYLE BEFEHL  
     culoare                = COLOR  
     stiltext                = STYLE BEFEHL  
     culoaretext            = COLOR  
     stilsinonim            = STYLE BEFEHL  
     culoaresinonim        = COLOR

**\seteazasortare** [...,..<sup>1</sup>...,...<sup>2</sup>...,...]

1    SINGULAR                OPT  
2    expansiune              = da nu xml  
     alternativ               = primul ultim normal NAME  
     urmatorul               = BEFEHL  
     comanda                = \...##1##2##3  
     comandatext            = \...##1  
     synonymcommand        = \...##1  
     language               = implicit DIN<sub>5007-1</sub> DIN<sub>5007-2</sub> Duden de-DE de-CH de-AT ru-iso9 ocs-sc<sub>n</sub> SPRACHE  
     metoda                 = implicit inainte dupa primul ultim ch mm zm pm mc zc pc uc  
     criteriu                = curent precedent local text tot ABSCHNITT  
     stil                    = STYLE BEFEHL  
     culoare                = COLOR  
     stiltext                = STYLE BEFEHL  
     culoaretext            = COLOR  
     stilsinonim            = STYLE BEFEHL  
     culoaresinonim        = COLOR

**\seteazaspatiu** [...]

\*    fixat impachetat <sup>OPT</sup> broad

**\seteazaspatiu**alb**** [...,..<sup>\*</sup>...,...]

\*    fix fixat flexibil linie <sup>OPT</sup> jumatatelinie quarterline niciunul mic mediu mare implicit DIMENSION

```

\seteazaspatiuiinterliniar [...] [...]
1 NAME OPT
2 linie = DIMENSION
  inalttime = NUMMER
  inalttime = NUMMER
  inalttimeminima = NUMMER
  mindepth = NUMMER
  distanta = DIMENSION
  sus = NUMMER inalttime
  jos = NUMMER
  dilatat = NUMMER
  shrink = NUMMER

```

```

\seteazaspatiuiinterliniar [...]
* on dezactivat reset auto mic mediu mare NUMMER DIMENSION

```

```

\seteazaspatiuiinterliniar [...]
* NAME

```

```

\seteazasubsol [...]
1 text margine bordura
2 inherits: \setuplayouttext

```

```

\seteazasus [...]
1 text margine bordura
2 inherits: \setuplayouttext

```

```

\seteazatabele [...]
* text = DIMENSION max
  split = da nu repetat auto
  frame = on dezactivat
  NL = inherits: \blanc
  VL = mic mediu mare niciunul NUMMER
  HL = mic mediu mare niciunul NUMMER
  distanta = mic mediu mare niciunul
  aliniere = stanga centru dreapta
  comenzi = BEFEHL
  fonttext = inherits: \seteazafonttext
  grosimerigla = DIMENSION
  inalttime = strut NUMMER
  inalttime = strut NUMMER
  openup = DIMENSION

```

```

\seteazatabulatori [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setuptabulation

```

```

\seteazatext [...]
1 text margine bordura
2 inherits: \setuplayouttext

```

```

\seteazatexteantet [...] [...] [...] [...] [...]
1 text margine bordura OPT OPT OPT OPT OPT
2 data numarpagina BESCHRIFTUNG TEXT BEFEHL
3 data numarpagina BESCHRIFTUNG TEXT BEFEHL
4 data numarpagina BESCHRIFTUNG TEXT BEFEHL
5 data numarpagina BESCHRIFTUNG TEXT BEFEHL

```

```

\seteazatextejos [...] [...] [...] [...] [...]
1 text margine bordura OPT OPT OPT OPT OPT
2 data numarpagina BESCHRIFTUNG TEXT BEFEHL
3 data numarpagina BESCHRIFTUNG TEXT BEFEHL
4 data numarpagina BESCHRIFTUNG TEXT BEFEHL
5 data numarpagina BESCHRIFTUNG TEXT BEFEHL

```

```
\seteazatextesubsol [...1] [...2] [...3] [...4] [...5]
1 text margine bordura OPT OPT OPT OPT OPT
2 data numarpagina BESCHRIFTUNG TEXT BEFEHL
3 data numarpagina BESCHRIFTUNG TEXT BEFEHL
4 data numarpagina BESCHRIFTUNG TEXT BEFEHL
5 data numarpagina BESCHRIFTUNG TEXT BEFEHL
```

```
\seteazatextesus [...1] [...2] [...3] [...4] [...5]
1 text margine bordura OPT OPT OPT OPT OPT
2 data numarpagina BESCHRIFTUNG TEXT BEFEHL
3 data numarpagina BESCHRIFTUNG TEXT BEFEHL
4 data numarpagina BESCHRIFTUNG TEXT BEFEHL
5 data numarpagina BESCHRIFTUNG TEXT BEFEHL
```

```
\seteazatextetext [...1] [...2] [...3] [...4] [...5]
1 text margine bordura OPT OPT OPT OPT OPT
2 data numarpagina BESCHRIFTUNG TEXT BEFEHL
3 data numarpagina BESCHRIFTUNG TEXT BEFEHL
4 data numarpagina BESCHRIFTUNG TEXT BEFEHL
5 data numarpagina BESCHRIFTUNG TEXT BEFEHL
```

```
\setareLABELtext [...1] [...2,...2,...]
1 SPRACHE OPT
2 KEY = VALUE
instances: head label mathlabel taglabel unit operator prefix suffix btxlabel
```

```
\setarebtxlabeltext [...1] [...2,...2,...]
1 SPRACHE OPT
2 KEY = VALUE
```

```
\setareheadtext [...1] [...2,...2,...]
1 SPRACHE OPT
2 KEY = VALUE
```

```
\setarelabeltext [...1] [...2,...2,...]
1 SPRACHE OPT
2 KEY = VALUE
```

```
\setaremathlabeltext [...1] [...2,...2,...]
1 SPRACHE OPT
2 KEY = VALUE
```

```
\setareoperatorortext [...1] [...2,...2,...]
1 SPRACHE OPT
2 KEY = VALUE
```

```
\setareprefixtext [...1] [...2,...2,...]
1 SPRACHE OPT
2 KEY = VALUE
```

```
\setaresuffixtext [...1] [...2,...2,...]
1 SPRACHE OPT
2 KEY = VALUE
```

```
\setaretaglabeltext [...1] [...2,...2,...]
1 SPRACHE OPT
2 KEY = VALUE
```

```
\setareunittext [...1] [...2,...2,...]
1 SPRACHE OPT
2 KEY = VALUE
```

**\seteazatitlu** [...<sup>1</sup>,...] [...<sup>2</sup>,...,...]

```

1  ABSCHNITT OPT
2  frontpartlabel      = NAME
   bodypartlabel       = NAME
   appendixlabel       = NAME
   backpartlabel       = NAME
   expansiune          = da nu xml
   catcodes             = NAME
   sectionresetset     = NAME
   sectionseparatorset = NAME
   sectionconversionset = NAME
   conversie           = NAME
   sectionstarter      = BEFEHL PROCESSOR->BEFEHL
   sectionstopper      = BEFEHL PROCESSOR->BEFEHL
   sectionset          = NAME
   sectionsegments     = NUMMER NUMMER:NUMMER NUMMER:* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:*
                        ABSCHNITT:tot curent

   referenceprefix     = + - TEXT
   stil                = STYLE BEFEHL
   culoare             = COLOR
   stiltext            = STYLE BEFEHL
   culoaretext         = COLOR
   stilnumar           = STYLE BEFEHL
   culoarenumar        = COLOR
   cuplare             = ABSCHNITT
   numarpropriu        = da nu
   beforesection       = BEFEHL
   aftersection        = BEFEHL
   insidesection       = BEFEHL
   numarincrement      = da nu lista gol
   punetitlu           = da nu ascuns gol sectiune
   numar              = da nu
   pagina              = inherits: \pagina
   marcaje             = pagina reset
   antet               = start stop inalt niciunul normal gol faramarcare NAME
   text                = start stop inalt niciunul normal gol faramarcare NAME
   subsol              = start stop inalt niciunul normal gol faramarcare NAME
   inainte             = BEFEHL
   dupa                = BEFEHL
   intre               = BEFEHL
   continua            = da nu
   alinieretitlu       = da nu obiectmobil
   spatiereinterliniara = NAME
   interactiune        = lista referinta
   internalgrid        = NAME
   grid                = normal standard da strict tolerant sus subsol ambele broad ajustat primul ultim inalt unu
                        jos niciunul linie strut box min max centru math math:linie math:jumatatelinie math:-line
                        math:-halfline NAME

   aliniere            = inherits: \seteazaalinierea
   toleranta           = inherits: \seteazatoleranta
   strut               = da nu
   suspenda            = linie broad ajustat niciunul NUMMER
   margine             = DIMENSION
   aliniaturmator      = da nu auto
   alternativ           = text paragraf normal margine inmargine sus centru subsol reverse textmarginal NAME
   latime              = DIMENSION
   numberwidth         = DIMENSION
   latimetext          = DIMENSION
   distanta            = DIMENSION
   textdistance        = DIMENSION
   comandainainte     = BEFEHL
   comandadupa        = BEFEHL
   comanda             = \...##1##2
   comandatext         = \...##1
   deeptextcommand     = \...##1
   comandanumar        = \...##1
   deepnumbercommand   = \...##1
   locatie             = NAME
   criteriu            = strict pozitiv tot

```

**\seteazatitluri** [...<sup>1</sup>,...] [...<sup>2</sup>,...,...]

```

1  ABSCHNITT OPT
2  inherits: \seteazatitlu

```

**\seteazatoleranta** [...\*,...]

\* orizontal vertical foartestrict strict tolerant foartetolerant spatiu dilatat

**\seteazatranzitiepagina** [<sup>1</sup>...]

\* reset auto start aleator NUMBER

**\seteazatype** [<sup>1</sup>...,...]<sup>2</sup> [<sup>2</sup>...,...]

1 NAME OPT  
2 optiune = mp lua xml parsed-xml nested tex context niciunul NAME  
comanda = CSNAME  
stanga = BEFEHL  
dreapta = BEFEHL  
tab = da nu NUMBER  
compact = absolut ultim tot  
escape = da nu TEXT PROCESSOR->TEXT  
stil = STYLE BEFEHL  
culoare = COLOR  
linii = da nu normal despsilabe  
spatiu = on dezactivat normal fixat dilatat

**\seteazatyping** [<sup>1</sup>...,...]<sup>2</sup> [<sup>2</sup>...,...]

1 NAME OPT  
2 margineimpara = DIMENSION  
marginepara = DIMENSION  
margine = da nu standard DIMENSION  
optiune = mp lua xml parsed-xml nested tex context niciunul NAME  
stil = STYLE BEFEHL  
culoare = COLOR  
alinie = inherits: \seteazaalinie  
linii = da nu normal despsilabe  
spatiu = on dezactivat normal fixat dilatat  
keeptogether = da nu  
inainte = BEFEHL  
dupa = BEFEHL  
strip = da nu NUMBER  
range = NUMBER NAME  
tab = da nu NUMBER  
escape = da nu TEXT PROCESSOR->TEXT  
aliniaturmator = da nu auto  
continua = da nu  
start = NUMBER  
stop = NUMBER  
pas = NUMBER  
numerotare = fisier linie nu  
blanc = inherits: \blanc

**\seteazaurl** [<sup>1</sup>...,...<sup>\*</sup>...,...]

\* stil = STYLE BEFEHL  
culoare = COLOR

**\setelementexporttag** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...]

1 NAME OPT  
2 export nature pdf  
3 inline display mixed

**\setemeasure** {<sup>1</sup>...} {<sup>2</sup>...}

1 NAME  
2 DIMENSION

**\setevalue** {<sup>1</sup>...} {<sup>2</sup>...}

1 NAME  
2 CONTENT

**\setevariable** {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}

1 NAME  
2 KEY  
3 VALUE

**\setevariables** [<sup>1</sup>...] [<sup>2</sup>...,...<sup>2</sup>...,...]

1 NAME  
2 set = BEFEHL  
reset = BEFEHL  
KEY = VALUE

```
\setfirstline [...]
```

*	NAME	OPT
---	------	-----

\setfirstpasscharacteralign

`\setflag {...}`

\* NAME

```
\setfont ...
```

\* FONT

```
\setfontcolorsheme [..]
```

\* NAME

`\setfontfeature {.*.}`

\* NAME

`\setfontsolution [...]`

\* NAME

\setfontstrut

```
\setglobalscript [...]
```

```
* hangul hanzi nihongo ethiopic thai test NAME
```

$$\backslash \text{setgmeasure} \{ \dots \} \{ \dots \}$$

1 NAME

## 2 DIMENSION

```
\setgvalue {..1..} {..2..}
```

1 NAME

2 CONTENT

$$\backslash\mathrm{setgvariable}\ \{.^1.\}\ \{.^2.\}\ \{.^3.\}$$

1 NAME

2 KEY

3 VALUE

$$\backslash\mathrm{setgvariables} \left[ \dots \right] \left[ \dots, \dots \overset{2}{=} \dots, \dots \right]$$

1 NAME

2     set     =   BEFEHL

reset = BEFEHL

KEY = VALUE

`\sethboxregister` ...  $\{...\}$

1 CSNAME NUMMER

2 CONTENT

`\sethyphenatedurlafter {...}`

\* TEXT

`\sethyphenatedurlbefore {...}`

\* TEXT

`\sethyphenatedurlnormal {...}`

\* TEXT

```
\sethyphenationfeatures [...,*,...]
```

```
* NAME reset OPT
```

<pre> \setinitial [...] [...] 1  NAME          OPT          OPT 2  inherits: \setupinitial </pre>
<pre> \setinjector [...] [...] [...] 1  NAME 2  NUMMER 3  BEFEHL </pre>
<pre> \setinteraction [...] *  ascuns NAME </pre>
<pre> \setinterfacecommand {...} {...} 1  NAME 2  NAME </pre>
<pre> \setinterfaceconstant {...} {...} 1  NAME 2  NAME </pre>
<pre> \setinterfaceelement {...} {...} 1  NAME 2  NAME </pre>
<pre> \setinterfacemessage {...} {...} {...} 1  NAME 2  titlu NAME NUMMER 3  TEXT </pre>
<pre> \setinterfacevariable {...} {...} 1  NAME 2  NAME </pre>
<pre> \setinternalrendering [...] [...] [...] 1  NAME 2  auto embed 3  CONTENT </pre>
<pre> \setitaliccorrection [...] *  reset 1 2 </pre>
<pre> \setJSreamble {...} {...} 1  NAME 2  CONTENT </pre>
<pre> \setlayer [...] [...] [...] [...] [...] 1  NAME          OPT          OPT 2  stanga dreapta par impar 3  inherits: \setuplayer 4  CONTENT </pre>
<pre> \setlayerframed [...] [...] [...] [...] [...] [...] 1  NAME          OPT          OPT 2  inherits: \setuplayer 3  inherits: \seteazainconjurat 4  CONTENT </pre>
<pre> \setlayerframed [...] [...] [...] [...] 1  NAME          OPT 2  inherits: \setuplayerinherits: \seteazainconjurat 3  CONTENT </pre>



**\setlayertext** [<sup>1</sup>...] [<sup>2</sup>...<sub>OPT</sub>...] [<sup>3</sup>...<sub>OPT</sub>...] {<sup>4</sup>...}

1 NAME  
2 inherits: \setuplayer  
3 aliniere = inherits: \setezaalinierea  
latime = DIMENSION  
stil = STYLE BEFEHL  
culoare = COLOR  
4 TEXT

**\setlinefiller** [...]

\* filler NAME

**\setlocalhsize** [...]

\* [-+]DIMENSION <sub>OPT</sub>

**\setlocalscript** [...]

\* hangul hanzi nihongo ethiopic thai test NAME

**\setMPlayer** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sub>OPT</sub>...] {<sup>4</sup>...}

1 NAME  
2 NAME  
3 inherits: \setuplayer  
4 CONTENT

**\setMPpositiongraphic** {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...<sub>OPT</sub>...}

1 NAME  
2 NAME  
3 KEY = VALUE

**\setMPpositiongraphicrange** {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...<sub>OPT</sub>...}

1 NAME  
2 NAME  
3 NAME  
4 KEY = VALUE

**\setMPtext** {<sup>1</sup>...} {<sup>2</sup>...}

1 NAME  
2 TEXT

**\setMPvariable** [<sup>1</sup>...] [<sup>2</sup>...]

1 NAME  
2 KEY = VALUE

**\setMPvariables** [<sup>1</sup>...] [<sup>2</sup>...<sub>OPT</sub>...]

1 NAME  
2 KEY = VALUE

**\setmainbodyfont**

**\setmainparbuilder** [...]

\* implicit oneline basic NAME

**\setmarker** [<sup>1</sup>...] [<sup>2</sup>...]

1 NAME  
2 NUMMER

**\setmarking** [<sup>1</sup>...] {<sup>2</sup>...}

1 BESCHRIFTUNG  
2 TEXT

**\setmathstyle** {...,\*...}

\* display text script scriptscript cramped uncramped normal impachetat mic mare NAME

<pre> \setmeasure {...} {...} 1  NAME 2  DIMENSION </pre>
<pre> \setmessagetext {...} {...} 1  NAME 2  NAME NUMBER </pre>
<pre> \setmode {...} *  NAME </pre>
<pre> \setnostrut </pre>
<pre> \setnote [...]<sup>1</sup> [...,<sup>2</sup>...] {...}<sup>3</sup> 1  NAME 2  REFERENCE 3  TEXT </pre>
<pre> \setnotetext [...]<sup>1</sup> [...,<sup>2</sup>...] {...}<sup>3</sup> 1  NAME 2  REFERENCE 3  TEXT </pre>
<pre> \setnotetext [...]<sup>1</sup> [...,<sup>2</sup>...] 1  NAME 2  titlu      = TEXT    semncarte = TEXT    lista     = TEXT    referinta = REFERENCE </pre>
<pre> \setnote [...]<sup>1</sup> [...,<sup>2</sup>...] 1  NAME 2  titlu      = TEXT    semncarte = TEXT    lista     = TEXT    referinta = REFERENCE </pre>
<pre> \setobject {...}<sup>1</sup> {...}<sup>2</sup> \... {...}<sup>3</sup> {...}<sup>4</sup> 1  NAME 2  NAME 3  CSNAME 4  CONTENT </pre>
<pre> \setoldstyle </pre>
<pre> \setpagereference {...}<sup>1</sup> [...,<sup>2</sup>...] 1  NAME 2  REFERENCE </pre>
<pre> \setpagestate [...]<sup>1</sup> [...]<sup>2</sup> 1  NAME 2  NAME NUMBER </pre>
<pre> \setpagestaterealpageno {...}<sup>1</sup> {...}<sup>2</sup> 1  NAME 2  NAME NUMBER </pre>
<pre> \setpenalties \... {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> 1  CSNAME 2  NUMMER 3  NUMMER </pre>

`\setpercentdimen {...} {...}`

- 1 DIMENSION CSNAME
- 2 DIMENSION NUMMER

`\setperiodkerning [...]`

- \* reset NAME

`\setposition {...}`

- \* NAME

`\setpositionbox {...} \^2... {...}`

- 1 NAME
- 2 CSNAME
- 3 CONTENT

`\setpositiondata {...} {...} {...} {...}`

- 1 NAME
- 2 DIMENSION
- 3 DIMENSION
- 4 DIMENSION

`\setpositiondataplus {...} {...} {...} {...} {...,5...}`

- 1 NAME
- 2 DIMENSION
- 3 DIMENSION
- 4 DIMENSION
- 5 TEXT

`\setpositiononly {...}`

- \* NAME

`\setpositionplus {...} {...,2...} \^3... {...}`

- 1 NAME
- 2 TEXT
- 3 CSNAME
- 4 CONTENT

`\setpositionstrut {...}`

- \* NAME

`\setprofile [...]`

- \* niciunul fixat strict halffixed quarterfixed eightsfixed NAME

`\setrandomseed {...}`

- \* NUMMER

`\setreference [...,1...] [...,2...,...]`

- 1 REFERENCE
- 2 KEY = VALUE

`\setreferencedobject {...} {...} \^3... {...}`

- 1 NAME
- 2 NAME
- 3 CSNAME
- 4 CONTENT

<pre> \setregisterentry [...] [...] [...] 1  NAME 2  eticheta    = NAME     keys       = TEXT PROCESSOR-&gt;TEXT     entries    = TEXT PROCESSOR-&gt;TEXT     keys:1     = TEXT     keys:2     = TEXT     keys:3     = TEXT     entries:1  = TEXT     entries:2  = TEXT     entries:3  = TEXT     alternativ  = TEXT 3  KEY = VALUE </pre>
<pre> \setreplacement [...] *  reset NAME </pre>
<pre> \setrigidcolumnbalance ... *  CSNAME NUMBER </pre>
<pre> \setrigidcolumnhsize {...} {...} {...} 1  DIMENSION 2  DIMENSION 3  NUMMER </pre>
<pre> \setscript [...] *  hangul hanzi nihongo ethiopic thai test NAME </pre>
<pre> \setsecondpasscharacteralign </pre>
<pre> \setsectionblock [...] [...] 1  NAME 2  semncarte = TEXT </pre>
<pre> \setsimplecolumnhsize [...,...*,...] *  n      = NUMMER     latime = DIMENSION     distanta = DIMENSION     linii  = NUMMER </pre>
<pre> \setsmallbodyfont </pre>
<pre> \setsmallcaps </pre>
<pre> \setstackbox {...} {...} {...} 1  NAME 2  NAME 3  CONTENT </pre>
<pre> \setstructurepageregister [...] [...] [...] 1  NAME 2  eticheta    = NAME     keys       = TEXT PROCESSOR-&gt;TEXT     entries    = TEXT PROCESSOR-&gt;TEXT     keys:1     = TEXT     keys:2     = TEXT     keys:3     = TEXT     entries:1  = TEXT     entries:2  = TEXT     entries:3  = TEXT     alternativ  = TEXT 3  KEY = VALUE </pre>
<pre> \setstrut </pre>

<code>\setsuperiors</code>
<code>\setsystemmode {...}</code> *    NAME
<code>\settabular</code>
<code>\settaggedmetadata [...,...*...,...]</code> *    KEY   =   VALUE
<code>\settextcontent [...<sup>1</sup>.] [...<sup>2</sup>.] [...<sup>3</sup>.] [...<sup>4</sup>.] [...<sup>5</sup>.]</code> 1    sus antet text subsol subsol                    OPT                    OPT 2    text margine bordura 3    stanga centru dreapta 4    data numarpagina BESCHRIFTUNG TEXT BEFEHL 5    data numarpagina BESCHRIFTUNG TEXT BEFEHL
<code>\settightobject {...<sup>1</sup>.} {...<sup>2</sup>.} \...<sup>3</sup>. {...<sup>4</sup>.}</code> 1    NAME 2    NAME 3    CSNAME 4    CONTENT
<code>\settightreferencedobject {...<sup>1</sup>.} {...<sup>2</sup>.} \...<sup>3</sup>. {...<sup>4</sup>.}</code> 1    NAME 2    NAME 3    CSNAME 4    CONTENT
<code>\settightstrut</code>
<code>\settightunreferencedobject {...<sup>1</sup>.} {...<sup>2</sup>.} \...<sup>3</sup>. {...<sup>4</sup>.}</code> 1    NAME 2    NAME 3    CSNAME 4    CONTENT
<code>\settokenlist [...<sup>1</sup>.] {...<sup>2</sup>.}</code> 1    NAME 2    TEXT
<code>\settrialtypesetting</code>
<code>\setuevalue {...<sup>1</sup>.} {...<sup>2</sup>.}</code> 1    NAME 2    CONTENT
<code>\setugvalue {...<sup>1</sup>.} {...<sup>2</sup>.}</code> 1    NAME 2    CONTENT
<code>\setunreferencedobject {...<sup>1</sup>.} {...<sup>2</sup>.} \...<sup>3</sup>. {...<sup>4</sup>.}</code> 1    NAME 2    NAME 3    CSNAME 4    CONTENT
<code>\setupalternativestyles [...,...*...,...]</code> *    metoda   =   normal auto

\setupattachment [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 titlu = TEXT  
subtitlu = TEXT  
autor = TEXT  
fisier = FILE  
nume = NAME  
buffer = BUFFER  
stare = start stop  
metoda = normal ascuns  
simbol = Graph Paperclip Pushpin Default  
latime = ajustat DIMENSION  
inaltime = ajustat DIMENSION  
inaltime = ajustat DIMENSION  
culoare = COLOR  
textlayer = NAME  
locatie = bordurastanga borduradreaapta inmarginestanga marginedreaapta text inalt niciunul  
distanta = DIMENSION

\setupattachments [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 inherits: \setupattachment

\setupbackend [...<sup>\*</sup>,...]

\* export = da FILE  
xhtml = FILE  
fisier = FILE  
intent = Coated\_FOGRA39(ISO\_12647-2:2004) GRACoL2006\_Coated1v2.icc ISO\_Coated\_v2\_300 ISO\_Coated\_v2\_(ECI)  
ISOnewspaper26v4 ISOnewspaper26v4\_gr ISO\_Uncoated ISO\_Uncoated\_Yellowish ISO\_Web\_Coated Japan\_Color\_2001\_Coated  
Japan\_Color\_2002\_Newspaper Japan\_Web\_Coated(Ad) SNAP\_2007 SWOP2006\_Coated3v2.icc SWOP2006\_Coated5v2.icc  
Uncoated\_FOGRA29(ISO\_12647-2:2004) Web\_Coated\_FOGRA28(ISO\_12647-2:2004) PSR\_LWC\_PLUS\_V2\_PT PSR\_LWC\_STD\_V2\_PT  
PSR\_SC\_PLUS\_V2\_PT PSR\_SC\_STD\_V2\_PT PSRgravureMF  
spatiu = da nu  
xmpfile = FILE  
format = version implicit PDF/X-1a:2001 PDF/X-1a:2003 PDF/X-3:2002 PDF/X-3:2003 PDF/X-4 PDF/X-4p PDF/X-5g  
PDF/X-5pg PDF/X-5n PDF/A-1a:2005 PDF/A-1b:2005 PDF/A-2a PDF/A-3a PDF/UA-1  
nivel = NUMMER  
optiune = totdeauna niciodata  
profile = FILE

\setupbar [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 culoare = COLOR  
continua = da nu tot  
gol = da nu  
unitate = ex em pt in cm mm sp bp pc dd cc nc  
order = primplan fundal  
grosimerigla = DIMENSION  
metoda = NUMMER  
offset = NUMMER  
dy = NUMMER  
max = NUMMER  
foregroundstyle = STYLE BEFEHL  
foregroundcolor = COLOR  
mp = NAME  
stanga = TEXT  
dreapta = TEXT

\setupbars [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 inherits: \setupbar

\setupbleeding [...<sup>\*</sup>,...]

\* latime = DIMENSION  
inaltime = DIMENSION  
offset = DIMENSION  
hoffset = DIMENSION  
voffset = DIMENSION  
locatie = t b l r bl lb br rb tl lt tr rt  
dilatata = da nu  
pagina = da nu

```

\setupbookmark [...,..1...,...]
*   fortat           = da nu
    numar            = da nu
    numberseparatorset = NAME
    numberconversionset = NAME
    numberstarter     = BEFEHL
    numberstopper     = BEFEHL
    numbersegments    = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:* ABSCHNITT:tot
    sectionblock      = da nu

```

```

\setupbtx [...,..1...,..2...,...]
1   NAME             OPT
2   specification     = implicit apa aps NAME
    dataset           = implicit NAME
    comanda           = \...##1
    stanga            = BEFEHL
    dreapta           = BEFEHL
    authorconversion   = normal normalshort normalinverted invertedshort short
    etallimit         = NUMBER
    etaldisplay        = NUMBER
    etaloption        = ultim
    stopper           = initials
    interactiune       = start stop numar text pagina tot
    alternativ          = implicit category entry short pagina num textnum an index tag keywords autor authoryears
                       authornum authoryear
    sorttype          = normal reverse
    compress           = da nu
    implicit           = implicit NAME
    stil              = STYLE BEFEHL
    culoare           = COLOR

```

```

\setupbtxdataset [...,..1...,..2...,...]
1   NAME             OPT
2   language          = SPRACHE

```

```

\setupbtxlist [...,..1...,..2...,...]
1   NAME             OPT
2   inherits: \seteazalista

```

```

\setupbtxregister [...,..1...,..2...,...]
1   NAME             OPT
2   stare             = start stop
    dataset           = NAME
    field             = keyword range numarpagina autor
    register          = NAME
    metoda            = once
    alternativ          = normalshort invertedshort
    stil              = STYLE BEFEHL
    culoare           = COLOR

```

```

\setupbtxrendering [...,..1...,..2...,...]
1   NAME             OPT
2   staretext         = start stop
    pagestate         = start stop
    separator         = BEFEHL
    criteriu          = precedent cite aici tot niciunul
    filter             = TEXT
    specification     = NAME
    titlu             = TEXT
    inainte           = BEFEHL
    dupa              = BEFEHL
    dataset           = NAME
    metoda            = dataset fortat local global niciunul
    sorttype          = short dataset lista referinta folosit implicit cite index
    repeta            = da nu
    group             = NAME
    numerotare        = da nu num index tag short pagina

```

```

\setupbtx [...,..1...,..2...,...]
*   NAME

```

**\setupbutton** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 stare = start stop  
aceeasipagina = da nu gol niciunul normal implicit  
stil = STYLE BEFEHL  
culoare = COLOR  
culoarecontrast = COLOR  
alternativ = ascuns  
inherits: \seteazainconjurat

**\setupcharacteralign** [...<sup>\*</sup>,...]

\* latimestanga = DIMENSION  
marginedreapta = DIMENSION  
leftsample = TEXT  
rightsample = TEXT  
character = TEXT number->TEXT text->TEXT

**\setupcharacterkerning** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 factor = max NUMMER  
latime = DIMENSION  
features = NAME  
stil = STYLE BEFEHL  
culoare = COLOR

**\setupcharacterspacing** [...<sup>1</sup>] [...<sup>2</sup>] [...<sup>3</sup>,...]

1 NAME OPT  
2 NUMMER  
3 stanga = NUMMER  
dreapta = NUMMER  
alternativ = 0 1

**\setupchemical** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 strut = da nu auto cap ajustat linie implicit CHARACTER  
latime = ajustat niciunul NUMMER  
inaltime = ajustat niciunul NUMMER  
stanga = ajustat niciunul NUMMER  
dreapta = ajustat niciunul NUMMER  
sus = ajustat niciunul NUMMER  
jos = ajustat niciunul NUMMER  
scala = mic mediu mare normal NUMMER  
rotatie = NUMMER  
symaliniere = auto  
axa = on dezactivat  
culoareframe = COLOR  
grosimerigla = DIMENSION  
offset = DIMENSION  
unitate = DIMENSION  
factor = NUMMER  
frame = on dezactivat  
culoarerigla = COLOR  
fonttext = inherits: \seteazafonttext  
dimensiune = mic mediu mare  
stil = STYLE BEFEHL  
culoare = COLOR

**\setupchemicalframed** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 inherits: \seteazainconjurat

**\setupcollector** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 rotatie = stanga dreapta intern extern NUMMER  
colt = stanga centru dreapta sus subsol  
x = DIMENSION  
y = DIMENSION  
hoffset = DIMENSION  
voffset = DIMENSION  
locatie = stanga centru dreapta sus subsol linie l c r m t b g  
stare = start stop



**\setupcolumnset** [...<sup>1</sup>...] [...<sup>2</sup>...]

1 NAME NAME:NUMBER OPT  
2 n = NUMBER  
nstanga = NUMBER  
ndreapta = NUMBER  
latime = DIMENSION auto  
distanta = DIMENSION  
linii = NUMBER  
latimemaxima = DIMENSION  
inaltimemaxima = DIMENSION  
directie = normal reverse  
pagina = inherits: \pagina  
inherits: \seteazainconjurat

**\setupcolumnsetarea** [...<sup>1</sup>...] [...<sup>2</sup>...]

1 NAME OPT  
2 stare = start stop repetat  
x = NUMBER  
y = NUMBER  
nx = NUMBER  
ny = NUMBER  
stil = STYLE BEFEHL  
culoare = COLOR  
clipoffset = DIMENSION  
offsetdreapta = DIMENSION  
inherits: \seteazainconjurat

**\setupcolumnsetareatext** [...<sup>1</sup>] [...<sup>2</sup>]

1 NAME  
2 TEXT

**\setupcolumnsetlines** [...<sup>1</sup>] [...<sup>2</sup>] [...<sup>3</sup>] [...<sup>4</sup>]

1 NAME  
2 NUMMER  
3 NUMMER  
4 NUMMER

**\setupcolumnsetspan** [...<sup>1</sup>...] [...<sup>2</sup>...]

1 NAME OPT  
2 n = NUMBER  
stil = STYLE BEFEHL  
culoare = COLOR  
inainte = BEFEHL  
dupa = BEFEHL  
inherits: \seteazainconjurat

**\setupcolumnsetstart** [...<sup>1</sup>] [...<sup>2</sup>] [...<sup>3</sup>] [...<sup>4</sup>]

1 NAME  
2 NUMMER  
3 NUMMER  
4 NUMMER

**\setupcolumnspan** [...<sup>\*</sup>...]

\* n = NUMMER  
inherits: \seteazainconjurat

**\setupcombination** [...<sup>1</sup>...] [...<sup>2</sup>...]

1 NAME OPT  
2 nx = NUMBER  
ny = NUMBER  
latime = ajustat DIMENSION  
inaltime = ajustat DIMENSION  
locatie = stanga centru dreapta sus subsol  
distanta = DIMENSION  
alternativ = eticheta text  
alinie = inherits: \seteazaalinie  
continua = da nu  
inainte = BEFEHL  
dupa = BEFEHL  
intre = BEFEHL  
stil = STYLE BEFEHL  
culoare = COLOR

\setupcounter [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

```

1  NAME OPT
2  start = NUMBER
   counter = NAME
   metoda = pagina
   stare = start stop
   mod = bypagina byblock bytext byantet byABSCHNITT
   prefix = da nu
   prefixseparatorset = NAME
   prefixconversion = NAME
   prefixconversionset = NAME
   prefixstarter = BEFEHL PROCESSOR->BEFEHL
   prefixstopper = BEFEHL PROCESSOR->BEFEHL
   prefixset = NAME
   prefixsegments = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:* ABSCHNITT:tot
                     curent
   numberorder = reverse
   numberseparatorset = NAME
   numberconversion = NAME
   numberconversionset = NAME
   numberstarter = BEFEHL PROCESSOR->BEFEHL
   numberstopper = BEFEHL PROCESSOR->BEFEHL
   numbersegments = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:tot
   type = primul precedent urmatorul ultim numar
   criteriu = strict pozitiv tot
   prefixconnector = BEFEHL PROCESSOR->BEFEHL

```

\setupdataset [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

```

1  NAME OPT
2  intarziere = da nu

```

\setupdelimitedtext [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

```

1  NAME NAME:NUMBER OPT
2  inainte = BEFEHL
   dupa = BEFEHL
   language = local global SPRACHE
   metoda = font
   repeta = da nu
   locatie = text paragraf margine
   stanga = BEFEHL
   mijloc = BEFEHL
   dreapta = BEFEHL
   nextleft = BEFEHL
   nextright = BEFEHL
   spatiuinainte = inherits: \blanc
   spatiudupa = inherits: \blanc
   marginestanga = da nu standard DIMENSION
   marginedreapta = da nu standard DIMENSION
   aliniat = inherits: \seteazaaliniat
   aliniaturmator = da nu auto
   stil = STYLE BEFEHL
   culoare = COLOR
   stilsimbol = STYLE BEFEHL
   culoaresimbol = COLOR

```

**\setupdescription** [ $\dots^1, \dots$ ] [ $\dots^2, \dots$ ]

1 NAME OPT  
2 titlu = da nu  
nivel = NUMBER  
text = TEXT  
headcommand = \...##1  
inainte = BEFEHL  
dupa = BEFEHL  
intre = BEFEHL  
alternativ = stanga dreapta inmargine instanga indreapta margine marginestanga marginedreapta innermargin  
outermargin serried suspendat sus gol comanda NAME  
aliniere = inherits: \seteazaalinierea  
headalign = inherits: \seteazaalinierea  
aliniat = inherits: \seteazaaliniat  
display = da nu  
aliniaturmator = da nu auto  
latime = ajustat broad linie DIMENSION  
distanta = niciunul DIMENSION  
dilatata = NUMBER  
shrink = NUMBER  
suspenda = ajustat broad niciunul margine NUMBER  
closesymbol = BEFEHL  
closecommand = \...##1  
expansiune = da nu xml  
referenceprefix = + - TEXT  
exemplu = TEXT  
margine = da nu standard DIMENSION  
stil = STYLE BEFEHL  
culoare = COLOR  
stiltitlu = STYLE BEFEHL  
culoaretitlu = COLOR  
alinieretitlu = da nu

**\setupdirections** [ $\dots^*, \dots$ ]

\* bidi = on dezactivat local global  
metoda = unu doi implicit  
fences = da nu  
break = ambele inainte

**\setupdocument** [ $\dots^*, \dots$ ]

\* inainte = BEFEHL  
dupa = BEFEHL  
metadata:author = TEXT  
metadata:title = TEXT  
metadata:subject = TEXT  
metadata:keywords = TEXT  
KEY = VALUE

**\setupeffect** [ $\dots^1, \dots$ ] [ $\dots^2, \dots$ ]

1 NAME OPT  
2 metoda = niciunul comanda  
dilatata = NUMBER  
grosimerigla = DIMENSION  
alternativ = normal intern extern ambele ascuns dilatata

\setupenumeration [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

```

1  NAME                                OPT
2  titlu                               = da nu
   numar                               = da nu
   comandanumar                        = \...##1
   distantatitlu                       = DIMENSION
   stiltitlu                           = STYLE BEFEHL
   culoaretitlu                        = COLOR
   titlecommand                        = \...##1
   titleleft                           = BEFEHL
   titleright                           = BEFEHL
   stanga                               = BEFEHL
   dreapta                              = BEFEHL
   simbol                               = BEFEHL
   starter                             = BEFEHL
   stopper                             = BEFEHL
   cuplare                              = NAME
   counter                             = NAME
   nivel                               = NUMMER
   text                                = TEXT
   headcommand                         = \...##1
   inainte                              = BEFEHL
   dupa                                 = BEFEHL
   intre                               = BEFEHL
   alternativ                           = stanga dreapta inmargin instanga indreapta margine marginestanga marginedreapta innermargin
                                     outermargin serried suspendat sus gol comanda NAME
   aliniere                             = inherits: \seteazaalinierea
   headalign                            = inherits: \seteazaalinierea
   aliniat                              = inherits: \seteazaaliniat
   display                              = da nu
   aliniaturmator                       = da nu auto
   latime                               = ajustat broad linie DIMENSION
   distanta                             = niciunul DIMENSION
   dilatat                              = NUMMER
   shrink                               = NUMMER
   suspenda                             = ajustat broad niciunul margine NUMMER
   closesymbol                          = BEFEHL
   closecommand                         = \...##1
   expansiune                           = da nu xml
   referenceprefix                      = + - TEXT
   exemplu                              = TEXT
   margine                              = da nu standard DIMENSION
   stil                                 = STYLE BEFEHL
   culoare                              = COLOR
   stiltitlu                            = STYLE BEFEHL
   culoaretitlu                         = COLOR
   alinieretitlu                        = da nu
   inherits: \setupcounter

```

\setupenv [...,\*...,...]

```

*  set      = BEFEHL
   reset    = BEFEHL
   KEY      = VALUE

```

\setupexport [...,\*...,...]

```

*  aliniere      = flushleft centru flushright normal
   fonttext      = DIMENSION
   latime        = DIMENSION
   titlu         = TEXT
   subtitlu      = TEXT
   autor         = TEXT
   alternativ      = html div
   properties    = da nu
   hyphen        = da nu
   cssfile       = FILE
   primapagina   = FILE
   ultimapagina  = FILE

```

`\setupexternalfigure [...,1...] [...,2...,...]`

```

1  NAME                                OPT
2  latime                             = DIMENSION
   inaltime                           = DIMENSION
   eticheta                            = NAME
   pagina                             = NUMMER
   obiect                              = da nu
   prefix                             = TEXT
   metoda                             = pdf mps jpg png jp2 jbig svg eps gif tif mov buffer tex cld auto
   controale                           = da nu
   previzualizare                     = da nu
   mask                               = niciunul
   rezolutie                           = NUMMER
   culoare                             = COLOR
   arguments                           = TEXT
   repeta                              = da nu
   factor                             = ajustat broad max auto implicit
   hfactor                             = ajustat broad max auto implicit
   factorw                             = ajustat broad max auto implicit
   latimemaxima                       = DIMENSION
   inaltimemaxima                     = DIMENSION
   equalwidth                          = DIMENSION
   equalheight                         = DIMENSION
   scala                              = NUMMER
   xscala                             = NUMMER
   yscala                             = NUMMER
   s                                  = NUMMER
   sx                                  = NUMMER
   sy                                  = NUMMER
   linii                              = NUMMER
   locatie                             = local global implicit
   director                           = PATH
   optiune                             = test incadrat gol
   foregroundcolor                     = COLOR
   reset                              = da nu
   fundal                             = culoare primplan NAME
   frame                              = on dezactivat
   culoarefundal                       = COLOR
   xmax                               = NUMMER
   ymax                               = NUMMER
   frames                             = on dezactivat
   interactiune                        = da tot niciunul referinta layer semncarte
   fonttext                           = DIMENSION
   comment                             = BEFEHL TEXT
   dimensiune                          = niciunul media crop trim art
   cache                              = PATH
   resources                           = PATH
   display                             = FILE
   conversie                           = TEXT
   order                              = LISTE
   crossreference                       = da nu NUMMER
   transform                           = auto NUMMER
   userpassword                         = TEXT
   ownerpassword                       = TEXT

```

`\setupexternalsoundtracks [...,*...,...]`

`* optiune = repetat`

`\setupfacingfloat [...,1...] [...,2...,...]`

```

1  NAME                                OPT
2  intre                             = BEFEHL
   pagina                             = inherits: \pagina
   spaceinbetween                     = inherits: \blanc
   stil                               = STYLE BEFEHL
   culoare                             = COLOR
   inherits: \seteazainconjurat

```

`\setupfieldbody [...,1...] [...,2...,...]`

```

1  NAME                                OPT
2  category = NAME
   inherits: \setupfieldcategory

```

`\setupfieldcategory [...1,...] [...2...]`

```
1 NAME OPT
2 start = NUMMER
  stil = STYLE BEFEHL
  culoare = COLOR
  type = radio sub text linie push check signature
  values = TEXT
  implicit = TEXT
  culoareframecamp = COLOR
  culoarefundalcamp = COLOR
  latime = DIMENSION
  inaltime = DIMENSION
  inaltime = DIMENSION
  aliniere = stanga centru dreapta flushleft center flushright
  n = NUMMER
  simbol = NAME
  fieldlayer = NAME
  optiune = readonly obligatoriu protejat sortat nedisponibil nocheck fixat fisier ascuns tiparibil auto
  clickintru = REFERENCE
  clickies = REFERENCE
  regiuneintrare = REFERENCE
  regiuneiesire = REFERENCE
  dupatasta = REFERENCE
  format = REFERENCE
  verifica = REFERENCE
  calculeaza = REFERENCE
  focusin = REFERENCE
  focusout = REFERENCE
  openpage = REFERENCE
  closepage = REFERENCE
```

`\setupfieldcontentframed [...1,...] [...2...]`

```
1 NAME OPT
2 inherits: \seteazainconjuratinherits: \setupfieldcategory
```

`\setupfieldlabelframed [...1,...] [...2...]`

```
1 NAME OPT
2 inherits: \seteazainconjurat
```

`\setupfieldtotalframed [...1,...] [...2...]`

```
1 NAME OPT
2 inainte = BEFEHL
  dupa = BEFEHL
  intre = BEFEHL
  distanta = DIMENSION
  alternativ = reset eticheta incadrat orizontal vertical
  inherits: \seteazainconjurat
```

`\setupfiller [...1,...] [...2...]`

```
1 NAME OPT
2 marginestanga = DIMENSION
  marginedreapta = DIMENSION
  stanga = BEFEHL
  dreapta = BEFEHL
  alternativ = simbol dilatat rigla spatiu
  metoda = local global centru broad
  latime = DIMENSION
  inaltime = DIMENSION
  inaltime = DIMENSION
  offset = DIMENSION
  distanta = DIMENSION
  aliniere = stanga dreapta centru flushleft flushright intern extern
  simbol = BEFEHL
  stil = STYLE BEFEHL
  culoare = COLOR
```

`\setupfirstline [...1,...] [...2...]`

```
1 NAME OPT
2 n = NUMMER
  alternativ = implicit linie cuvant
  stil = STYLE BEFEHL
  culoare = COLOR
```

\setupfittingpage [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

1 NAME OPT  
2 pagestate = start stop  
comanda = \...##1  
margine = pagina  
scala = NUMMER  
hartie = auto implicit NAME  
inherits: \seteazainconjurat

\setupfloatframed [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

1 NAME OPT  
2 inherits: \seteazainconjurat

\setupfontexpansion [...<sup>1</sup>...] [...,<sup>2</sup>...,...]

1 NAME  
2 vector = NAME  
factor = NUMMER  
dilatat = NUMMER  
shrink = NUMMER  
pas = NUMMER

\setupfontprotrusion [...<sup>1</sup>...] [...,<sup>2</sup>...,...]

1 NAME  
2 vector = NAME  
factor = NUMMER  
stanga = NUMMER  
dreapta = NUMMER

\setupfonts [...,<sup>\*</sup>...,...]

\* language = nu auto

\setupfontsolution [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

1 NAME OPT  
2 goodies = FILE  
solution = NAME  
less = NAME  
more = NAME  
metoda = preroll split normal reverse aleator  
criteriu = NUMMER

\setupformula [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

1 NAME OPT  
2 locatie = stanga dreapta  
alinie = stanga centru dreapta flushleft center flushright normal  
split = da nu pagina  
strut = da nu  
distanta = DIMENSION  
stanga = BEFEHL  
dreapta = BEFEHL  
spatiuinainte = inherits: \blanc  
spatiudupa = inherits: \blanc  
comandanumar = \...##1  
culoare = COLOR  
stilnumar = STYLE BEFEHL  
culoarenumar = COLOR  
optiune = impachetat tight centru incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext  
margine = da nu standard DIMENSION  
marginestanga = DIMENSION  
marginedreapta = DIMENSION  
alternativ = NAME  
aliniaturmator = da nu auto  
grid = inherits: \snaptogrid  
frame = numar  
suspenda = niciunul auto  
expansiune = da nu xml  
referenceprefix = + - TEXT  
xmlsetup = NAME  
catcodes = NAME  
inherits: \setupcounter

<pre> \setupformulaframed [...<sup>1</sup>,...] [...<sup>2</sup>...,...] 1  NAME                      OPT 2  inherits: \seteazainconjurat </pre>
<pre> \setupframedcontent [...<sup>1</sup>,...] [...<sup>2</sup>...,...] 1  NAME                      OPT 2  stanga                    = BEFEHL    dreapta                  = BEFEHL    leftoffser               = DIMENSION    offsetdreapta            = DIMENSION    offsetsus                = DIMENSION    offsetjos                = DIMENSION    corectielinie            = da nu    inherits: \seteazainconjurat </pre>
<pre> \setupframedtable [...<sup>1</sup>] [...<sup>2</sup>...,...] 1  NAME                      OPT 2  inainte                  = BEFEHL    dupa                    = BEFEHL    intre                   = BEFEHL    distanta                = DIMENSION    inherits: \seteazainconjurat </pre>
<pre> \setupframedtablecolumn [...<sup>1</sup>] [...<sup>2</sup>] [...<sup>3</sup>...,...] 1  NAME                      OPT 2  NUMMER fiecare 3  inherits: \seteazainconjurat </pre>
<pre> \setupframedtablerow [...<sup>1</sup>] [...<sup>2</sup>] [...<sup>3</sup>...,...] 1  NAME                      OPT 2  NUMMER fiecare 3  inherits: \seteazainconjurat </pre>
<pre> \setupframedtext [...<sup>1</sup>,...] [...<sup>2</sup>...,...] 1  NAME                      OPT 2  stanga                    = BEFEHL    dreapta                  = BEFEHL    intern                   = BEFEHL    locatie                  = stanga dreapta centru niciunul    corectieadancime         = on dezactivat    fonttext                 = inherits: \seteazafonttext    aliniat                  = inherits: \seteazaaliniat    stil                     = STYLE BEFEHL    culoare                  = COLOR    inherits: \seteazainconjuratinherits: \setupplacement </pre>
<pre> \setupglobalreferenceprefix [...<sup>*</sup>] *  + - TEXT </pre>
<pre> \setupheadalternative [...<sup>1</sup>,...] [...<sup>2</sup>...,...] 1  NAME                      OPT 2  alternativ                = orizontal vertical undeva    renderingsetup          = NAME </pre>
<pre> \setuphelp [...<sup>1</sup>,...] [...<sup>2</sup>...,...] 1  NAME                      OPT 2  inherits: \seteazainconjurat </pre>
<pre> \setuphigh [...<sup>1</sup>,...] [...<sup>2</sup>...,...] 1  NAME                      OPT 2  distanta                = DIMENSION    up                     = DIMENSION    stil                    = STYLE BEFEHL    culoare                 = COLOR </pre>



`\setuphighlight [...1,...] [...2,...]`

1 NAME OPT  
2 comanda = da nu  
stil = STYLE BEFEHL  
culoare = COLOR

`\setuphyphenation [...*,...]`

\* metoda = original tex implicit hyphenate expanded traditional niciunul

`\setupindentedtext [...1,...] [...2,...]`

1 NAME OPT  
2 inainte = BEFEHL  
dupa = BEFEHL  
distanta = DIMENSION  
exemplu = TEXT  
text = TEXT  
latime = ajustat broad DIMENSION  
separator = BEFEHL  
stil = STYLE BEFEHL  
culoare = COLOR  
stiltitlu = STYLE BEFEHL  
culoaretitlu = COLOR

`\setupinitial [...1,...] [...2,...]`

1 NAME OPT  
2 n = NUMMER  
m = NUMMER  
inainte = BEFEHL  
distanta = DIMENSION  
hoffset = DIMENSION  
voffset = linie DIMENSION  
stil = STYLE BEFEHL  
culoare = COLOR  
font = FONT  
text = TEXT  
locatie = margine text  
metoda = primul ultim auto niciunul

`\setupinsertion [...1,...] [...2,...]`

1 NAME OPT  
2 locatie = pagina text coloane firstcolumn lastcolumn

`\setupitaliccorrection [...*,...]`

\* text totdeauna global niciunul

```

\setupitemgroup [...]1 [...]2 [...]3 [...]4
1 NAME OPT OPT OPT
2 fiecare NUMMER
3 intro aleator continuu impachetat autointro broad text inainte dupa faraalb margine inmargine lamargine intext
larg ajustat nofit paragraf unit serried stopper nostopper despachetat repetat norepeat reverse coloane unu doi
trei patru cinci six seven eight nine standard NUMMER*broad NUMMER*serried orizontal NAME
4 inainte = BEFEHL
dupa = BEFEHL
intre = BEFEHL
inaintetitlu = BEFEHL
dupatitlu = BEFEHL
textstanga = BEFEHL
textdreapta = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
factor = NUMMER
pas = DIMENSION
latime = DIMENSION
distanta = DIMENSION
margine = da nu standard DIMENSION
marginestanga = da nu standard DIMENSION
marginedreapta = da nu standard DIMENSION
aliniere = inherits: \seteazaalinierea
aliniat = inherits: \seteazaaliniat
start = NUMMER
symaliniere = stanga centru dreapta flushleft center flushright
simbol = NAME
n = NUMMER
aliniaturmator = da nu auto
intern = BEFEHL
comanda = CSNAME
elemente = NUMMER
latimemaxima = DIMENSION
itemalign = stanga dreapta centru flushleft flushright intern extern
alignsymbol = da nu
textdistance = mic mediu mare niciunul spatiu DIMENSION
punestopper = da nu
stil = STYLE BEFEHL
culoare = COLOR
stilititlu = STYLE BEFEHL
culoaretitlu = COLOR
stilmarcaj = STYLE BEFEHL
culoaremarcaj = COLOR
stilsimbol = STYLE BEFEHL
culoaresimbol = COLOR
grid = inherits: \definegridsnapping
inherits: \setupcounter

```

**\setupitemgroup** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```

1  NAME NAME:NUMBER      OPT
2  inainte                = BEFEHL
   dupa                   = BEFEHL
   intre                  = BEFEHL
   inaintetitlu           = BEFEHL
   dupatitlu              = BEFEHL
   textstanga             = BEFEHL
   textdreapta            = BEFEHL
   stanga                 = BEFEHL
   dreapta                = BEFEHL
   factor                 = NUMBER
   pas                    = DIMENSION
   latime                 = DIMENSION
   distanta               = DIMENSION
   optiune                = intro aleator continuu impachetat autointro broad text inainte dupa faraalb margine inmargine
                           lamargine intext larg ajustat nofit paragraf unit serried stopper despachetat repetat norepeat
                           reverse coloane unu doi trei patru cinci six seven eight nine standard NUMBER*broad NUMBER*serried
                           orizontal NAME
   margine                = da nu standard DIMENSION
   marginestanga          = da nu standard DIMENSION
   marginedreapta         = da nu standard DIMENSION
   aliniere               = inherits: \seteazaalinierea
   aliniat                = inherits: \seteazaaliniat
   start                  = NUMBER
   symaliniere            = stanga centru dreapta flushleft center flushright
   simbol                 = NAME
   n                      = NUMBER
   aliniaturmator         = da nu auto
   intern                 = BEFEHL
   comanda                = CSNAME
   elemente               = NUMBER
   latimemaxima           = DIMENSION
   itemalign              = stanga dreapta centru flushleft flushright intern extern
   alignsymbol            = da nu
   textdistance           = mic mediu mare niciunul spatiu DIMENSION
   punestopper            = da nu
   stil                   = STYLE BEFEHL
   culoare                = COLOR
   stiltitlu              = STYLE BEFEHL
   culoaretitlu           = COLOR
   stilmarcaj             = STYLE BEFEHL
   culoaremarcaj          = COLOR
   stilsimbol             = STYLE BEFEHL
   culoaresimbol          = COLOR
   grid                   = inherits: \definegridsnapping
inherits: \setupcounter

```

**\setareITEMGROUP** [...<sup>1</sup>,...] [...<sup>2</sup>,...] [...<sup>3</sup>,...]

```

1  fiecare NUMBER      OPT      OPT      OPT
2  inherits: \setupitemgroup
3  inherits: \setupitemgroup
instances: itemize

```

**\setareitemize** [...<sup>1</sup>,...] [...<sup>2</sup>,...] [...<sup>3</sup>,...]

```

1  fiecare NUMBER      OPT      OPT      OPT
2  inherits: \setupitemgroup
3  inherits: \setupitemgroup

```

**\setuplabel** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1	NAME	OPT
2	titlu	= da nu
	numar	= da nu
	comandanumar	= \...##1
	distantatitlu	= DIMENSION
	stiltitlu	= STYLE BEFEHL
	culoaretitlu	= COLOR
	titlecommand	= \...##1
	titleleft	= BEFEHL
	titleright	= BEFEHL
	stanga	= BEFEHL
	dreapta	= BEFEHL
	simbol	= BEFEHL
	starter	= BEFEHL
	stopper	= BEFEHL
	cuplare	= NAME
	counter	= NAME
	nivel	= NUMMER
	text	= TEXT
	headcommand	= \...##1
	inainte	= BEFEHL
	dupa	= BEFEHL
	intre	= BEFEHL
	alternativ	= stanga dreapta inmarginestanga indreapta marginedreapta innermargin outermargin serried suspendat sus gol comanda intext NAME
	alinie	= inherits: \seteazaalinie
	headalign	= inherits: \seteazaalinie
	aliniat	= inherits: \seteazaaliniat
	display	= da nu
	aliniaturmator	= da nu auto
	latime	= ajustat broad linie DIMENSION
	distanta	= niciunul DIMENSION
	dilatata	= NUMMER
	shrink	= NUMMER
	suspenda	= ajustat broad niciunul margine NUMMER
	closesymbol	= BEFEHL
	closecommand	= \...##1
	expansiune	= da nu xml
	referenceprefix	= + - TEXT
	exemplu	= TEXT
	margine	= da nu standard DIMENSION
	stil	= STYLE BEFEHL
	culoare	= COLOR
	stiltitlu	= STYLE BEFEHL
	culoaretitlu	= COLOR
	alinieretitlu	= da nu
	inherits:	\setupcounter

**\setuplayer** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1	NAME	OPT
2	stare	= start stop continuu urmatorul repetat
	optiune	= test
	pagina	= NUMMER
	latime	= DIMENSION
	inaltime	= DIMENSION
	region	= NAME
	rotatie	= stanga dreapta intern extern NUMMER
	pozitie	= da nu overlay
	hoffset	= max DIMENSION
	voffset	= max DIMENSION
	offset	= DIMENSION
	dx	= DIMENSION
	dy	= DIMENSION
	sx	= NUMMER
	sy	= NUMMER
	x	= DIMENSION
	y	= DIMENSION
	colt	= stanga centru dreapta sus subsol
	locatie	= grila stanga centru dreapta sus subsol linie l c r m t b g
	linie	= NUMMER
	coloana	= NUMMER
	directie	= normal reverse
	douafete	= da nu
	metoda	= ajustat overlay
	repeta	= da
	preset	= lefttop righttop leftbottom rightbottom centru middletop middlebottom middleleft middleright lefttoleft lefttopright NAME

`\setuplayeredtext [...,1...] [...,2...,...]`

```
1 NAME OPT
2 stil = STYLE BEFEHL
  culoare = COLOR
  inherits: \seteazainconjurat
```

`\setuplayouttext [...]1 [...]2 [...,3...,...]`

```
1 sus antet text subsol subsolOPT
2 text margine bordura
3 stare = start stop gol inalt niciunul normal faramarcare NAME
  stil = STYLE BEFEHL
  culoare = COLOR
  strut = da nu
  n = NUMMER
  inainte = BEFEHL
  dupa = BEFEHL
  stilstanga = STYLE BEFEHL
  stildreapta = STYLE BEFEHL
  culoarestanga = COLOR
  culoaredreapta = COLOR
  latime = DIMENSION
  latimestanga = DIMENSION
  marginedreapta = DIMENSION
```

`\setuplinefiller [...,1...] [...,2...,...]`

```
1 NAME OPT
2 locatie = stanga dreapta ambele
  scop = stanga dreapta local
  mp = NAME
  inaltime = DIMENSION
  inaltime = DIMENSION
  distanta = DIMENSION
  threshold = DIMENSION
  grosimerigla = DIMENSION
  inainte = BEFEHL
  dupa = BEFEHL
  culoare = COLOR
  stiltext = STYLE BEFEHL
  culoaretext = COLOR
  aliniere = inherits: \seteazaalinierea
```

`\setuplinefillers [...,1...] [...,2...,...]`

```
1 NAME OPT
2 inherits: \setuplinefiller
```

`\setuplinenote [...,1...] [...,2...,...]`

```
1 NAME OPT
2 compress = da nu
  compressmethod = separator stopper spatiu
  compressseparator = BEFEHL
  compressdistance = DIMENSION
  inherits: \setupnote
```

**\setuplinetable** [...<sup>1</sup>] [...<sup>2</sup>] [...,...<sup>3</sup>...,...]

```
1  r c          OPT      OPT
2  impar par antet NUMBER
3  linii        = ajustat NUMBER
   inainte      = BEFEHL
   dupa         = BEFEHL
   intre        = BEFEHL
   dilatata     = da nu DIMENSION
   latimemaxima = ajustat DIMENSION
   nstanga      = NUMBER
   n            = NUMBER
   repeta       = da nu
   nx           = NUMBER
   latime       = DIMENSION
   inaltime     = ajustat linie DIMENSION
   distanta     = DIMENSION
   offsetstanga = DIMENSION
   offsetdreapta = DIMENSION
   aliniere     = inherits: \seteazaalinierea
   fundal       = culoare
   culoarefundal = COLOR
   xheight      = max DIMENSION
   xdepth       = max DIMENSION
   stil         = STYLE BEFEHL
   culoare      = COLOR
```

**\setuplistalternative** [...<sup>1</sup>,...] [...,...<sup>2</sup>...,...]

```
1  NAME          OPT
2  inainte       = BEFEHL
   dupa          = BEFEHL
   comanda       = \...##1##2##3
   renderingsetup = NAME
   latime        = DIMENSION
   distanta      = DIMENSION
   dilatata      = DIMENSION
   filler        = BEFEHL
```

**\setuplistextra** [...<sup>1</sup>,...] [...,...<sup>2</sup>...,...]

```
1  NAME          OPT
2  inainte = BEFEHL
   dupa    = BEFEHL
```

**\setuplocalfloats** [...,...<sup>\*</sup>...,...]

```
*  inainte = BEFEHL
   dupa    = BEFEHL
   intre   = BEFEHL
```

**\setuplocalinterlinespace** [...<sup>1</sup>,...] [...,...<sup>2</sup>...,...]

```
1  NAME          OPT
2  inherits: \seteazaspatiuinterliniar
```

**\setuplocalinterlinespace** [...,<sup>\*</sup>...]

```
*  on dezactivat reset auto mic mediu mare OPT NUMBER DIMENSION
```

**\setuplocalinterlinespace** [...<sup>\*</sup>]

```
*  NAME
```

**\setuplow** [...<sup>1</sup>,...] [...,...<sup>2</sup>...,...]

```
1  NAME          OPT
2  distanta = DIMENSION
   down     = DIMENSION
   stil     = STYLE BEFEHL
   culoare  = COLOR
```

**\setuplowhigh** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```
1 NAME OPT
2 distanta = DIMENSION
  up       = DIMENSION
  down     = DIMENSION
  stil     = STYLE BEFEHL
  culoare  = COLOR
```

**\setuplowmidhigh** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```
1 NAME OPT
2 up      = DIMENSION
  down    = DIMENSION
  stil    = STYLE BEFEHL
  culoare = COLOR
```

**\setupMPgraphics** [...<sup>\*</sup>,...]

```
* culoare = local global
  mpy     = FILE
```

**\setupMPinstance** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```
1 NAME OPT
2 format      = metafun mpost
  initializations = da nu
  setups       = NAME
  stiltext     = STYLE BEFEHL
  culoaretext  = COLOR
  extensions   = da nu
  metoda      = binary decimal double scaled implicit
```

**\setupMPpage** [...<sup>\*</sup>,...]

```
* inherits: \setupfittingpage
```

**\setupMPvariables** [...<sup>1</sup>] [...<sup>2</sup>,...]

```
1 NAME OPT
2 KEY = VALUE
```

**\setupmarginblock** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```
1 NAME OPT
2 stare = start stop
  latime = DIMENSION
  inainte = BEFEHL
  dupa    = BEFEHL
  intre   = BEFEHL
  aliniere = inherits: \seteazaalinierea
  stil    = STYLE BEFEHL
  culoare = COLOR
  sus     = BEFEHL
  jos     = BEFEHL
  locatie = stanga dreapta centru inmarginie
  stanga  = BEFEHL
  dreapta = BEFEHL
```

```

\setupmargindata [...1,...] [...2,...]
1  NAME                      OPT
2  strut                    = da nu auto cap ajustat linie implicit CHARACTER
    comanda                 = \...#1
    latime                  = DIMENSION
    aliniere                = inherits: \seteazaalinierea
    anchor                  = region text
    locatie                 = stanga dreapta intern extern
    metoda                 = sus linie primul adancime inaltime
    category               = implicit bordura
    scop                    = local global
    optiune                 = text paragraf
    margine                 = local normal margine bordura
    distanta               = DIMENSION
    hoffset                 = DIMENSION
    voffset                 = DIMENSION
    dy                      = DIMENSION
    spatiu jos             = DIMENSION
    threshold              = DIMENSION
    linie                   = NUMMER
    stack                   = da continuu
    stil                    = STYLE BEFEHL
    culoare                 = COLOR

```

```

\setupmarginframed [...1,...] [...2,...]
1  NAME                      OPT
2  inherits: \seteazainconjurat

```

```

\setupmarginrule [...1,...] [...2,...]
1  NUMMER                   OPT
2  inherits: \setupsidebar

```

```

\setupmathalignment [...1,...] [...2,...]
1  NAME                      OPT
2  n                        = NUMMER
    m                      = NUMMER
    distanta               = DIMENSION
    numar                  = auto
    separator              = TEXT
    aliniere               = stanga centru dreapta normal
    locatie                = sus center subsol normal
    grid                   = math nu

```

```

\setupmathcases [...1,...] [...2,...]
1  NAME                      OPT
2  stanga                  = BEFEHL
    dreapta                = BEFEHL
    strut                  = da nu
    stil                   = STYLE BEFEHL
    distanta               = DIMENSION
    numberdistance         = DIMENSION

```



`\setupmathematics [...1,...] [...2,...]`

```

1 NAME OPT
2 openup = da nu
  setsymbol = NAME
  functionstyle = STYLE BEFEHL
  compact = da nu
  aliniere = l2r r2l righttoleft
  bidi = da nu
  sygreek = normal italic niciunul
  lcgreek = normal italic niciunul
  ucgreek = normal italic niciunul
  italics = 1 2 3 4 niciunul reset
  autopunctuation = da nu tot comma yes,semicolon comma,semicolon all,semicolon
  setups = NAME
  domain = NAME reset
  stiltext = STYLE BEFEHL
  culoaretext = COLOR
  functioncolor = COLOR
  integral = limits nolimits autolimits displaylimits niciunul
  stylealternative = NAME
  implicit = normal italic
  fraction = ams ctx
  ampersand = normal
  collapsing = 1 2 3 niciunul reset
  kernpairs = da nu

```

`\setupmathfence [...1,...] [...2,...]`

```

1 NAME OPT
2 comanda = da nu
  stanga = NUMMER
  mijloc = NUMMER
  dreapta = NUMMER
  mathstyle = display text script scriptscript cramped uncramped normal impachetat mic mare
  culoare = COLOR
  stare = auto
  metoda = auto
  dimensiune = NUMMER
  factor = niciunul auto NUMMER
  mathclass = NUMMER

```

`\setupmathfraction [...1,...] [...2,...]`

```

1 NAME OPT
2 distantasus = DIMENSION
  distantajos = DIMENSION
  margine = DIMENSION
  culoare = COLOR
  strut = da nu math tight
  alternativ = intern extern ambele
  rigla = da nu auto
  stanga = NUMMER
  dreapta = NUMMER
  grosimerigla = DIMENSION
  mathstyle = STYLE BEFEHL
  distanta = nu niciunul overlay
  inlinethreshold = auto NUMMER
  displaythreshold = auto NUMMER
  fences = NAME

```

`\setupmathfractions [...1,...] [...2,...]`

```

1 NAME OPT
2 inherits: \setupmathfraction

```

`\setupmathframed [...1,...] [...2,...]`

```

1 NAME OPT
2 inherits: \seteazainconjurat

```

```

\setupmathmatrix [...1,...] [...2,...]
1  NAME                OPT
2  stanga               = BEFEHL
   dreapta             = BEFEHL
   strut               = da nu NUMMER
   aliniere            = stanga centru dreapta normal
   stil                = STYLE BEFEHL
   distanta            = DIMENSION
   simplecommand       = TEXT
   locatie             = sus subsol inalt jos lohi normal

```

```

\setupmathornament [...1,...] [...2,...]
1  NAME                OPT
2  alternativ            = mp
   culoare              = COLOR
   mpoffset             = DIMENSION
   mp                  = NAME

```

```

\setupmathradical [...1,...] [...2,...]
1  NAME                OPT
2  alternativ            = implicit normal mp
   culoare              = COLOR
   mpoffset             = DIMENSION
   mp                  = NAME

```

```

\setupmathstackers [...1,...] [...2,...]
1  NAME                OPT
2  stanga               = BEFEHL
   dreapta             = BEFEHL
   topcommand           = \...##1
   bottomcommand        = \...##1
   middlecommand        = \...##1
   mp                  = NAME
   mpheight             = DIMENSION
   mpdepth              = DIMENSION
   mpoffset             = DIMENSION
   culoare              = COLOR
   hoffset              = DIMENSION
   voffset              = DIMENSION
   inaltiminima         = DIMENSION
   mindepth             = DIMENSION
   mathclass            = rel ord
   offset               = min max normal
   locatie              = sus subsol inalt jos centru NUMMER
   strut               = da nu
   alternativ            = normal implicit mp
   latiminima           = DIMENSION
   distanta             = DIMENSION
   moffset              = DIMENSION
   order                = normal reverse
   mathlimits           = da nu

```

```

\setupmathstyle [...*,...]
*  display text script scriptscript cramped uncramped normal impachetat mic mare NAME

```

```
\setupmixedcolumns [...1,...] [...2,...]
```

```
1 NAME OPT
2 grid = inherits: \definegridsnapping
  grosimerigla = DIMENSION
  metoda = otr box
  inainte = BEFEHL
  dupa = BEFEHL
  distanta = DIMENSION
  n = NUMMER
  inaltimemaxima = DIMENSION
  latimemaxima = DIMENSION
  pas = DIMENSION
  profile = NAME
  aliniere = inherits: \seteazaalinierea
  setups = NAME
  balanta = da nu
  splitmethod = niciunul fixat
  alternativ = local global
  internalgrid = linie jumatatelinie
  separator = rigla
  strut = da nu
  culoare = COLOR
  culoarerigla = COLOR
  directie = normal reverse
  inherits: \seteazainconjurat
```

```
\setupmodule [...1] [...2,...]
```

```
1 FILE OPT
2 test = da nu
  KEY = VALUE
```

\setupnotation [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```

1  NAME                      OPT
2  titlu                     = da nu
   numar                     = da nu
   type                       = note
   comandanumar              = \...##1
   distantatitlu             = DIMENSION
   stiltitlu                  = STYLE BEFEHL
   culoaretitlu              = COLOR
   titlecommand              = \...##1
   titleleft                  = BEFEHL
   titleright                 = BEFEHL
   stanga                     = BEFEHL
   dreapta                    = BEFEHL
   simbol                     = BEFEHL
   starter                    = BEFEHL
   stopper                    = BEFEHL
   cuplare                    = NAME
   counter                    = NAME
   nivel                      = NUMMER
   text                       = TEXT
   headcommand                = \...##1
   inainte                    = BEFEHL
   dupa                       = BEFEHL
   intre                      = BEFEHL
   alternativ                  = stanga dreapta inmargine instanga indreapta margine marginestanga marginedreapta innermargin
                                outermargin serried suspendat sus comanda note NAME
   aliniere                   = inherits: \seteazaalinierea
   headalign                   = inherits: \seteazaalinierea
   aliniat                     = inherits: \seteazaaliniat
   display                    = da nu
   aliniaturmator             = da nu auto
   latime                     = ajustat broad linie DIMENSION
   distanta                    = niciunul DIMENSION
   dilatat                     = NUMMER
   shrink                      = NUMMER
   suspenda                    = ajustat broad niciunul margine NUMMER
   closesymbol                 = BEFEHL
   closecommand                = \...##1
   expansiune                  = da nu xml
   referenceprefix             = + - TEXT
   exemplu                     = TEXT
   margine                     = da nu standard DIMENSION
   stil                        = STYLE BEFEHL
   culoare                     = COLOR
   stiltitlu                   = STYLE BEFEHL
   culoaretitlu                = COLOR
   alinieretitlu              = da nu
   inherits: \setupcounter

```

\setupnotations [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```

1  NAME                      OPT
2  inherits: \setupnotation

```

**\setupnote** [ $\dots$ , $\dots$ ]<sup>1</sup> [ $\dots$ , $\dots$ ]<sup>2</sup> $\dots$ , $\dots$ ]

1 NAME OPT  
2 interactiune = da nu numar text tot  
symbolcommand = \...##1  
comandatext = \...##1  
indicator = da nu  
separatorstext = BEFEHL  
latime = DIMENSION  
inaltime = DIMENSION  
distanta = DIMENSION  
rulecommand = BEFEHL  
rigla = on dezactivat normal stanga dreapta comanda paragraf  
split = tolerant strict foartestricte NUMBER  
factor = NUMBER  
locatie = text pagina inalt subsol niciunul coloane firstcolumn lastcolumn  
urmatorul = BEFEHL  
n = NUMBER  
culoarerigla = COLOR  
grosimerigla = DIMENSION  
setups = NAME  
spatiereinterliniara = NAME  
paragraf = da nu  
inainte = BEFEHL  
dupa = BEFEHL  
intre = BEFEHL  
scop = pagina  
distantacoloane = DIMENSION  
continua = da nu  
alternativ = grila fixat coloane note niciunul  
criteriu = pagina  
fonttext = inherits: \seteazafonttext  
aliniera = inherits: \seteazaaliniera  
stiltext = STYLE BEFEHL  
culoaretex = COLOR  
anchor = urmatorul  
spatiuinainte = inherits: \blanc  
spaceinbetween = inherits: \blanc  
inherits: \seteazainconjurat

**\setupnotes** [ $\dots$ , $\dots$ ]<sup>1</sup> [ $\dots$ , $\dots$ ]<sup>2</sup> $\dots$ , $\dots$ ]

1 NAME OPT  
2 inherits: \setupnote

**\setupoffset** [ $\dots$ , $\dots$ ]<sup>\*</sup> $\dots$ , $\dots$ ]

\* inherits: \setupoffsetbox

**\setupoffsetbox** [ $\dots$ , $\dots$ ]<sup>\*</sup> $\dots$ , $\dots$ ]

\* x = DIMENSION  
y = DIMENSION  
offsetstanga = DIMENSION  
offsetdreapta = DIMENSION  
offsetsus = DIMENSION  
offsetjos = DIMENSION  
metoda = fixat  
latime = DIMENSION  
inaltime = DIMENSION  
inaltime = DIMENSION  
locatie = stanga centru dreapta sus subsol linie l c r m t b g

**\setupoutputroutine** [ $\dots$ ]<sup>1</sup> [ $\dots$ , $\dots$ ]<sup>2</sup> $\dots$ , $\dots$ ]

1 NAME OPT  
2 KEY = CSNAME

**\setupoutputroutine** [ $\dots$ ]<sup>\*</sup>

\* NAME

**\setuppagechecker** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 linii = NUMMER  
offset = DIMENSION  
metoda = 0 1 2 3  
inainte = BEFEHL  
dupa = BEFEHL  
intre = BEFEHL

**\setuppagecolumns** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 separator = NAME  
directie = normal reverse  
distanta = DIMENSION  
n = NUMMER  
latimemaxima = DIMENSION  
alinieri = inherits: \setezaalinierea  
blanc = inherits: \blanc  
culoare = COLOR  
setups = NAME  
pagina = inherits: \pagina  
inherits: \seteazainconjurat

**\setuppageinjection** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 stare = precedent urmatorul NUMMER  
intarziere = da nu  
alternativ = figura buffer setups niciunul NAME  
pagina = inherits: \pagina  
pagestate = start stop  
n = NUMMER  
inherits: \seteazainconjurat

**\setuppageinjectionalternative** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 renderingsetup = NAME

**\setuppageshift** [...<sup>1</sup>] [...<sup>2</sup>] [...<sup>3</sup>]

1 pagina foaie OPT OPT  
2 NAME  
3 NAME

**\setuppagestate** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 intarziere = da nu

**\setuppairedbox** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 inainte = BEFEHL  
dupa = BEFEHL  
intre = BEFEHL  
locatie = stanga centru dreapta sus subsol inalt jos  
n = NUMMER  
distanta = DIMENSION  
fonttext = inherits: \seteazafonttext  
latime = DIMENSION  
inaltime = DIMENSION  
latimemaxima = DIMENSION  
inaltimemaxima = DIMENSION  
alinieri = inherits: \setezaalinierea  
stil = STYLE BEFEHL  
culoare = COLOR

**\setarePAIREDBOX** [...<sup>\*</sup>,...]

\* inherits: \setuppairedbox  
instances: legend

**\setarelegend** [...<sup>\*</sup>,...]

\* inherits: \setuppairedbox

```
\setuppaper [...,..*...,...]
* inherits: \seteazadimensiunihartie
```

```
\setupparagraph [...,1...] [...,..2...,...]
1 NAME OPT
2 stil = STYLE BEFEHL
culoare = COLOR
alinieri = inherits: \seteazaalinieria
setups = NAME
```

```
\setupparagraphintro [...,1...] [...,2]
1 reset fiecare primul urmatorul
2 BEFEHL
```

```
\setupparallel [...,1] [...,2,...] [...,..3...,...]
1 NAME
2 NAME
3 setups = NAME
start = NUMMER
n = NUMMER
criteriu = tot
```

```
\setupperiodkerning [...,1,...] [...,..2...,...]
1 NAME OPT
2 factor = NUMMER
```

```
\setupperiods [...,..*...,...]
* n = NUMMER
latime = DIMENSION ajustat
distanta = DIMENSION
simbol = BEFEHL
```

```
\setupplacement [...,1,...] [...,..2...,...]
1 NAME OPT
2 inainte = BEFEHL
dupa = BEFEHL
stanga = BEFEHL
dreapta = BEFEHL
grid = inherits: \snaftogrid
corectielinie = on dezactivat
corectieadancime = on dezactivat
margine = da nu standard
```

```
\setuppositionbar [...,..*...,...]
* stil = STYLE BEFEHL
culoare = COLOR
n = NUMMER
min = NUMMER
max = NUMMER
text = TEXT
latime = DIMENSION
inaltime = DIMENSION
inaltime = DIMENSION
```

```
\setupprocessor [...,1,...] [...,..2...,...]
1 NAME OPT
2 stare = start stop
stanga = BEFEHL
dreapta = BEFEHL
comanda = \...##1
stil = STYLE BEFEHL
culoare = COLOR
```

\setupprofile [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

1 NAME OPT  
2 inalttime = DIMENSION  
inalttime = DIMENSION  
distanta = DIMENSION  
factor = NUMMER  
linii = NUMMER  
metoda = strict fixat niciunul

\setupquotation [...,<sup>\*</sup>...,...]

\* inherits: \setupdelimitedtext

\setuprealpagenumber [...,<sup>\*</sup>...,...]

\* inherits: \setupcounter

\setupreferenceformat [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

1 NAME OPT  
2 eticheta = \* NAME  
stanga = BEFEHL  
dreapta = BEFEHL  
type = implicit text titlu numar pagina realpage  
setups = NAME  
autocase = da nu  
text = TEXT  
stil = STYLE BEFEHL  
culoare = COLOR

\setupreferenceprefix [...]

\* + - TEXT

\setupreferencestructureprefix [...<sup>1</sup>] [...<sup>2</sup>] [...,<sup>3</sup>...,...]

1 NAME ABSCHNITT OPT OPT  
2 implicit  
3 prefix = da nu  
prefixseparatorset = NAME  
prefixconversion = NAME  
prefixconversionset = NAME  
prefixstarter = BEFEHL PROCESSOR->BEFEHL  
prefixstopper = BEFEHL PROCESSOR->BEFEHL  
prefixset = NAME  
prefixsegments = NUMMER NUMMER:NUMMER NUMMER:\* NUMMER:tot ABSCHNITT ABSCHNITT:ABSCHNITT ABSCHNITT:\* ABSCHNITT:tot  
curent  
numberconversion = NAME  
numberconversionset = NAME  
numberstarter = BEFEHL PROCESSOR->BEFEHL  
numberstopper = BEFEHL PROCESSOR->BEFEHL  
numbersegments = NUMMER NUMMER:NUMMER NUMMER:\* NUMMER:tot  
numberseparatorset = NAME  
prefixconnector = BEFEHL PROCESSOR->BEFEHL

\setupregisters [...<sup>1</sup>] [...,<sup>2</sup>...,...]

1 NAME NAME:NUMMER OPT  
2 inherits: \seteazaregistru

\setupregisters [...<sup>1</sup>...] [...<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NUMMER  
3 inherits: \seteazaregistru

\setuprenderingwindow [...<sup>1</sup>...] [...,<sup>2</sup>...,...]

1 NAME OPT  
2 actiunedeschiderepagina = REFERENCE  
actiuneinchiderepagina = REFERENCE  
inherits: \seteazainconjurat



```

\setuppruby [...1,...] [...2,...]
1  NAME          OPT
2  locatie       = sus stanga dreapta niciunul
   aliniere      = auto flushleft centru flushright
   dilatata      = da nu
   hoffset       = DIMENSION
   voffset       = DIMENSION
   distanta      = niciunul DIMENSION
   stanga        = BEFEHL
   dreapta       = BEFEHL
   stil          = STYLE BEFEHL
   culoare       = COLOR

```

```

\setups [...*,...]
*  NAME

```

```

\setupscale [...1,...] [...2,...]
1  NAME          OPT
2  scala          = NUMMER
   xscala         = NUMMER
   yscala         = NUMMER
   latime         = DIMENSION
   inaltime       = DIMENSION
   inaltime       = da nu
   linii          = NUMMER
   factor         = ajustat broad max min auto implicit
   hfactor        = ajustat broad max min auto implicit
   factorw        = ajustat broad max min auto implicit
   latimemaxima   = DIMENSION
   inaltimemaxima = DIMENSION
   s              = NUMMER
   sx             = NUMMER
   sy             = NUMMER
   equalwidth     = DIMENSION
   equalheight    = DIMENSION
   grid           = da ajustat inaltime adancime jumatatelinie

```

```

\setupscript [...1,...] [...2,...]
1  NAME          OPT
2  metoda        = hangul hanzi nihongo ethiopic thai test
   preset        = NAME
   features      = auto

```

```

\setupscripts [...1,...] [...2,...]
1  NAME          OPT
2  inherits: \setupscript

```

```

\setupselector [...1,...] [...2,...]
1  NAME
2  n = NUMMER
   m = NUMMER

```

```

\setupshift [...1,...] [...2,...]
1  NAME          OPT
2  continua      = da nu
   unitate       = ex em pt in cm mm sp bp pc dd cc nc
   metoda        = NUMMER
   dy            = NUMMER
   aliniere      = inherits: \seteazaalinierea
   stil          = STYLE BEFEHL
   culoare       = COLOR

```

```

\setupsidebar [...1,...] [...2,...]
1  NAME          OPT
2  grosimerigla   = DIMENSION
   culoarerigla   = COLOR
   alternativ      = NUMMER
   offsetsus      = DIMENSION
   offsetjos      = DIMENSION
   distanta       = DIMENSION
   distantamarginestanga = DIMENSION
   nivel          = NUMMER

```

`\setupspellchecking [...,*...]`

\* stare = start stop  
metoda = 1 2 3  
lista = NAME

`\setupstartstop [...,1...] [...,2...]`

1 NAME OPT  
2 inainte = BEFEHL  
dupa = BEFEHL  
intre = BEFEHL  
setups = NAME  
stanga = BEFEHL  
dreapta = BEFEHL  
stil = STYLE BEFEHL  
culoare = COLOR

`\setupstretched [...,*...]`

\* inherits: \setupcharacterkerning

`\setupstruts [*.]`

\* da nu auto cap OPTajustat linie implicit CHARACTER

`\setupstyle [...,1...] [...,2...]`

1 NAME OPT  
2 metoda = comanda  
stil = STYLE BEFEHL  
culoare = COLOR

`\setupsubformula [...,1...] [...,2...]`

1 NAME OPT  
2 aliniaturmator = da nu auto

`\setupsubformulas [...,1...] [...,2...]`

1 NAME OPT  
2 inherits: \setupsubformula

`\setupsynctex [...,*...]`

\* stare = start stop  
metoda = min max

`\setups {...,*...}`

\* NAME

```

\setupTABLE [...1,...] [...2,...] [...3,...]
1  r c x y rand colona primul uOPTltim start antet fiecare impar par unu NUMMER -NUMMER
2  primul least fiecare doi impar par NUMMER -NUMMER
3  extras          = BEFEHL
   stanga          = BEFEHL
   dreapta         = BEFEHL
   culoaretitlu    = COLOR
   stiltitlu       = STYLE BEFEHL
   distantamarginestanga = DIMENSION
   distantamarginedreapta = DIMENSION
   distantacoloane = DIMENSION
   latimemaxima    = DIMENSION
   setups          = NAME
   latimetext       = DIMENSION local
   split           = da nu repetat auto
   antet           = repetat
   optiune         = dilatat tight
   inainte         = BEFEHL
   dupa            = BEFEHL
   aceeasipagina   = inainte dupa ambele
   spaceinbetween  = inherits: \blanc
   splitoffset     = DIMENSION
   aliniazacaracter = da nu
   alierecaracter  = TEXT number->TEXT text->TEXT
   distanta        = DIMENSION
   culoare         = COLOR
   stil            = math STYLE BEFEHL
   inherits: \seteazainconjurat

```

```

\setupTEXpage [...*,...]
* inherits: \setupfittingpage

```

```

\setuptabulation [...1,...] [...2,...]
1  NAME          OPT
2  format        = TEMPLATE niciunul
   inainte       = BEFEHL
   dupa          = BEFEHL
   distanta      = mic mediu mare niciunul blank adancime grila DIMENSION
   blanc        = preferinta aceeasipagina max fortat enable dezactivat faraalb impachetat inapot overlay
                  totdeauna weak strong implicit inainte intre dupa fixat flexibil niciunul mic mediu mare
                  linie jumatatelinie quarterline formula alb inaltime adancime standard NUMMER*mic NUMMER*mediu
                  NUMMER*mare NUMMER*linie NUMMER*jumatatelinie NUMMER*quarterline NUMMER*formula NUMMER*alb
                  NUMMER*inaltime NUMMER*adancime category:NUMMER order:NUMMER penalty:NUMMER DIMENSION NAME
   stiltitlu     = STYLE BEFEHL
   culoaretitlu  = COLOR
   fundal        = NAME
   culoarefundal = COLOR
   foregroundstyle = STYLE BEFEHL
   foregroundcolor = COLOR
   aliniere      = stanga centru dreapta dimension
   rigla         = linie normal
   culoarerigla  = COLOR
   grosimerigla  = DIMENSION
   fonttext      = inherits: \seteazafonttext
   aliniat       = da nu
   split         = da nu repetat auto
   unitate       = DIMENSION
   margine       = DIMENSION
   intern        = BEFEHL
   EQ            = BEFEHL
   antet         = da repetat text
   frame         = on dezactivat
   titlu         = TEXT
   keptogether   = da nu

```

```

\setuptagging [...*,...]
* stare = start stop
  metoda = auto

```

**\setuptextbackground** [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

```
1 NAME OPT
2 stare = start stop
  locatie = text paragraf totdeauna niciunul
  criteriu = NUMMER
  alternativ = NUMMER
  mp = NAME
  metoda = NAME
  fundal = culoare
  culoarefundal = COLOR
  colt = rectangular rotund
  nivel = NUMMER
  offsetfundal = DIMENSION
  inainte = BEFEHL
  dupa = BEFEHL
  aliniere = inherits: \seteazaalinierea
  dash = NUMMER
  raza = DIMENSION
  frame = on dezactivat
  culoareframe = COLOR
  grosimerigla = DIMENSION
  voffset = DIMENSION
  offsetframe = DIMENSION
  offsetstanga = da nu standard DIMENSION
  offsetdreapta = da nu standard DIMENSION
  offsetsus = mic mediu mare linie DIMENSION
  offsetjos = mic mediu mare linie DIMENSION
  stil = STYLE BEFEHL
  culoare = COLOR
```

**\setuptextflow** [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

```
1 NAME OPT
2 latime = DIMENSION
  stil = STYLE BEFEHL
  culoare = COLOR
```

**\setuptooltip** [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

```
1 NAME OPT
2 locatie = stanga centru dreapta
  inherits: \seteazainconjurat
```

**\setupunit** [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

```
1 NAME OPT
2 metoda = 1 2 3 4 5 6
  language = SPRACHE
  alternativ = text matematica
  order = reverse normal
  separator = mic mediu mare normal niciunul NAME
  spatiu = mic mediu mare normal niciunul NAME
  stil = STYLE BEFEHL
  culoare = COLOR
```

**\setupuserdata** [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

```
1 NAME OPT
2 inainte = BEFEHL
  dupa = BEFEHL
  aliniere = inherits: \seteazaalinierea
  setups = NAME
  stil = STYLE BEFEHL
  culoare = COLOR
  alternativ = implicit NAME
  KEY = VALUE
```

**\setupuserdataalternative** [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

```
1 NAME OPT
2 renderingsetup = NAME
  KEY = VALUE
```

**\setupuserpagenumber** [...,<sup>\*</sup>...,...]

```
* viewerprefix = TEXT
  stare = start stop niciunul mentine gol
  inherits: \setupcounter
```

```
\setupversion [...]  
*   concept fisier temporar final NAME
```

```
\setupviewerlayer [...,*=...,...]  
*   titlu       = TEXT  
    stare       = start stop  
    export      = da nu  
    tiparibil   = da nu  
    scop        = local global  
    metoda     = niciunul comanda
```

```
\setupvspacing [...,*=...,...]  
*   inherits: \vspacing OPT
```

```
\setupwithargument {...} {...}  
1   NAME  
2   CONTENT
```

```
\setupwithargumentswapped {...} {...}  
1   CONTENT  
2   NAME
```

```
\setupxml [...,*=...,...]  
*   implicit    = ascuns niciunul text  
    compress    = da nu
```

```
\setupxtable [...,1,...] [...,2=...,...]  
1   NAME OPT  
2   latimetext = DIMENSION local  
    fonttext   = inherits: \seteazafonttext  
    spaceinbetween = inherits: \blanc  
    optiune     = tight max dilatat latime inaltime fixat  
    inaltimetext = DIMENSION  
    latimemaxima = DIMENSION  
    distantacoloane = DIMENSION  
    distantamarginestanga = DIMENSION  
    distantamarginedreapta = DIMENSION  
    antet       = repetat  
    subsol      = repetat  
    grosimerigla = DIMENSION  
    split       = da nu repetat auto  
    splitoffset = DIMENSION  
    aceeasipagina = inainte dupa ambele  
    distanta    = DIMENSION  
    aliniazacaracter = da nu  
    alignmentleftsample = TEXT  
    alignmentrightsample = TEXT  
    alignmentleftwidth = DIMENSION  
    alignmentrightwidth = DIMENSION  
    alierecaracter = TEXT  
    inherits: \seteazainconjurat
```

```
\setuvalue {...} {...}  
1   NAME  
2   CONTENT
```

```
\setuxvalue {...} {...}  
1   NAME  
2   CONTENT
```

```
\setvalue {...} {...}  
1   NAME  
2   CONTENT
```

```
\setvariable {...} {...} {...}  
1   NAME  
2   KEY  
3   VALUE
```

<pre> \setvariables [.<sup>1</sup>.] [...,<sup>2</sup>...,...] 1  NAME 2  set    = BEFEHL    reset  = BEFEHL    KEY    = VALUE </pre>
<pre> \setvboxregister .<sup>1</sup>. {..<sup>2</sup>.} 1  CSNAME NUMMER 2  CONTENT </pre>
<pre> \setvisualizerfont [.*.] *  FONT                OPT </pre>
<pre> \setvtopregister .<sup>1</sup>. {..<sup>2</sup>.} 1  CSNAME NUMMER 2  CONTENT </pre>
<pre> \setwidthof .<sup>1</sup>. \to \..<sup>2</sup>. 1  TEXT 2  CSNAME </pre>
<pre> \setxmeasure {..<sup>1</sup>.} {..<sup>2</sup>.} 1  NAME 2  DIMENSION </pre>
<pre> \setxvalue {..<sup>1</sup>.} {..<sup>2</sup>.} 1  NAME 2  CONTENT </pre>
<pre> \setxvariable {..<sup>1</sup>.} {..<sup>2</sup>.} {..<sup>3</sup>.} 1  NAME 2  KEY 3  VALUE </pre>
<pre> \setxvariables [.<sup>1</sup>.] [...,<sup>2</sup>...,...] 1  NAME 2  set    = BEFEHL    reset  = BEFEHL    KEY    = VALUE </pre>
<pre> \shapedhbox {.*.} *  CONTENT </pre>
<pre> \shiftbox {..<sup>1</sup>.} 1  CONTENT </pre>
<pre> \SHIFT {.*.} *  CONTENT instances: shiftup shiftdown </pre>
<pre> \shiftdown {.*.} *  CONTENT </pre>
<pre> \shiftup {.*.} *  CONTENT </pre>
<pre> \showallmakeup </pre>
<pre> \showattributes </pre>

\showboxes
\showbtxdatasetauthors [...,.. <sup>*</sup> ...,...] *    specification = NAME                    OPT dataset        = NAME field          = address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME
\showbtxdatasetauthors [...*] *    NAME                                    OPT
\showbtxdatasetcompleteness [...,.. <sup>*</sup> ...,...] *    specification = NAME                    OPT dataset        = NAME field          = address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME
\showbtxdatasetcompleteness [...*] *    NAME                                    OPT
\showbtxdatasetfields [...,.. <sup>*</sup> ...,...] *    specification = NAME                    OPT dataset        = NAME field          = address assignee autor booktitle capitol zi dayfiled edition editor howpublished institution journal language luna monthfiled nationality note numar unu doi organization pages publisher school series titlu type volume an yearfiled NAME
\showbtxdatasetfields [...*] *    NAME                                    OPT
\showbtxfields [...,.. <sup>*</sup> ...,...] *    rotatie        = NUMMER <sup>OPT</sup> specification = NAME
\showbtxfields [...*] *    NAME                                    OPT
\showbtxhashedauthors [...*] *    TEXT                                    OPT
\showbtxtables [...*] *    TEXT                                    OPT
\showchardata {...} *    TEXT
\showcharratio {...} *    TEXT
\showcolorbar [...*] *    COLOR
\showcolorcomponents [...*] *    COLOR
\showcolorset [...*] *    COLOR

<code>\showcolorstruts</code>
<code>\showcounter [...]</code> <code>* NAME</code>
<code>\showdirectives</code>
<code>\showdirlsinmargin</code>
<code>\showedebuginfo</code>
<code>\showexperiments</code>
<code>\showfont [...]</code> <code>[...<sup>2</sup>,...]</code> <code>1 FONT</code> <code>OPT</code> <code>2 NUMMER</code>
<code>\showfontdata</code>
<code>\showfontexpansion</code>
<code>\showfontitalics</code>
<code>\showfontkerns</code>
<code>\showfontparameters</code>
<code>\showfontstrip [...*,...]</code> <code>* inherits: \seteazafonttext</code>
<code>\showfontstyle [...<sup>1</sup>,...]</code> <code>[...<sup>2</sup>,...]</code> <code>[...<sup>3</sup>,...]</code> <code>[...<sup>4</sup>,...]</code> <code>1 inherits: \seteazafont<sup>OPT</sup>text</code> <code>OPT</code> <code>OPT</code> <code>OPT</code> <code>2 rm ss tt mm hw cg</code> <code>3 tf bf it sl bi bs</code> <code>4 tot NUMMER</code>
<code>\showglyphdata</code>
<code>\showglyphs</code>
<code>\showgridsnapping</code>
<code>\showhelp {...}</code> <code>[...<sup>2</sup>]</code> <code>1 TEXT</code> <code>2 REFERENCE</code>
<code>\showhyphenationtrace [...<sup>1</sup>]</code> <code>[...<sup>2</sup>]</code> <code>1 SPRACHE</code> <code>OPT</code> <code>2 TEXT</code>
<code>\showhyphens {...}</code> <code>* TEXT</code>
<code>\showinjector [...*,...]</code> <code>* NAME</code> <code>OPT</code>



<code>\showjustification</code>
<code>\showkerning {...}</code> *    TEXT
<code>\showlayoutcomponents</code>
<code>\showligature {...}</code> *    TEXT
<code>\showligatures [...]</code> *    FONT
<code>\showlogcategories</code>
<code>\showmargins</code>
<code>\showmessage {...} {...} {...,<sup>3</sup>...}</code> 1    NAME 2    NAME NUMBER 3    TEXT
<code>\showminimalbaseline</code>
<code>\shownextbox \<sup>1</sup>... {<sup>2</sup>...}</code> 1    CSNAME 2    CONTENT
<code>\showotfcomposition {...} {...} {<sup>3</sup>...}</code> 1    FONT 2    -1 1 +1 12r r2l 3    TEXT
<code>\showparentchain \<sup>1</sup>... {<sup>2</sup>...}</code> 1    CSNAME 2    NAME
<code>\showsetupsdefinition [...]</code> *    NAME
<code>\showtimer {...}</code> *    TEXT
<code>\showtokens [...]</code> *    NAME
<code>\showtrackers</code>
<code>\showvalue {...}</code> *    NAME
<code>\showvariable {<sup>1</sup>...} {<sup>2</sup>...}</code> 1    NAME 2    KEY

<code>\showwarning {...} {...} {...,<sup>3</sup>...}</code> 1 NAME 2 NAME NUMMER 3 TEXT
<code>\signalrightpage</code>
<code>\simbol [...]<sup>1</sup> [...]<sup>2</sup></code> 1 NAME <small>OPT</small> 2 NAME
<code>\simbol {...}</code> * NAME
<code>\simplealignedbox {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup></code> 1 DIMENSION 2 stanga dreapta centru flushleft flushright intern extern 3 CONTENT
<code>\simplealignedboxplus {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup></code> 1 DIMENSION 2 stanga dreapta centru flushleft flushright intern extern 3 TEXT 4 CONTENT
<code>\simplealignedspreadbox {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup></code> 1 DIMENSION 2 stanga dreapta centru flushleft flushright intern extern 3 CONTENT
<code>\simplegroupedcommand {...}<sup>1</sup> {...}<sup>2</sup></code> 1 BEFEHL 2 BEFEHL
<code>\simplereversealignedbox {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup></code> 1 DIMENSION 2 stanga dreapta centru flushleft flushright intern extern 3 CONTENT
<code>\simplereversealignedboxplus {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup></code> 1 DIMENSION 2 stanga dreapta centru flushleft flushright intern extern 3 TEXT 4 CONTENT
<code>\singalcharacteralign {...}<sup>1</sup> {...}<sup>2</sup></code> 1 NUMMER 2 NUMMER
<code>\singlebond</code>
<code>\sixthofsixarguments {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup> {...}<sup>5</sup> {...}<sup>6</sup></code> 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT
<code>\slantedface</code>

$\backslash$ slicepages [ <sup>1</sup> ...] [ <sup>2</sup> ... <sub>OPT</sub> ...] [ <sup>3</sup> ... <sub>OPT</sub> ...] 1 FILE 2 offset = DIMENSION hoffset = DIMENSION voffset = DIMENSION latime = DIMENSION inaltime = DIMENSION n = NUMBER 3 offset = DIMENSION hoffset = DIMENSION voffset = DIMENSION latime = DIMENSION inaltime = DIMENSION n = NUMBER
$\backslash$ slovenianNumerals {...} * NUMBER
$\backslash$ sloveniannumerals {...} * NUMBER
$\backslash$ smallbodyfont
$\backslash$ smallcappedcharacters {...} * NUMBER
$\backslash$ smallcappedromannumerals {...} * NUMBER
$\backslash$ smaller
$\backslash$ smallskip
$\backslash$ smash [ <sup>1</sup> ] {... <sup>2</sup> } 1 w h d t <sub>OPT</sub> 2 CONTENT
$\backslash$ smashbox ... * CSNAME NUMBER
$\backslash$ smashboxed ... * CSNAME NUMBER
$\backslash$ smashedhbox <sup>1</sup> ... {... <sup>2</sup> } 1 TEXT <sub>OPT</sub> 2 CONTENT
$\backslash$ smashedvbox <sup>1</sup> ... {... <sup>2</sup> } 1 TEXT <sub>OPT</sub> 2 CONTENT
$\backslash$ snaptogrid [ <sup>1</sup> ] \ <sup>2</sup> ... {... <sup>3</sup> } 1 normal standard <sub>OPT</sub> da strict tolerant sus subsol ambele broad ajustat primul ultim inalt unu jos niciunul linie strut box min max centru math math:linie math:jumatatelinie math:-line math:-halfline NAME 2 CSNAME 3 CONTENT
$\backslash$ snaptogrid [... <sup>1</sup> ...] \ <sup>2</sup> ... {... <sup>3</sup> } 1 inherits: \define <sub>OPT</sub> gridsnapping 2 CSNAME 3 CONTENT

\someheadnumber [...] [...] 1    ABSCHNITT 2    precedent curent urmatorul primul ultim
\somekindoftab [..., ... <sup>*</sup> ..., ...] *    alternativ    =    orizontal <sup>OPT</sup> vertical latime       =    DIMENSION inaltime    =    DIMENSION n            =    NUMMER m            =    NUMMER
\somelocalfloat
\somenamedheadnumber {...} {...} 1    ABSCHNITT 2    precedent curent urmatorul primul ultim
\someplace {...} {...} {...} {...} {...} [...] 1    TEXT 2    TEXT 3    TEXT 4    TEXT 5    TEXT 6    REFERENCE
\SORTING [... <sup>1</sup> ] {... <sup>2</sup> } 1    NAME <sup>OPT</sup> 2    CONTENT instances: logo
\logo [... <sup>1</sup> ] {... <sup>2</sup> } 1    NAME <sup>OPT</sup> 2    CONTENT
\spaceddigits {...} *    NUMMER
\spaceddigitismethod
\spaceddigitsseparator
\spaceddigitssymbol
\spanishNumerals {...} *    NUMMER
\spanishnumerals {...} *    NUMMER
\spatiifixate
\spatiu
\spatiufixat
\splitatasterisk ... \ <sup>2</sup> ... \ <sup>3</sup> ... 1    TEXT 2    CSNAME 3    CSNAME

$\backslash\text{splitatcolon } \dots \text{ }^1 \backslash \dots \text{ }^2 \backslash \dots \text{ }^3$ 1 TEXT 2 CSNAME 3 CSNAME
$\backslash\text{splitatcolons } \dots \text{ }^1 \backslash \dots \text{ }^2 \backslash \dots \text{ }^3$ 1 TEXT 2 CSNAME 3 CSNAME
$\backslash\text{splitatcomma } \dots \text{ }^1 \backslash \dots \text{ }^2 \backslash \dots \text{ }^3$ 1 TEXT 2 CSNAME 3 CSNAME
$\backslash\text{splitatperiod } \dots \text{ }^1 \backslash \dots \text{ }^2 \backslash \dots \text{ }^3$ 1 TEXT 2 CSNAME 3 CSNAME
$\backslash\text{splitdfrac } \{ \dots \}^1 \{ \dots \}^2$ 1 CONTENT 2 CONTENT
$\backslash\text{splitfilename } \{ \dots \}^*$ * FILE
$\backslash\text{splitfrac } \{ \dots \}^1 \{ \dots \}^2$ 1 CONTENT 2 CONTENT
$\backslash\text{splitoffbase}$
$\backslash\text{splitofffull}$
$\backslash\text{splitoffkind}$
$\backslash\text{splitoffname}$
$\backslash\text{splitoffpath}$
$\backslash\text{splitoffroot}$
$\backslash\text{splitofftokens } \dots \text{ }^1 \backslash \text{from } \dots \text{ }^2 \backslash \text{to } \dots \text{ }^3$ 1 TEXT 2 TEXT 3 CSNAME
$\backslash\text{splitofftype}$
$\backslash\text{splitstring } \dots \text{ }^1 \backslash \text{at } \dots \text{ }^2 \backslash \text{to } \dots \text{ }^3 \backslash \text{and } \dots \text{ }^4$ 1 TEXT 2 TEXT 3 CSNAME 4 CSNAME
$\backslash\text{spreadhbox } \dots$ * CSNAME NUMBER

$\backslash\text{sqrt}$ [ <sup>1</sup> ...] { <sup>2</sup> ...} 1 TEXT OPT 2 CONTENT
$\backslash\text{stackrel}$ { <sup>1</sup> ...} { <sup>2</sup> ...} 1 CONTENT 2 CONTENT
$\backslash\text{stanga}$ ... * CHARACTER
$\backslash\text{start}$ [ <sup>*</sup> ...] ... $\backslash\text{stop}$ * NAME OPT
$\backslash\text{startalignment}$ [... <sup>*</sup> ...] ... $\backslash\text{stopalignment}$ * inherits: \seteazaalinierea
$\backslash\text{startaliniatcentru}$ ... $\backslash\text{stopaliniatcentru}$
$\backslash\text{startaliniatdreapta}$ ... $\backslash\text{stopaliniatdreapta}$
$\backslash\text{startaliniatstanga}$ ... $\backslash\text{stopaliniatstanga}$
$\backslash\text{startallmodes}$ [... <sup>*</sup> ...] ... $\backslash\text{stopallmodes}$ * NAME
$\backslash\text{startantettabel}$ [ <sup>*</sup> ...] ... $\backslash\text{stopantettabel}$ * NAME
$\backslash\text{startATTACHMENT}$ [ <sup>1</sup> ...] [... <sup>2</sup> ... <sup>2</sup> ...] ... $\backslash\text{stopATTACHMENT}$ 1 NAME OPT OPT 2 inherits: \setupattachment instances: attachment
$\backslash\text{startattachment}$ [ <sup>1</sup> ...] [... <sup>2</sup> ... <sup>2</sup> ...] ... $\backslash\text{stopattachment}$ 1 NAME OPT OPT 2 inherits: \setupattachment
$\backslash\text{startbar}$ [ <sup>*</sup> ...] ... $\backslash\text{stopbar}$ * NAME
$\backslash\text{startbbordermatrix}$ ... $\backslash\text{stopbbordermatrix}$
$\backslash\text{startbitmapimage}$ [... <sup>*</sup> ...] ... $\backslash\text{stopbitmapimage}$ * culoare = rgb cmyk gri latime = DIMENSION inaltime = DIMENSION x = NUMMER y = NUMMER
$\backslash\text{startblocsectioneambient}$ [ <sup>*</sup> ...] ... $\backslash\text{stopblocsectioneambient}$ * NAME
$\backslash\text{startbordermatrix}$ ... $\backslash\text{stopbordermatrix}$
$\backslash\text{startbtxrenderingdefinitions}$ [ <sup>*</sup> ...] ... $\backslash\text{stopbtxrenderingdefinitions}$ * NAME

<code>\startbuffer [...] ... \stopbuffer</code> *    NAME                    OPT
<code>\startBUFFER ... \stopBUFFER</code> instances: hiding
<code>\starthiding ... \stophiding</code>
<code>\startcatcodetable \* ... \stopcatcodetable</code> *    CSNAME
<code>\startcenteraligned ... \stopcenteraligned</code>
<code>\startcharacteralign [...,.*=...,...] ... \stopcharacteralign</code> *    inherits: \setupcharacteralign
<code>\startcharacteralign [...] ... \stopcharacteralign</code> *    TEXT number->TEXT text->TEXT
<code>\startcheckedfences ... \stopcheckedfences</code>
<code>\startchemical [<sup>1</sup>] [...,.*<sup>2</sup>=...,...] ... \stopchemical</code> 1    NAME                    OPT                    OPT 2    inherits: \setupchemical
<code>\startcollect ... \stopcollect</code>
<code>\startcollecting ... \stopcollecting</code>
<code>\startcoloane [...,.*=...,...] ... \stopcoloane</code> *    inherits: \seteazacol <sup>OPT</sup> ane
<code>\startcolorintent [...] ... \stopcolorintent</code> *    knockout overprint niciunul
<code>\startcoloronly [...] ... \stopcoloronly</code> *    COLOR
<code>\startcolorset [...] ... \stopcolorset</code> *    NAME
<code>\startcolumnset [<sup>1</sup>] [...,.*<sup>2</sup>=...,...] ... \stopcolumnset</code> 1    NAME                    OPT                    OPT 2    inherits: \setupcolumnset
<code>\startcolumnsetspan [<sup>1</sup>] [...,.*<sup>2</sup>=...,...] ... \stopcolumnsetspan</code> 1    NAME                    OPT 2    inherits: \setupcolumnsetspan
<code>\startCOLUMNSET [...,.*=...,...] ... \stopCOLUMNSET</code> *    inherits: \setupcolumnset <sup>OPT</sup>
<code>\startcolumnspan [...,.*=...,...] ... \stopcolumnspan</code> *    inherits: \setupcolumnspan <sup>OPT</sup>

<pre> \startcombination [...]<sup>1</sup> [...]<sup>2</sup>... \stopcombination 1  NAME          OPT          OPT 2  inherits: \setupcombination </pre>
<pre> \startcombination [...]<sup>1</sup> [...]<sup>2</sup>... \stopcombination 1  NAME          OPT          OPT 2  N*M </pre>
<pre> \startcomentariupagina ... \stopcomentariupagina </pre>
<pre> \startCOMMENT [...]<sup>1</sup> [...]<sup>2</sup>... \stopCOMMENT 1  TEXT          OPT          OPT 2  inherits: \seteazacomentariu instances: comment </pre>
<pre> \startcomment [...]<sup>1</sup> [...]<sup>2</sup>... \stopcomment 1  TEXT          OPT          OPT 2  inherits: \seteazacomentariu </pre>
<pre> \startcomponenta [...]<sup>*</sup>... \stopcomponenta *  FILE * </pre>
<pre> \startcomponenta ...<sup>*</sup>... \stopcomponenta *  FILE * </pre>
<pre> \startcontextcode ... \stopcontextcode </pre>
<pre> \startcontextdefinitioncode ... \stopcontextdefinitioncode </pre>
<pre> \startctxfunction ...<sup>*</sup>... \stopctxfunction *  NAME </pre>
<pre> \startctxfunctiondefinition ...<sup>*</sup>... \stopctxfunctiondefinition *  NAME </pre>
<pre> \startculoare [...]<sup>*</sup>... \stopculoare *  COLOR </pre>
<pre> \startcurrentcolor ... \stopcurrentcolor </pre>
<pre> \startcurrentlistentrywrapper ... \stopcurrentlistentrywrapper </pre>
<pre> \startdelimited [...]<sup>1</sup> [...]<sup>2</sup> [...]<sup>3</sup>... \stopdelimited 1  NAME          OPT          OPT 2  SPRACHE 3  inherits: \startingust </pre>
<pre> \startdelimitedtext [...]<sup>1</sup> [...]<sup>2</sup> [...]<sup>3</sup>... \stopdelimitedtext 1  NAME          OPT          OPT 2  SPRACHE 3  inherits: \startingust </pre>
<pre> \startDELIMITEDTEXT [...]<sup>1</sup> [...]<sup>2</sup>... \stopDELIMITEDTEXT 1  SPRACHE          OPT          OPT 2  inherits: \startingust instances: quotation quote blockquote speech aside </pre>



$\backslash\text{startaside}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...,...] ... $\backslash\text{stopaside}$ 1 SPRACHE OPT OPT 2 inherits: $\backslash\text{startingust}$
$\backslash\text{startblockquote}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...,...] ... $\backslash\text{stopblockquote}$ 1 SPRACHE OPT OPT 2 inherits: $\backslash\text{startingust}$
$\backslash\text{startquotation}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...,...] ... $\backslash\text{stopquotation}$ 1 SPRACHE OPT OPT 2 inherits: $\backslash\text{startingust}$
$\backslash\text{startquote}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...,...] ... $\backslash\text{stopquote}$ 1 SPRACHE OPT OPT 2 inherits: $\backslash\text{startingust}$
$\backslash\text{startspeech}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...,...] ... $\backslash\text{stopspeech}$ 1 SPRACHE OPT OPT 2 inherits: $\backslash\text{startingust}$
$\backslash\text{startDESCRIERE}$ [..., ... <sup>*</sup> ..., ...] ... $\backslash\text{stopDESCRIERE}$ * titlu = TEXT OPT semncarte = TEXT lista = TEXT referinta = REFERENCE
$\backslash\text{startDESCRIERE}$ [..., <sup>1</sup> ...] { <sup>2</sup> ...} ... $\backslash\text{stopDESCRIERE}$ 1 REFERENCE OPT OPT 2 TEXT
$\backslash\text{startdespachetat}$ ... $\backslash\text{stopdespachetat}$
$\backslash\text{startdisplaymath}$ ... $\backslash\text{stopdisplaymath}$
$\backslash\text{startdmath}$ ... $\backslash\text{stopdmath}$
$\backslash\text{startdocument}$ [..., ... <sup>*</sup> ..., ...] ... $\backslash\text{stopdocument}$ * inherits: $\backslash\text{setupdocument}$ OPT
$\backslash\text{startdute}$ [...] ... $\backslash\text{stopdute}$ * REFERENCE
$\backslash\text{starteffect}$ [...] ... $\backslash\text{stopeffect}$ * NAME
$\backslash\text{startEFFECT}$ ... $\backslash\text{stopEFFECT}$
$\backslash\text{startelement}$ [..., <sup>*</sup> ...] ... $\backslash\text{stopelement}$ * REFERENCE OPT
$\backslash\text{startembeddedxtable}$ [..., ... <sup>*</sup> ..., ...] ... $\backslash\text{stopembeddedxtable}$ * inherits: $\backslash\text{setupxtable}$ OPT
$\backslash\text{startembeddedxtable}$ [... <sup>*</sup> ] ... $\backslash\text{stopembeddedxtable}$ * NAME OPT

<pre> \startENUMERARE [...,..<sup>*</sup>...,...] ... \stopENUMERARE *   titlu       = TEXT      OPT     semncarte   = TEXT     lista       = TEXT     referinta   = REFERENCE </pre>
<pre> \startENUMERARE [...,..<sup>1</sup>...] {...<sup>2</sup>} ... \stopENUMERARE 1   REFERENCE      OPT      OPT 2   TEXT </pre>
<pre> \startexceptions [...] ... \stopexceptions *   SPRACHE </pre>
<pre> \startexpanded ... \stopexpanded </pre>
<pre> \startexpandedcollect ... \stopexpandedcollect </pre>
<pre> \startextendedcatcodetable \*... ... \stopextendedcatcodetable *   CSNAME </pre>
<pre> \startexternalfigurecollection [...] ... \stopexternalfigurecollection *   NAME </pre>
<pre> \startfacingfloat [...] ... \stopfacingfloat *   NAME </pre>
<pre> \startfigura [...<sup>1</sup>] [...<sup>2</sup>] [...,..<sup>3</sup>...,...] ... \stopfigura 1   NAME      OPT 2   FILE 3   inherits: \figuraexterna </pre>
<pre> \startfittingpage [...<sup>1</sup>] [...,..<sup>2</sup>...,...] ... \stopfittingpage 1   NAME      OPT 2   inherits: \setupfittingpage </pre>
<pre> \startFITTINGPAGE [...,..<sup>*</sup>...,...] ... \stopFITTINGPAGE *   inherits: \setupfittingpage<sup>OPT</sup> instances: TEXpage MPpage </pre>
<pre> \startMPpage [...,..<sup>*</sup>...,...] ... \stopMPpage *   inherits: \setupfittingpage<sup>OPT</sup> </pre>
<pre> \startTEXpage [...,..<sup>*</sup>...,...] ... \stopTEXpage *   inherits: \setupfittingpage<sup>OPT</sup> </pre>
<pre> \startfixat [...<sup>*</sup>] ... \stopfixat *   jos centru inat<sup>OPT</sup> lohi implicit </pre>
<pre> \startfloatcombination [...,..<sup>*</sup>...,...] ... \stopfloatcombination *   inherits: \setupcombination      OPT </pre>
<pre> \startfloatcombination [...<sup>*</sup>] ... \stopfloatcombination *   N*M NAME      OPT </pre>

```

\startFLOATtext [...1,...] [...2,...] {...3} ... \stopFLOATtext
1 split totdeauna stangaOPTdreapta internOPTextern spatiuspate cutspace instanga indreapta inmargin marginestanga
marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inalttime
adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine
[-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva
effective antet subsol
2 REFERENCE
3 TEXT
instances: chemical figure table intermezzo graphic

```

```

\startchemicaltext [...1,...] [...2,...] {...3} ... \stopchemicaltext
1 split totdeauna stanga dreapta internOPTextern spatiuspate cutspace instanga indreapta inmargin marginestanga
marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inalttime
adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine
[-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva
effective antet subsol
2 REFERENCE
3 TEXT

```

```

\startfiguretext [...1,...] [...2,...] {...3} ... \stopfiguretext
1 split totdeauna stanga dreapta internOPTextern spatiuspate cutspace instanga indreapta inmargin marginestanga
marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inalttime
adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine
[-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva
effective antet subsol
2 REFERENCE
3 TEXT

```

```

\startgraphicstext [...1,...] [...2,...] {...3} ... \stopgraphicstext
1 split totdeauna stanga dreapta internOPTextern spatiuspate cutspace instanga indreapta inmargin marginestanga
marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inalttime
adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine
[-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva
effective antet subsol
2 REFERENCE
3 TEXT

```

```

\startintermezzotext [...1,...] [...2,...] {...3} ... \stopintermezzotext
1 split totdeauna stanga dreapta internOPTextern spatiuspate cutspace instanga indreapta inmargin marginestanga
marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inalttime
adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine
[-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva
effective antet subsol
2 REFERENCE
3 TEXT

```

```

\starttabletext [...1,...] [...2,...] {...3} ... \stoptabletext
1 split totdeauna stanga dreapta internOPTextern spatiuspate cutspace instanga indreapta inmargin marginestanga
marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inalttime
adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine
[-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva
effective antet subsol
2 REFERENCE
3 TEXT

```

```

\startfont [...] ... \stopfont
* FONT OPT

```

```

\startfontclass [...] ... \stopfontclass
* fiecare NAME

```

```

\startfontsolution [...] ... \stopfontsolution
* NAME

```

```

\startformula [...*,...] ... \stopformula
* impachetat tight centru incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext

```

$\backslash\text{startformula} [\dots,*\dots] \dots \backslash\text{stopformula}$ *    optiune    =    impachetat <sup>OPT</sup> tight centru incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext *    margine    =    da nu standard DIMENSION *    grid        =    inherits: \snaptogrid
$\backslash\text{startFORMULAformula} [\dots,*\dots] \dots \backslash\text{stopFORMULAformula}$ *    impachetat tight centru incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext instances: sp sd mp md
$\backslash\text{startmdformula} [\dots,*\dots] \dots \backslash\text{stopmdformula}$ *    impachetat tight centru <sup>OPT</sup> incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext
$\backslash\text{startmpformula} [\dots,*\dots] \dots \backslash\text{stopmpformula}$ *    impachetat tight centru <sup>OPT</sup> incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext
$\backslash\text{startsdfformula} [\dots,*\dots] \dots \backslash\text{stopsdfformula}$ *    impachetat tight centru <sup>OPT</sup> incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext
$\backslash\text{startspformula} [\dots,*\dots] \dots \backslash\text{stopspformula}$ *    impachetat tight centru <sup>OPT</sup> incadrat adancime linie jumatatelinie -linie -jumatatelinie inherits: \seteazafonttext
$\backslash\text{startformule} [\dots,*\dots] \dots \backslash\text{stopformule}$ *    + - REFERENCE <sup>OPT</sup>
$\backslash\text{startframed} [\overset{1}{\dots}] [\dots,\overset{2}{\dots},\dots] \dots \backslash\text{stopframed}$ 1    NAME <sup>OPT</sup> <sup>OPT</sup> 2    inherits: \seteazainconjurat
$\backslash\text{startframedcell} [\dots,*\dots] \dots \backslash\text{stopframedcell}$ *    inherits: \seteazainconjurat <sup>OPT</sup>
$\backslash\text{startframedcontent} [\dots] \dots \backslash\text{stopframedcontent}$ *    NAME dezactivat <sup>OPT</sup>
$\backslash\text{startframedrow} [\dots,*\dots] \dots \backslash\text{stopframedrow}$ *    inherits: \seteazainconjurat <sup>OPT</sup>
$\backslash\text{startframedtable} [\overset{1}{\dots}] [\dots,\overset{2}{\dots},\dots] \dots \backslash\text{stopframedtable}$ 1    NAME <sup>OPT</sup> <sup>OPT</sup> 2    inherits: \seteazainconjurat
$\backslash\text{startfundal} [\dots,*\dots] \dots \backslash\text{stopfundal}$ *    inherits: \seteazafundal <sup>OPT</sup>
$\backslash\text{startFUNDAL} [\dots,*\dots] \dots \backslash\text{stopFUNDAL}$ *    inherits: \seteazafundal <sup>OPT</sup> instances: fundal
$\backslash\text{startgridsnapping} [\dots] \dots \backslash\text{stopgridsnapping}$ *    normal standard da strict tolerant sus subsol ambele broad ajustat primul ultim inalt unu jos niciunul linie strut *    box min max centru math math:linie math:jumatatelinie math:-line math:-halfline NAME
$\backslash\text{startgridsnapping} [\dots,*\dots] \dots \backslash\text{stopgridsnapping}$ *    inherits: \definegridsnapping <sup>OPT</sup>
$\backslash\text{starthboxestohbox} \dots \backslash\text{stophboxestohbox}$

$\backslash\mathrm{starthboxregister} \dots \backslash\mathrm{stophboxregister}$ * CSNAME NUMBER
$\backslash\mathrm{startHELP} [\dots] \dots \backslash\mathrm{stopHELP}$ * REFERENCE <small>OPT</small> instances: helptext
$\backslash\mathrm{starthelptext} [\dots] \dots \backslash\mathrm{stophelptext}$ * REFERENCE <small>OPT</small>
$\backslash\mathrm{starthhighlight} [\dots] \dots \backslash\mathrm{stophighlight}$ * NAME
$\backslash\mathrm{starthyphenation} [\dots, \dots] \dots \backslash\mathrm{stophyphenation}$ * original tex implicit hyphenate expanded traditional niciunul
$\backslash\mathrm{startimath} \dots \backslash\mathrm{stopimath}$
$\backslash\mathrm{startimpachetat} [\dots] \dots \backslash\mathrm{stopimpachetat}$ * blank <small>OPT</small>
$\backslash\mathrm{startindentedtext} [\dots] \dots \backslash\mathrm{stopindentedtext}$ * NAME
$\backslash\mathrm{startINDENTEDTEXT} \dots \backslash\mathrm{stopINDENTEDTEXT}$
$\backslash\mathrm{startingust} [\overset{1}{\dots}] [\dots, \dots, \overset{2}{\dots}] \dots \backslash\mathrm{stopingust}$ 1 NAME <small>OPT</small> <small>OPT</small> 2 inherits: \setezaingust
$\backslash\mathrm{startingust} [\dots, \dots, \overset{1}{\dots}] [\dots, \dots, \overset{2}{\dots}] \dots \backslash\mathrm{stopingust}$ 1 inherits: \setezaingust <small>OPT</small> <small>OPT</small> 2 [-+]stanga [-+]centru [-+]dreapta NUMBER*stanga NUMBER*centru NUMBER*dreapta reset reverse
$\backslash\mathrm{startingust} [\overset{1}{\dots}] [\dots, \overset{2}{\dots}] \dots \backslash\mathrm{stopingust}$ 1 NAME <small>OPT</small> <small>OPT</small> 2 [-+]stanga [-+]centru [-+]dreapta NUMBER*stanga NUMBER*centru NUMBER*dreapta reset reverse
$\backslash\mathrm{startinteractiune} [\dots] \dots \backslash\mathrm{stopinteractiune}$ * ascuns NAME
$\backslash\mathrm{startinterface} \dots \dots \backslash\mathrm{stopinterface}$ * tot SPRACHE
$\backslash\mathrm{startintertext} \dots \backslash\mathrm{stopintertext}$
$\backslash\mathrm{startitemgroup} [\overset{1}{\dots}] [\dots, \overset{2}{\dots}] [\dots, \dots, \overset{3}{\dots}] \dots \backslash\mathrm{stopitemgroup}$ 1 NAME <small>OPT</small> <small>OPT</small> 2 inherits: \setupitemgroup 3 inherits: \setupitemgroup
$\backslash\mathrm{startITEMGROUP} [\dots, \overset{1}{\dots}] [\dots, \dots, \overset{2}{\dots}] \dots \backslash\mathrm{stopITEMGROUP}$ 1 inherits: \setupitemgroup <small>OPT</small> <small>OPT</small> 2 inherits: \setupitemgroup instances: itemize
$\backslash\mathrm{startitemize} [\dots, \overset{1}{\dots}] [\dots, \dots, \overset{2}{\dots}] \dots \backslash\mathrm{stopitemize}$ 1 inherits: \setupitemgroup <small>OPT</small> <small>OPT</small> 2 inherits: \setupitemgroup

<pre> \startJScode <sup>1</sup>... <sup>2</sup>... <sup>3</sup>... \stopJScode 1  NAME 2  uses 3  NAME </pre>
<pre> \startJSreamble <sup>1</sup>... <sup>2</sup>... <sup>3</sup>... \stopJSreamble 1  NAME 2  folosit 3  now later </pre>
<pre> \startknockout ... \stopknockout </pre>
<pre> \startlayout [...] ... \stoplayout *  NAME </pre>
<pre> \startlimba [...] ... \stoplimba *  SPRACHE </pre>
<pre> \startlinealignment [...] ... \stoplinealignment *  stanga centru dreapta max </pre>
<pre> \startlinecorrection [...<sup>*</sup>...] ... \stoplinecorrection *  blank inherits: \blanc <sup>OPT</sup> </pre>
<pre> \startlinefiller [<sup>1</sup>...] [...<sup>2</sup>...] ... \stoplinefiller 1  filler NAME <sup>OPT</sup> 2  inherits: \setuplinefiller </pre>
<pre> \startLINENOTE [...] {...} 1  REFERENCE 2  TEXT instances: linenote </pre>
<pre> \startlinenote [...] {...} 1  REFERENCE 2  TEXT </pre>
<pre> \startlinenumbering [<sup>1</sup>...] [...<sup>2</sup>...] ... \stoplinenumbering 1  NAME <sup>OPT</sup> <sup>OPT</sup> 2  continua = da nu    start   = NUMMER    pas     = NUMMER    metoda  = pagina primul urmatorul </pre>
<pre> \startlinenumbering [<sup>1</sup>...] [<sup>2</sup>...] ... \stoplinenumbering 1  NAME <sup>OPT</sup> <sup>OPT</sup> 2  continuu NUMMER </pre>
<pre> \startlinetable ... \stoplinetable </pre>
<pre> \startlinetablebody ... \stoplinetablebody </pre>
<pre> \startlinetablecell [...<sup>*</sup>...] ... \stoplinetablecell *  inherits: \setuplinetable <sup>OPT</sup> </pre>
<pre> \startlinetablehead ... \stoplinetablehead </pre>
<pre> \startlinie [...] *  REFERENCE </pre>

<code>\startliniemargine [...] ... \stopliniemargine</code> <code>*   NUMBER                   OPT</code>
<code>\startliniemargine [...,*=,...] ... \stopliniemargine</code> <code>*   inherits: \setupmarginrule   OPT</code>
<code>\startLINES [...,*=,...] ... \stopLINES</code> <code>*   inherits: \setezalftiii   OPT</code> <code>instances: lines</code>
<code>\startlines [...,*=,...] ... \stoplines</code> <code>*   inherits: \setezalftiii   OPT</code>
<code>\startlocalfootnotes ... \stoplocalfootnotes</code>
<code>\startlocalheadsetup ... \stoplocalheadsetup</code>
<code>\startlocallinecorrection [...,*=,...] ... \stoplocallinecorrection</code> <code>*   blank inherits: \blank                   OPT</code>
<code>\startlocalnotes [...,*=,...] ... \stoplocalnotes</code> <code>*   NAME</code>
<code>\startlocalsetups [...<sup>1</sup>] [...<sup>2</sup>] ... \stoplocalsetups</code> <code>1   grila                   OPT</code> <code>2   NAME</code>
<code>\startlocalsetups ... .. \stoplocalsetups</code> <code>*   NAME</code>
<code>\startlua ... \stoplua</code>
<code>\startluacode ... \stopluacode</code>
<code>\startluaparameterset [...] ... \stopluaparameterset</code> <code>*   NAME</code>
<code>\startluasetups [...<sup>1</sup>] [...<sup>2</sup>] ... \stopluasetups</code> <code>1   grila                   OPT</code> <code>2   NAME</code>
<code>\startluasetups ... .. \stopluasetups</code> <code>*   NAME</code>
<code>\startMPclip {...} ... \stopMPclip</code> <code>*   NAME</code>
<code>\startMPcode {...} ... \stopMPcode</code> <code>*   NAME                   OPT</code>
<code>\startMPdefinitions {...} ... \stopMPdefinitions</code> <code>*   NAME                   OPT</code>
<code>\startMPdrawing [...] ... \stopMPdrawing</code> <code>*   -                   OPT</code>

<pre> \startMPenvironment [...] ... \stopMPenvironment *   reset global +          OPT </pre>
<pre> \startMPextensions {...,*,...} ... \stopMPextensions *   NAME                    OPT </pre>
<pre> \startMPinclusions [<sup>1</sup>...] {<sup>2</sup>...} ... \stopMPinclusions 1   +                      OPT   OPT 2   NAME </pre>
<pre> \startMPinitializations ... \stopMPinitializations </pre>
<pre> \startMPpositiongraphic {<sup>1</sup>...} {<sup>2</sup>...,...} ... \stopMPpositiongraphic 1   NAME                    OPT 2   KEY </pre>
<pre> \startMPpositionmethod {...} ... \stopMPpositionmethod *   NAME </pre>
<pre> \startMPrun {...} ... \stopMPrun *   NAME                    OPT </pre>
<pre> \startmakeup [<sup>1</sup>] [...,<sup>2</sup>...,...] ... \stopmakeup 1   NAME                    OPT 2   inherits: \seteazamakeup </pre>
<pre> \startMAKEUPmakeup [...,*...,...] ... \stopMAKEUPmakeup *   inherits: \seteazamakeup OPT instances: standard page text middle </pre>
<pre> \startmiddlemakeup [...,*...,...] ... \stopmiddlemakeup *   inherits: \seteazamakeup OPT </pre>
<pre> \startpagemakeup [...,*...,...] ... \stoppagemakeup *   inherits: \seteazamakeup OPT </pre>
<pre> \startstandardmakeup [...,*...,...] ... \stopstandardmakeup *   inherits: \seteazamakeup OPT </pre>
<pre> \starttextmakeup [...,*...,...] ... \stoptextmakeup *   inherits: \seteazamakeup OPT </pre>
<pre> \startmarginblock [...] ... \stopmarginblock *   NAME                    OPT </pre>
<pre> \startmarkedcontent [...] ... \stopmarkedcontent *   reset tot NAME          OPT </pre>
<pre> \startmarkpages [...] ... \stopmarkpages *   NAME </pre>
<pre> \startMATHALIGNMENT [...,*...,...] ... \stopMATHALIGNMENT *   inherits: \setupmathalignment OPT instances: align mathalignment </pre>
<pre> \startalign [...,*...,...] ... \stopalign *   inherits: \setupmathalignment </pre>



$\backslash\mathrm{startmathalignment} [\dots\overset{*}{=}\dots] \dots \backslash\mathrm{stopmathalignment}$ * inherits: $\backslash\mathrm{setupmathalignment}^{\mathrm{OPT}}$
$\backslash\mathrm{startMATHCASES} [\dots\overset{*}{=}\dots] \dots \backslash\mathrm{stopMATHCASES}$ * inherits: $\backslash\mathrm{setupmathcases}^{\mathrm{OPT}}$ <b>instances:</b> <code>cases mathcases</code>
$\backslash\mathrm{startcases} [\dots\overset{*}{=}\dots] \dots \backslash\mathrm{stopcases}$ * inherits: $\backslash\mathrm{setupmathcases}^{\mathrm{OPT}}$
$\backslash\mathrm{startmathcases} [\dots\overset{*}{=}\dots] \dots \backslash\mathrm{stopmathcases}$ * inherits: $\backslash\mathrm{setupmathcases}^{\mathrm{OPT}}$
$\backslash\mathrm{startMATHMATRIX} [\dots\overset{*}{=}\dots] \dots \backslash\mathrm{stopMATHMATRIX}$ * inherits: $\backslash\mathrm{setupmathmatrix}^{\mathrm{OPT}}$ <b>instances:</b> <code>matrix mathmatrix</code>
$\backslash\mathrm{startmathmatrix} [\dots\overset{*}{=}\dots] \dots \backslash\mathrm{stopmathmatrix}$ * inherits: $\backslash\mathrm{setupmathmatrix}^{\mathrm{OPT}}$
$\backslash\mathrm{startmatrix} [\dots\overset{*}{=}\dots] \dots \backslash\mathrm{stopmatrix}$ * inherits: $\backslash\mathrm{setupmathmatrix}^{\mathrm{OPT}}$
$\backslash\mathrm{startmathmode} \dots \backslash\mathrm{stopmathmode}$
$\backslash\mathrm{startmathstyle} [\dots, \dots] \dots \backslash\mathrm{stopmathstyle}$ * <code>display text script scriptscript cramped uncramped normal impachetat mic mare NAME</code>
$\backslash\mathrm{startmatrices} [\dots\overset{*}{=}\dots] \dots \backslash\mathrm{stopmatrices}$ * inherits: $\backslash\mathrm{setupmathmatrix}^{\mathrm{OPT}}$
$\backslash\mathrm{startmaxaligned} \dots \backslash\mathrm{stopmaxaligned}$
$\backslash\mathrm{startmediu} [\dots] \dots \backslash\mathrm{stopmediu}$ * <code>FILE *</code>
$\backslash\mathrm{startmediu} \dots \dots \backslash\mathrm{stopmediu}$ * <code>FILE *</code>
$\backslash\mathrm{startmeniuinteractiune} [\dots] \dots \backslash\mathrm{stopmeniuinteractiune}$ * <code>NAME</code>
$\backslash\mathrm{startmiddlealigned} \dots \backslash\mathrm{stopmiddlealigned}$
$\backslash\mathrm{startmixedcolumns} [\overset{1}{\dots}] [\dots\overset{2}{=}\dots] \dots \backslash\mathrm{stopmixedcolumns}$ 1 <code>NAME</code> $\mathrm{OPT}$ $\mathrm{OPT}$ 2 inherits: $\backslash\mathrm{setupmixedcolumns}$
$\backslash\mathrm{startMIXEDCOLUMNS} [\dots\overset{*}{=}\dots] \dots \backslash\mathrm{stopMIXEDCOLUMNS}$ * inherits: $\backslash\mathrm{setupmixedcolumns}^{\mathrm{OPT}}$ <b>instances:</b> <code>itemgroupcolumns boxedcolumns</code>
$\backslash\mathrm{startboxedcolumns} [\dots\overset{*}{=}\dots] \dots \backslash\mathrm{stopboxedcolumns}$ * inherits: $\backslash\mathrm{setupmixedcolumns}^{\mathrm{OPT}}$
$\backslash\mathrm{startitemgroupcolumns} [\dots\overset{*}{=}\dots] \dots \backslash\mathrm{stopitemgroupcolumns}$ * inherits: $\backslash\mathrm{setupmixedcolumns}$ $\mathrm{OPT}$

<pre> \startmode [...,*...] ... \stopmode *   NAME </pre>
<pre> \startmodeset [...,<sup>1</sup>...] {<sup>2</sup>...} ... \stopmodeset 1   NAME implicit 2   CONTENT </pre>
<pre> \startmodule [...*] ... \stopmodule *   FILE </pre>
<pre> \startmoduletestsection ... \stopmoduletestsection </pre>
<pre> \startmodule ... .. \stopmodule *   FILE </pre>
<pre> \startnamedsection [...,<sup>1</sup>] [...,<sup>2</sup>...<sub>OPT</sub>] [...,<sup>3</sup>...<sub>OPT</sub>] ... \stopnamedsection 1   ABSCHNITT 2   titlu           = TEXT     semncarte       = TEXT     marcaje         = TEXT     lista           = TEXT     referinta       = REFERENCE     numarpropriu    = TEXT 3   KEY = VALUE </pre>
<pre> \startnamedsubformulas [...,<sup>1</sup>...] {<sup>2</sup>...} ... \stopnamedsubformulas 1   + - REFERENCE <sub>OPT</sub> 2   TEXT </pre>
<pre> \startnarrower [...,*...] ... \stopnarrower *   [-+]stanga [-+]centru<sup>PT</sup>[-+]dreapta NUMMER*stanga NUMMER*centru NUMMER*dreapta reset reverse </pre>
<pre> \startNARROWER [...,*...] ... \stopNARROWER *   [-+]stanga [-+]centru<sup>PT</sup>[-+]dreapta NUMMER*stanga NUMMER*centru NUMMER*dreapta reset reverse </pre>
<pre> \startnegativ ... \stopnegativ </pre>
<pre> \startnicelyfilledbox [...,<sup>*</sup>...<sub>OPT</sub>] ... \stopnicelyfilledbox *   ltime = DIMENSION     inalttime = DIMENSION     offset = DIMENSION     strut = da nu </pre>
<pre> \startnointerference ... \stopnointerference </pre>
<pre> \startnotallmodes [...,*...] ... \stopnotallmodes *   NAME </pre>
<pre> \startNOTE [...,*...] ... \stopNOTE *   REFERENCE <sub>OPT</sub> instances: footnote endnote </pre>
<pre> \startNOTE [...,<sup>*</sup>...<sub>OPT</sub>] ... \stopNOTE *   titlu = TEXT<sup>OPT</sup>     semncarte = TEXT     lista = TEXT     referinta = REFERENCE instances: footnote endnote </pre>

<pre> \startendnote [...,*...] ... \stopendnote * titlu      = TEXT      OPT   semncarte  = TEXT   lista      = TEXT   referinta  = REFERENCE </pre>
<pre> \startfootnote [...,*...] ... \stopfootnote * titlu      = TEXT      OPT   semncarte  = TEXT   lista      = TEXT   referinta  = REFERENCE </pre>
<pre> \startendnote [...,*...] ... \stopendnote * REFERENCE      OPT </pre>
<pre> \startfootnote [...,*...] ... \stopfootnote * REFERENCE      OPT </pre>
<pre> \startnotext ... \stopnotext </pre>
<pre> \startnotmode [...,*...] ... \stopnotmode * NAME </pre>
<pre> \startopus ... \stopopus </pre>
<pre> \startoutputstream [...*] ... \stopoutputstream * NAME </pre>
<pre> \startoverlay ... \stopoverlay </pre>
<pre> \startoverprint ... \stopoverprint </pre>
<pre> \startpagecolumns [...,*...] ... \stoppagecolumns * inherits: \setuppagecolumns<sup>OPT</sup> </pre>
<pre> \startPAGECOLUMNS ... \stopPAGECOLUMNS </pre>
<pre> \startpagecolumns [...*] ... \stoppagecolumns * NAME      OPT </pre>
<pre> \startpagefigure [...<sup>1</sup>] [...,*<sup>2</sup>...] ... \stoppagefigure 1 FILE      OPT 2 offset = implicit overlay niciunul DIMENSION </pre>
<pre> \startpagelayout [...*] ... \stoppagelayout * pagina paginastanga paginadreaapta </pre>
<pre> \startpar [...<sup>1</sup>] [...,*<sup>2</sup>...] ... \stoppar 1 NAME      OPT      OPT 2 inherits: \setupparagraph </pre>
<pre> \startparagraf [...<sup>1</sup>] [...,*<sup>2</sup>...] ... \stopparagraf 1 NAME      OPT      OPT 2 inherits: \setupparagraph </pre>
<pre> \startparagraphs [...*] ... \stopparagraphs * NAME </pre>

<code>\startparagraphscell ... \stopparagraphscell</code>
<code>\startPARAGRAPHS ... \stopPARAGRAPHS</code>
<code>\startPARALLEL ... \stopPARALLEL</code>
<code>\startparbuilder [...] ... \stopparbuilder</code> <code>* implicit oneline basic NAME</code>
<code>\startplacefloat [...] [...] [...] [...] [...] ... \stopplacefloat</code> 1 SINGULAR 2 titlu = TEXT semncarte = TEXT marcaje = TEXT lista = TEXT locatie = split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol referinta = REFERENCE 3 KEY = VALUE
<code>\startpuneFLOAT [...] [...] [...] [...] [...] ... \stoppuneFLOAT</code> 1 titlu = TEXT semncarte = TEXT marcaje = TEXT lista = TEXT locatie = split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol referinta = REFERENCE 2 KEY = VALUE instances: chemical figure table intermezzo graphic
<code>\startpunechemical [...] [...] [...] [...] [...] ... \stoppunechemical</code> 1 titlu = TEXT semncarte = TEXT marcaje = TEXT lista = TEXT locatie = split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol referinta = REFERENCE 2 KEY = VALUE
<code>\startpunefigure [...] [...] [...] [...] [...] ... \stoppunefigure</code> 1 titlu = TEXT semncarte = TEXT marcaje = TEXT lista = TEXT locatie = split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge text opus reset inaltime adancime [-+]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber niciunul local aici fortat margine [-+]suspenda suspendat inalt ambele centru offset sus subsol auto pagina paginastanga paginadreapta undeva effective antet subsol referinta = REFERENCE 2 KEY = VALUE

```

\startpunegraphic [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] ... \stoppunegraphic
1 titlu = TEXT OPT OPT
  semncarte = TEXT
  marcaje = TEXT
  lista = TEXT
  locatie = split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin
            marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge
            text opus reset inaltime adancime [--]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber
            niciunul local aici fortat margine [--]suspenda suspendat inalt ambele centru offset sus subsol auto
            pagina paginastanga paginadreapta undeva effective antet subsol
  referinta = REFERENCE
2 KEY = VALUE

```

```

\startpuneintermezzo [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] ... \stoppuneintermezzo
1 titlu = TEXT OPT OPT
  semncarte = TEXT
  marcaje = TEXT
  lista = TEXT
  locatie = split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin
            marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge
            text opus reset inaltime adancime [--]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber
            niciunul local aici fortat margine [--]suspenda suspendat inalt ambele centru offset sus subsol auto
            pagina paginastanga paginadreapta undeva effective antet subsol
  referinta = REFERENCE
2 KEY = VALUE

```

```

\startpunetable [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] ... \stoppunetable
1 titlu = TEXT OPT OPT
  semncarte = TEXT
  marcaje = TEXT
  lista = TEXT
  locatie = split totdeauna stanga dreapta intern extern spatiuspate cutspace instanga indreapta inmargin
            marginestanga marginedreapta bordurastanga borduradreapta innermargin outermargin inneredge outeredge
            text opus reset inaltime adancime [--]linie jumatatelinie grila inalt jos ajustat 90 180 270 nonumber
            niciunul local aici fortat margine [--]suspenda suspendat inalt ambele centru offset sus subsol auto
            pagina paginastanga paginadreapta undeva effective antet subsol
  referinta = REFERENCE
2 KEY = VALUE

```

```

\startplacepairedbox [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] ... \stopplacepairedbox
1 NAME OPT
2 inherits: \setuppairedbox

```

```

\startpunePAIREDBOX [...,\stackrel{*}{=},...] ... \stoppunePAIREDBOX
* inherits: \setuppairedbox OPT
instances: legend

```

```

\startpunelegend [...,\stackrel{*}{=},...] ... \stoppunelegend
* inherits: \setuppairedbox OPT

```

```

\startpositioning [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] ... \stoppositioning
1 NAME OPT OPT
2 inherits: \setarepozitie

```

```

\startpositionoverlay {...} ... \stoppositionoverlay
* NAME

```

```

\startpositiv ... \stoppositiv

```

```

\startpostponing [...] ... \stoppostponing
* [--]NUMBER OPT

```

```

\startpostponingnotes ... \stoppostponingnotes

```

```

\startprocessassignmentcommand [...,\stackrel{*}{=},...] ... \stopprocessassignmentcommand
* KEY = VALUE

```

```
\startprocessassignmentlist [...,*=*,...] ... \stopprocessassignmentlist
*   KEY   =  VALUE
```

```
\startprocesscommand [...,*...] ... \stopprocesscommand
* BEFEHL
```

```
\startprocesscommalist [...,*...] ... \stopprocesscommalist
*   BEFEHL
```

```
\startprodus [...] ... \stopprodus
*   FILE   *
```

$$\prod_{i=1}^n \prod_{j=1}^m \prod_{k=1}^l \prod_{l=1}^p \prod_{m=1}^q \prod_{n=1}^r \prod_{o=1}^s \prod_{p=1}^t \prod_{q=1}^u \prod_{r=1}^v \prod_{s=1}^w \prod_{t=1}^x \prod_{u=1}^y \prod_{v=1}^z \prod_{w=1}^{\infty}$$

```
\startproiect [...] ... \stopproiect
*   FILE   *
```

```
\startproject ... .. \stopproject
* FILE *
```

`\startprotectedcolors ... \stopprotectedcolors`

```

\startpublicatie [...] [...,...] ... \stoppublicatie
1  NAME              OPT
2  tag               = REFERENCE
   category          = TEXT
   k                  = REFERENCE
   t                  = TEXT

```

```
\startpuneformula [...,\dot{...}] ... \stoppuneformula
*   titlu      = TEXT                OPT
    suffix     = TEXT
    referinta  = + - REFERENCE
```

`\startpuneformula [...,*...] ... \stoppuneformula`  
 \* + - REFERENCE OPT

`\startrandomized ... \stoprandomized`

```
\startrawsetups [...] [...] ... \stoprawsetups
1  grila
2  NAME
```

```
\startrawsetups ... .. \stoprawsetups
* NAME
```

```
\startreadingfile ... \stopreadingfile
```

```
\startregime [...] ... \stopregime
* inherits: \enableregime
```

```
\startregister [^1] [^2] [^3] [^4] {^5+^6+^7+^8+^9+^10+^11+^12+^13+^14+^15+^16+^17+^18+^19+^20+^21+^22+^23+^24+^25+^26+^27+^28+^29+^30+^31+^32+^33+^34+^35+^36+^37+^38+^39+^40+^41+^42+^43+^44+^45+^46+^47+^48+^49+^50+^51+^52+^53+^54+^55+^56+^57+^58+^59+^60+^61+^62+^63+^64+^65+^66+^67+^68+^69+^70+^71+^72+^73+^74+^75+^76+^77+^78+^79+^80+^81+^82+^83+^84+^85+^86+^87+^88+^89+^90+^91+^92+^93+^94+^95+^96+^97+^98+^99+^100+^101+^102+^103+^104+^105+^106+^107+^108+^109+^110+^111+^112+^113+^114+^115+^116+^117+^118+^119+^120+^121+^122+^123+^124+^125+^126+^127+^128+^129+^130+^131+^132+^133+^134+^135+^136+^137+^138+^139+^140+^141+^142+^143+^144+^145+^146+^147+^148+^149+^150+^151+^152+^153+^154+^155+^156+^157+^158+^159+^160+^161+^162+^163+^164+^165+^166+^167+^168+^169+^170+^171+^172+^173+^174+^175+^176+^177+^178+^179+^180+^181+^182+^183+^184+^185+^186+^187+^188+^189+^190+^191+^192+^193+^194+^195+^196+^197+^198+^199+^200+^201+^202+^203+^204+^205+^206+^207+^208+^209+^210+^211+^212+^213+^214+^215+^216+^217+^218+^219+^220+^221+^222+^223+^224+^225+^226+^227+^228+^229+^230+^231+^232+^233+^234+^235+^236+^237+^238+^239+^240+^241+^242+^243+^244+^245+^246+^247+^248+^249+^250+^251+^252+^253+^254+^255+^256+^257+^258+^259+^260+^261+^262+^263+^264+^265+^266+^267+^268+^269+^270+^271+^272+^273+^274+^275+^276+^277+^278+^279+^280+^281+^282+^283+^284+^285+^286+^287+^288+^289+^290+^291+^292+^293+^294+^295+^296+^297+^298+^299+^300+^301+^302+^303+^304+^305+^306+^307+^308+^309+^310+^311+^312+^313+^314+^315+^316+^317+^318+^319+^320+^321+^322+^323+^324+^325+^326+^327+^328+^329+^330+^331+^332+^333+^334+^335+^336+^337+^338+^339+^340+^341+^342+^343+^344+^345+^346+^347+^348+^349+^350+^351+^352+^353+^354+^355+^356+^357+^358+^359+^360+^361+^362+^363+^364+^365+^366+^367+^368+^369+^370+^371+^372+^373+^374+^375+^376+^377+^378+^379+^380+^381+^382+^383+^384+^385+^386+^387+^388+^389+^390+^391+^392+^393+^394+^395+^396+^397+^398+^399+^400+^401+^402+^403+^404+^405+^406+^407+^408+^409+^410+^411+^412+^413+^414+^415+^416+^417+^418+^419+^420+^421+^422+^423+^424+^425+^426+^427+^428+^429+^430+^431+^432+^433+^434+^435+^436+^437+^438+^439+^440+^441+^442+^443+^444+^445+^446+^447+^448+^449+^450+^451+^452+^453+^454+^455+^456+^457+^458+^459+^460+^461+^462+^463+^464+^465+^466+^467+^468+^469+^470+^471+^472+^473+^474+^475+^476+^477+^478+^479+^480+^481+^482+^483+^484+^485+^486+^487+^488+^489+^490+^491+^492+^493+^494+^495+^496+^497+^498+^499+^500+^501+^502+^503+^504+^505+^506+^507+^508+^509+^510+^511+^512+^513+^514+^515+^516+^517+^518+^519+^520+^521+^522+^523+^524+^525+^526+^527+^528+^529+^530+^531+^532+^533+^534+^535+^536+^537+^538+^539+^540+^541+^542+^543+^544+^545+^546+^547+^548+^549+^550+^551+^552+^553+^554+^555+^556+^557+^558+^559+^560+^561+^562+^563+^564+^565+^566+^567+^568+^569+^570+^571+^572+^573+^574+^575+^576+^577+^578+^579+^580+^581+^582+^583+^584+^585+^586+^587+^588+^589+^590+^591+^592+^593+^594+^595+^596+^597+^598+^599+^600+^601+^602+^603+^604+^605+^606+^607+^608+^609+^610+^611+^612+^613+^614+^615+^616+^617+^618+^619+^620+^621+^622+^623+^624+^625+^626+^627+^628+^629+^630+^631+^632+^633+^634+^635+^636+^637+^638+^639+^640+^641+^642+^643+^644+^645+^646+^647+^648+^649+^650+^651+^652+^653+^654+^655+^656+^657+^658+^659+^660+^661+^662+^663+^664+^665+^666+^667+^668+^669+^670+^671+^672+^673+^674+^675+^676+^677+^678+^679+^680+^681+^682+^683+^684+^685+^686+^687+^688+^689+^690+^691+^692+^693+^694+^695+^696+^697+^698+^699+^700+^701+^702+^703+^704+^705+^706+^707+^708+^709+^710+^711+^712+^713+^714+^715+^716+^717+^718+^719+^720+^721+^722+^723+^724+^725+^726+^727+^728+^729+^730+^731+^732+^733+^734+^735+^736+^737+^738+^739+^740+^741+^742+^743+^744+^745+^746+^747+^748+^749+^750+^751+^752+^753+^754+^755+^756+^757+^758+^759+^760+^761+^762+^763+^764+^765+^766+^767+^768+^769+^770+^771+^772+^773+^774+^775+^776+^777+^778+^779+^780+^781+^782+^783+^784+^785+^786+^787+^788+^789+^790+^791+^792+^793+^794+^795+^796+^797+^798+^799+^800+^801+^802+^803+^804+^805+^806+^807+^808+^809+^810+^811+^812+^813+^814+^815+^816+^817+^818+^819+^820+^821+^822+^823+^824+^825+^826+^827+^828+^829+^830+^831+^832+^833+^834+^835+^836+^837+^838+^839+
```

<pre> \startreusableMPgraphic {...} {...<sup>2</sup>...} ... \stopreusableMPgraphic 1  NAME                                OPT 2  KEY </pre>
<pre> \starttriglatext {...} ... \stoptriglatext *  TEXT </pre>
<pre> \startruby [...] ... \stopruby *  NAME </pre>
<pre> \startscript [...] ... \stopscript *  hangul hanzi nihongo ethiopic thai test NAME </pre>
<pre> \startsectionblock [...<sup>1</sup>] [...<sup>2</sup>...<sup>2</sup>...] ... \stopsectionblock 1  NAME                                OPT 2  semncarte = TEXT    inherits: \seteazablocsectionue </pre>
<pre> \startSECTIONBLOCK [...<sup>*</sup>...<sup>*</sup>...] ... \stopSECTIONBLOCK *  semncarte = TEXT                                OPT    inherits: \seteazablocsectionue instances: frontmatter bodymatter appendices backmatter </pre>
<pre> \startappendices [...<sup>*</sup>...<sup>*</sup>...] ... \stopappendices *  semncarte = TEXT                                OPT    inherits: \seteazablocsectionue </pre>
<pre> \startbackmatter [...<sup>*</sup>...<sup>*</sup>...] ... \stopbackmatter *  semncarte = TEXT                                OPT    inherits: \seteazablocsectionue </pre>
<pre> \startbodymatter [...<sup>*</sup>...<sup>*</sup>...] ... \stopbodymatter *  semncarte = TEXT                                OPT    inherits: \seteazablocsectionue </pre>
<pre> \startfrontmatter [...<sup>*</sup>...<sup>*</sup>...] ... \stopfrontmatter *  semncarte = TEXT                                OPT    inherits: \seteazablocsectionue </pre>
<pre> \startsectionlevel [...<sup>1</sup>...] [...<sup>2</sup>...<sup>2</sup>...] [...<sup>3</sup>...<sup>3</sup>...] ... \stopsectionlevel 1  NAME                                OPT      OPT      OPT 2  titlu          = TEXT    semncarte      = TEXT    marcaje        = TEXT    lista          = TEXT    referinta      = REFERENCE    numarpropriu   = TEXT 3  KEY = VALUE </pre>
<pre> \startSECTION [...<sup>1</sup>...<sup>1</sup>...] [...<sup>2</sup>...<sup>2</sup>...] ... \stopSECTION 1  titlu          = TEXT OPT      OPT    semncarte      = TEXT    marcaje        = TEXT    lista          = TEXT    referinta      = REFERENCE    numarpropriu   = TEXT 2  KEY = VALUE instances: part chapter section subsection subsubsection subsubsubsection subsubsubsubsection title subject subsubject subsubsubject subsubsubsubject subsubsubsubsubject </pre>

```

\startchapter [...1...2...] ... \stopchapter
1 titlu          = TEXTOPT
  semncarte      = TEXT
  marcaje        = TEXT
  lista          = TEXT
  referinta      = REFERENCE
  numarpropriu   = TEXT
2 KEY = VALUE

```

```

\startpart [...1...2...] ... \stoppart
1 titlu          = TEXTOPT
  semncarte      = TEXT
  marcaje        = TEXT
  lista          = TEXT
  referinta      = REFERENCE
  numarpropriu   = TEXT
2 KEY = VALUE

```

```

\startsection [...1...2...] ... \stopsection
1 titlu          = TEXTOPT
  semncarte      = TEXT
  marcaje        = TEXT
  lista          = TEXT
  referinta      = REFERENCE
  numarpropriu   = TEXT
2 KEY = VALUE

```

```

\startsubject [...1...2...] ... \stopsubject
1 titlu          = TEXTOPT
  semncarte      = TEXT
  marcaje        = TEXT
  lista          = TEXT
  referinta      = REFERENCE
  numarpropriu   = TEXT
2 KEY = VALUE

```

```

\startsubsection [...1...2...] ... \stopsubsection
1 titlu          = TEXTOPT
  semncarte      = TEXT
  marcaje        = TEXT
  lista          = TEXT
  referinta      = REFERENCE
  numarpropriu   = TEXT
2 KEY = VALUE

```

```

\startsubsubject [...1...2...] ... \stopsubsubject
1 titlu          = TEXTOPT
  semncarte      = TEXT
  marcaje        = TEXT
  lista          = TEXT
  referinta      = REFERENCE
  numarpropriu   = TEXT
2 KEY = VALUE

```

```

\startsubsubsection [...1...2...] ... \stopsubsubsection
1 titlu          = TEXTOPT
  semncarte      = TEXT
  marcaje        = TEXT
  lista          = TEXT
  referinta      = REFERENCE
  numarpropriu   = TEXT
2 KEY = VALUE

```

```

\startsubsubsubject [...1...2...] ... \stopsubsubsubject
1 titlu          = TEXTOPT
  semncarte      = TEXT
  marcaje        = TEXT
  lista          = TEXT
  referinta      = REFERENCE
  numarpropriu   = TEXT
2 KEY = VALUE

```



<pre> \startsubsubsubsection [...,\subscript{1}...,...] [...,\subscript{2}...,...] ... \stopsubsubsubsection 1  titlu           = TEXT    semncarte       = TEXT    marcaje         = TEXT    lista           = TEXT    referinta       = REFERENCE    numarpropriu    = TEXT 2  KEY = VALUE </pre>
<pre> \startsubsubsubsubject [...,\subscript{1}...,...] [...,\subscript{2}...,...] ... \stopsubsubsubsubject 1  titlu           = TEXT    semncarte       = TEXT    marcaje         = TEXT    lista           = TEXT    referinta       = REFERENCE    numarpropriu    = TEXT 2  KEY = VALUE </pre>
<pre> \startsubsubsubsubsubsection [...,\subscript{1}...,...] [...,\subscript{2}...,...] ... \stopsubsubsubsubsubsection 1  titlu           = TEXT    semncarte       = TEXT    marcaje         = TEXT    lista           = TEXT    referinta       = REFERENCE    numarpropriu    = TEXT 2  KEY = VALUE </pre>
<pre> \startsubsubsubsubsubsubject [...,\subscript{1}...,...] [...,\subscript{2}...,...] ... \stopsubsubsubsubsubsubject 1  titlu           = TEXT    semncarte       = TEXT    marcaje         = TEXT    lista           = TEXT    referinta       = REFERENCE    numarpropriu    = TEXT 2  KEY = VALUE </pre>
<pre> \starttitle [...,\subscript{1}...,...] [...,\subscript{2}...,...] ... \stoptitle 1  titlu           = TEXT    semncarte       = TEXT    marcaje         = TEXT    lista           = TEXT    referinta       = REFERENCE    numarpropriu    = TEXT 2  KEY = VALUE </pre>
<pre> \startsetups [...,\subscript{1}...] [...,\subscript{2}...] ... \stopsetups 1  grila           = TEXT 2  NAME </pre>
<pre> \startsetups ... .. \stopsetups *  NAME </pre>
<pre> \startshift [...,\subscript{1}...] ... \stopshift *  NAME </pre>
<pre> \startsidebar [...,\subscript{1}...] [...,\subscript{2}...,...] ... \stopsidebar 1  NAME           = TEXT 2  inherits: \setupsidebar </pre>
<pre> \startsimplecolumns [...,\subscript{1}...,...] ... \stopsimplecolumns *  inherits: \setsimplecolumnhsides </pre>
<pre> \startspecialitem [...,\subscript{1}...] [...,\subscript{2}...,...] ... \stopspecialitem 1  element        = TEXT 2  REFERENCE </pre>



<code>\startsubsentence ... \stopsubsentence</code>
<code>\startsubsoltable [...]</code> ... <code>\stopsubsoltable</code> * NAME
<code>\startsubstack ... \stopsubstack</code>
<code>\startsuspendat [...<sup>1</sup>...<sup>2</sup>...] {...}</code> ... <code>\stopsuspendat</code> 1 distanta = DIMENSION OPT n = NUMMER locatie = stanga dreapta 2 CONTENT
<code>\startsuspendat [...<sup>1</sup>] {...<sup>2</sup>}</code> ... <code>\stopsuspendat</code> 1 stanga dreapta OPT 2 CONTENT
<code>\startsymbolset [...<sup>1</sup>] [...<sup>2</sup>...]<sup>2</sup>...</code> ... <code>\stopsymbolset</code> 1 NAME OPT 2 font = FONT
<code>\startTABLE [...<sup>*</sup>...]<sup>*</sup>...</code> ... <code>\stopTABLE</code> * inherits: \setupTABLE
<code>\startTABLEbody [...<sup>*</sup>...]<sup>*</sup>...</code> ... <code>\stopTABLEbody</code> * inherits: \setupTABLE OPT
<code>\startTABLEfoot [...<sup>*</sup>...]<sup>*</sup>...</code> ... <code>\stopTABLEfoot</code> * inherits: \setupTABLE OPT
<code>\startTABLEhead [...<sup>*</sup>...]<sup>*</sup>...</code> ... <code>\stopTABLEhead</code> * inherits: \setupTABLE OPT
<code>\startTABLEnext [...<sup>*</sup>...]<sup>*</sup>...</code> ... <code>\stopTABLEnext</code> * inherits: \setupTABLE OPT
<code>\starttabellele [...]</code> ... <code>\stoptabellele</code> * TEMPLATE
<code>\starttabellele [...]</code> ... <code>\stoptabellele</code> * NAME
<code>\starttabelul [...<sup>1</sup>...]<sup>2</sup>...</code> ... <code>\stoptabelul</code> 1 TEMPLATE OPT 2 inherits: \seteazatabele
<code>\starttabelul [...<sup>1</sup>] [...<sup>2</sup>...]<sup>2</sup>...</code> ... <code>\stoptabelul</code> 1 NAME OPT 2 inherits: \seteazatabele
<code>\starttabulate [...<sup>1</sup>...]<sup>2</sup>...</code> ... <code>\stoptabulate</code> 1 TEMPLATE OPT OPT 2 inherits: \seteazatabulatori
<code>\starttabulatehead [...]<sup>*</sup>...</code> ... <code>\stoptabulatehead</code> * NAME OPT
<code>\starttabulatetail [...]<sup>*</sup>...</code> ... <code>\stoptabulatetail</code> * NAME OPT

$\backslash\text{startTABULATE} [\text{...}] [\text{...}, \text{...} \overset{2}{=}\text{...}, \text{...}] \dots \backslash\text{stopTABULATE}$ 1    NAME                    OPT                    OPT 2    inherits: \seteazatabulatori instances: legend fact
$\backslash\text{startfact} [\text{...}] [\text{...}, \text{...} \overset{2}{=}\text{...}, \text{...}] \dots \backslash\text{stopfact}$ 1    NAME                    OPT                    OPT 2    inherits: \seteazatabulatori
$\backslash\text{startlegend} [\text{...}] [\text{...}, \text{...} \overset{2}{=}\text{...}, \text{...}] \dots \backslash\text{stoplegend}$ 1    NAME                    OPT                    OPT 2    inherits: \seteazatabulatori
$\backslash\text{startTABULATION} [\text{...}] [\text{...}, \text{...} \overset{2}{=}\text{...}, \text{...}] \dots \backslash\text{stopTABULATION}$ 1    NAME                    OPT                    OPT 2    inherits: \setuptabulation
$\backslash\text{starttexcode} \dots \backslash\text{stoptexcode}$
$\backslash\text{starttexdefinition} \overset{1}{\dots} \overset{2}{\dots} \overset{3}{\dots} \overset{4}{\dots} \overset{5}{\dots} \overset{6}{\dots} \overset{7}{\dots} \dots \backslash\text{stoptexdefinition}$ 1    spaces nospaces                    OPT    OPT    OPT    OPT    OPT    OPT    OPT 2    global 3    unexpanded 4    expanded 5    singleempty doubleempty tripleempty quadrupleempty quintupleempty sextupleempty singleargument doubleargument tripleargument quadrupleargument quintupleargument sextupleargument 6    NAME 7    TEMPLATE
$\backslash\text{starttext} \dots \backslash\text{stoptext}$
$\backslash\text{starttextajutator} [\text{...}] \dots \backslash\text{stoptextajutator}$ *    REFERENCE                    OPT
$\backslash\text{starttextbackground} [\text{...}] [\text{...}, \text{...} \overset{2}{=}\text{...}, \text{...}] \dots \backslash\text{stoptextbackground}$ 1    NAME                    OPT 2    inherits: \setuptextbackground
$\backslash\text{starttextbackgroundmanual} \dots \backslash\text{stoptextbackgroundmanual}$
$\backslash\text{startTEXTBACKGROUND} [\text{...}, \text{...} \overset{*}{=}\text{...}, \text{...}] \dots \backslash\text{stopTEXTBACKGROUND}$ *    inherits: \setuptextbackground OPT
$\backslash\text{starttextcolor} [\text{...}] \dots \backslash\text{stoptextcolor}$ *    COLOR
$\backslash\text{starttextcolorintent} \dots \backslash\text{stoptextcolorintent}$
$\backslash\text{startLABELtext} [\text{...}] [\text{...}] \dots \backslash\text{stopLABELtext}$ 1    SPRACHE                    OPT 2    KEY instances: head label mathlabel taglabel unit operator prefix suffix btxlabel
$\backslash\text{startbtxlabeltext} [\text{...}] [\text{...}] \dots \backslash\text{stopbtxlabeltext}$ 1    SPRACHE                    OPT 2    KEY
$\backslash\text{startheadtext} [\text{...}] [\text{...}] \dots \backslash\text{stopheadtext}$ 1    SPRACHE                    OPT 2    KEY

$\backslash\text{startlabeltext}$ [...] [ <sup>1</sup> ...] [...] ... $\backslash\text{stoplabeltext}$ 1    SPRACHE                    OPT 2    KEY
$\backslash\text{startmathlabeltext}$ [...] [ <sup>1</sup> ...] [ <sup>2</sup> ...] ... $\backslash\text{stopmathlabeltext}$ 1    SPRACHE                    OPT 2    KEY
$\backslash\text{startoperatortext}$ [...] [ <sup>1</sup> ...] [ <sup>2</sup> ...] ... $\backslash\text{stopoperatortext}$ 1    SPRACHE                    OPT 2    KEY
$\backslash\text{startprefixtext}$ [...] [ <sup>1</sup> ...] [ <sup>2</sup> ...] ... $\backslash\text{stopprefixtext}$ 1    SPRACHE                    OPT 2    KEY
$\backslash\text{startsuffixtext}$ [...] [ <sup>1</sup> ...] [ <sup>2</sup> ...] ... $\backslash\text{stopsuffixtext}$ 1    SPRACHE                    OPT 2    KEY
$\backslash\text{starttaglabeltext}$ [...] [ <sup>1</sup> ...] [ <sup>2</sup> ...] ... $\backslash\text{stoptaglabeltext}$ 1    SPRACHE                    OPT 2    KEY
$\backslash\text{startunittext}$ [...] [ <sup>1</sup> ...] [ <sup>2</sup> ...] ... $\backslash\text{stopunittext}$ 1    SPRACHE                    OPT 2    KEY
$\backslash\text{starttextflow}$ [...] ... $\backslash\text{stoptextflow}$ *    NAME
$\backslash\text{startFRAMEDTEXT}$ [...] [...] [ <sup>1</sup> ...] [...] [ <sup>2</sup> ...] [...] ... $\backslash\text{stopFRAMEDTEXT}$ 1    stanga dreapta centr@Pniciunul    OPT 2    inherits: \setupframedtext <b>instances: framedtext</b>
$\backslash\text{startframedtext}$ [...] [...] [ <sup>1</sup> ...] [...] [ <sup>2</sup> ...] [...] ... $\backslash\text{stopframedtext}$ 1    stanga dreapta centr@Pniciunul    OPT 2    inherits: \setupframedtext
$\backslash\text{starttitlu}$ [...] [ <sup>1</sup> ...] [...] { <sup>2</sup> ...} ... $\backslash\text{stoptitlu}$ 1    REFERENCE                    OPT 2    TEXT
$\backslash\text{starttokenlist}$ [...] ... $\backslash\text{stoptokenlist}$ *    NAME
$\backslash\text{starttokens}$ [...] ... $\backslash\text{stoptokens}$ *    NAME
$\backslash\text{starttransparent}$ [...] ... $\backslash\text{stoptransparent}$ *    COLOR
$\backslash\text{starttypescript}$ [...] [ <sup>1</sup> ...] [...] [ <sup>2</sup> ...] [...] [...] [ <sup>3</sup> ...] [...] ... $\backslash\text{stoptypescript}$ 1    serif sans mono math handwriting calligraphy    OPT    OPT    OPT 2    NAME 3    size nume
$\backslash\text{starttypescriptcollection}$ [...] ... $\backslash\text{stoptypescriptcollection}$ *    NAME

<pre> \startTYPING [...,*=...,...] ... \stopTYPING * inherits: \seteazatyping<sup>OPT</sup> instances: typing LUA MP PARSEDXML TEX XML </pre>
<pre> \startTYPING [...,*=...,...] ... \stopTYPING * continuu<sup>OPT</sup> instances: typing LUA MP PARSEDXML TEX XML </pre>
<pre> \startLUA [...,*=...,...] ... \stopLUA * continuu<sup>OPT</sup> </pre>
<pre> \startMP [...,*=...,...] ... \stopMP * continuu<sup>OPT</sup> </pre>
<pre> \startPARSEDXML [...,*=...,...] ... \stopPARSEDXML * continuu<sup>OPT</sup> </pre>
<pre> \startTEX [...,*=...,...] ... \stopTEX * continuu<sup>OPT</sup> </pre>
<pre> \starttyping [...,*=...,...] ... \stoptyping * continuu<sup>OPT</sup> </pre>
<pre> \startXML [...,*=...,...] ... \stopXML * continuu<sup>OPT</sup> </pre>
<pre> \startLUA [...,*=...,...] ... \stopLUA * inherits: \seteazatyping<sup>OPT</sup> </pre>
<pre> \startMP [...,*=...,...] ... \stopMP * inherits: \seteazatyping<sup>OPT</sup> </pre>
<pre> \startPARSEDXML [...,*=...,...] ... \stopPARSEDXML * inherits: \seteazatyping<sup>OPT</sup> </pre>
<pre> \startTEX [...,*=...,...] ... \stopTEX * inherits: \seteazatyping<sup>OPT</sup> </pre>
<pre> \starttyping [...,*=...,...] ... \stoptyping * inherits: \seteazatyping<sup>OPT</sup> </pre>
<pre> \startXML [...,*=...,...] ... \stopXML * inherits: \seteazatyping<sup>OPT</sup> </pre>
<pre> \startuniqueMPgraphic {...} {...,<sup>2</sup>...} ... \stopuniqueMPgraphic 1 NAME<sup>1</sup> 2 KEY<sup>OPT</sup> </pre>
<pre> \startuniqueMPpagegraphic {...} {...,<sup>2</sup>...} ... \stopuniqueMPpagegraphic 1 NAME<sup>1</sup> 2 KEY<sup>OPT</sup> </pre>
<pre> \startusableMPgraphic {...} {...,<sup>2</sup>...} ... \stopusableMPgraphic 1 NAME<sup>1</sup> 2 KEY<sup>OPT</sup> </pre>

$\backslash\text{startuseMPgraphic}$ $\{...\}^1 \{...\}^2 \dots \backslash\text{stopuseMPgraphic}$ 1 NAME OPT 2 KEY
$\backslash\text{startusemathstyleparameter}$ $\backslash.* \dots \backslash\text{stopusemathstyleparameter}$ * CSNAME
$\backslash\text{startuserdata}$ $[...]^1 [...\dots]^2 \dots \backslash\text{stopuserdata}$ 1 NAME OPT OPT 2 KEY = VALUE
$\backslash\text{startusingbtxs specification}$ $[...]^* \dots \backslash\text{stopusingbtxs specification}$ * NAME
$\backslash\text{startvboxregister}$ $.* \dots \backslash\text{stopvboxregister}$ * CSNAME NUMBER
$\backslash\text{startvboxto hbox}$ $\dots \backslash\text{stopvboxto hbox}$
$\backslash\text{startvboxto hbox separator}$ $\dots \backslash\text{stopvboxto hbox separator}$
$\backslash\text{startviewerlayer}$ $[...]^* \dots \backslash\text{stopviewerlayer}$ * NAME
$\backslash\text{startVIEWERLAYER}$ $\dots \backslash\text{stopVIEWERLAYER}$
$\backslash\text{startvtopregister}$ $.* \dots \backslash\text{stopvtopregister}$ * CSNAME NUMBER
$\backslash\text{startxcell}$ $[...]^1 [...\dots]^2 \dots \backslash\text{stopxcell}$ 1 NAME OPT OPT 2 nx = NUMBER ny = NUMBER nc = NUMBER nr = NUMBER inherits: $\backslash\text{setupxtable}$
$\backslash\text{startxcellgroup}$ $[...]^1 [...\dots]^2 \dots \backslash\text{stopxcellgroup}$ 1 NAME OPT OPT 2 inherits: $\backslash\text{setupxtable}$
$\backslash\text{startxcolumn}$ $[...\dots]^* \dots \backslash\text{stopxcolumn}$ * inherits: $\backslash\text{setupxtable}^{\text{PT}}$
$\backslash\text{startxcolumn}$ $[...]^* \dots \backslash\text{stopxcolumn}$ * NAME OPT
$\backslash\text{startxgroup}$ $[...]^1 [...\dots]^2 \dots \backslash\text{stopxgroup}$ 1 NAME OPT OPT 2 inherits: $\backslash\text{setupxtable}$
$\backslash\text{startxmldisplayverbatim}$ $[...]^* \dots \backslash\text{stopxmldisplayverbatim}$ * NAME
$\backslash\text{startxmllineverbatim}$ $[...]^* \dots \backslash\text{stopxmllineverbatim}$ * NAME
$\backslash\text{startxmlraw}$ $\dots \backslash\text{stopxmlraw}$

$\backslash\text{startxmlsetups}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...] ... $\backslash\text{stopxmlsetups}$ 1 grila OPT 2 NAME
$\backslash\text{startxmlsetups}$ ... $\backslash\text{stopxmlsetups}$ * NAME
$\backslash\text{startxrow}$ [ <sup>1</sup> ...] [..., <sup>2</sup> ...,...] ... $\backslash\text{stopxrow}$ 1 NAME OPT OPT 2 inherits: \setupxtable
$\backslash\text{startxrowgroup}$ [ <sup>1</sup> ...] [..., <sup>2</sup> ...,...] ... $\backslash\text{stopxrowgroup}$ 1 NAME OPT OPT 2 inherits: \setupxtable
$\backslash\text{startxtable}$ [..., <sup>*</sup> ...,...] ... $\backslash\text{stopxtable}$ * inherits: \setupxtable
$\backslash\text{startxtablebody}$ [..., <sup>*</sup> ...,...] ... $\backslash\text{stopxtablebody}$ * inherits: \setupxtable OPT
$\backslash\text{startxtablebody}$ [...] ... $\backslash\text{stopxtablebody}$ * NAME OPT
$\backslash\text{startxtablefoot}$ [..., <sup>*</sup> ...,...] ... $\backslash\text{stopxtablefoot}$ * inherits: \setupxtable OPT
$\backslash\text{startxtablefoot}$ [...] ... $\backslash\text{stopxtablefoot}$ * NAME OPT
$\backslash\text{startxtablehead}$ [..., <sup>*</sup> ...,...] ... $\backslash\text{stopxtablehead}$ * inherits: \setupxtable OPT
$\backslash\text{startxtablehead}$ [...] ... $\backslash\text{stopxtablehead}$ * NAME OPT
$\backslash\text{startxtablenext}$ [..., <sup>*</sup> ...,...] ... $\backslash\text{stopxtablenext}$ * inherits: \setupxtable OPT
$\backslash\text{startxtablenext}$ [...] ... $\backslash\text{stopxtablenext}$ * NAME OPT
$\backslash\text{startXTABLE}$ [..., <sup>*</sup> ...,...] ... $\backslash\text{stopXTABLE}$ * inherits: \setupxtable OPT
$\backslash\text{startxtable}$ [...] ... $\backslash\text{stopxtable}$ * NAME OPT
$\backslash\text{stivacampuri}$ [ <sup>1</sup> ] [..., <sup>2</sup> ...] [..., <sup>3</sup> ...,...] 1 NAME OPT OPT 2 NAME 3 inherits: \setupfieldcategory
$\backslash\text{stopLINENOTE}$ [...] * REFERENCE instances: linenote



\stoplinenote [...] *   REFERENCE
\stoplinie [...] *   REFERENCE
\stopregister [...] [...] 1   NAME 2   NAME
\stopstructurepageregister [...] [...] 1   NAME 2   NAME
\strictdoifelsenextoptional {...} {...} 1   TRUE 2   FALSE
\strictdoifnextoptionalelse {...} {...} 1   TRUE 2   FALSE
\stripcharacter ... \from ... \to ... 1   CHARACTER 2   TEXT 3   CSNAME
\strippedcsname \*... *   CSNAME
\strippedcsname ... *   TEXT
\stripspaces \from ... \to ... 1   TEXT 2   CSNAME
\structurelistuservariable {...} *   KEY
\structurenumber
\structuretitle
\structureuservariable {...} *   KEY
\structurevariable {...} *   KEY
\strut
\strutdp
\strutgap
\strutht

<code>\struthtdp</code>
<code>\struttedbox {...}</code> <code>*   CONTENT</code>
<code>\strutwd</code>
<code>\style [...<sup>1</sup>...<sup>2</sup>...] {...}</code> <code>1   inherits: \setupstyle</code> <code>2   TEXT</code>
<code>\styleinstance [...]</code> <code>*   NAME</code>
<code>\style [...<sup>1</sup>] {...<sup>2</sup>}</code> <code>1   NAME FONT</code> <code>2   TEXT</code>
<code>\STYLE {...}</code> <code>*   TEXT</code>
<code>\subpagenumber</code>
<code>\subsentence {...}</code> <code>*   CONTENT</code>
<code>\substituteincommalist {...} {...} \<sup>3</sup>...</code> <code>1   TEXT</code> <code>2   TEXT</code> <code>3   CSNAME</code>
<code>\subtractfeature [...]</code> <code>*   NAME</code>
<code>\subtractfeature {...}</code> <code>*   NAME</code>
<code>\swapcounts \<sup>1</sup>... \<sup>2</sup>...</code> <code>1   CSNAME</code> <code>2   CSNAME</code>
<code>\swapdimens \<sup>1</sup>... \<sup>2</sup>...</code> <code>1   CSNAME</code> <code>2   CSNAME</code>
<code>\swapface</code>
<code>\swapmacros \<sup>1</sup>... \<sup>2</sup>...</code> <code>1   CSNAME</code> <code>2   CSNAME</code>
<code>\swaptypeface</code>
<code>\switchstyleonly [...]</code> <code>*   rm ss tt hw cg roman serif regular sans sansserif suport type teletype mono scrismanual caligrafic</code>
<code>\switchstyleonly \<sup>*</sup>...</code> <code>*   CSNAME</code>

```
\switchtocolour [...]
```

\* COLOR

`\switchtointerlinespace` [...<sup>1</sup>,...] [...<sup>2</sup>...]

1 NAME

OPT

```
2 inherits: \seteazaspatiuinterliniar
```

`\switchtointerlinespace [...,*,...]`

```
* on dezactivat reset auto mic mediu mare NUMMER DIMENSION
```

`\switchtointerlinespace [...]`

\* NAME

`\symbolreference [...]`

## \* REFERENCE

\synchronizeblank

\ synchronizeindenting

`\synchronizemarking [...]1 [...]2 [...]3`

1 BESCHRIFTUNG

OPT

2 NUMMER

3 mentine

`\synchronizeoutputstreams [...,*,...]`

\* NAME

`\synchronizestrut {...}`

```
* da nu auto cap ajustat linie implicit CHARACTER
```

`\synchronizewhitespace`

`\synctexblockfilename {.*.}`

\* FILE

\synctexresetfilename

```
\synctexsetfilename {...}
```

\* FILE

`\SYNONYM [...]1 {...}2 {...}3`

1 NAME

OPT

1	NAME
2	TEXT

3     CONTENT

instances: abbreviation

$$\backslash abbreviation \left[ \dots \right] \{ \dots \} \{ \dots \}$$

1 NAME

OPT

1	NAME
2	TEXT

2 TEXT  
3 CONTENT

```
\systemlog {...} {...} {...}
```

1 FILE

1 FILE  
2 TEXT

3 TEXT

<code>\systemlogfirst {...} {...} {...}</code> 1 FILE 2 TEXT 3 TEXT
<code>\systemloglast {...} {...} {...}</code> 1 FILE 2 TEXT 3 TEXT
<code>\systemsetups {...}</code> * NAME
<code>\TABLE</code>
<code>\TaBlE</code>
<code>\TEX</code>
<code>\TeX</code>
<code>\TheNormalizedFontSize</code>
<code>\TransparencyHack</code>
<code>\tabulateautoline</code>
<code>\tabulateautorule</code>
<code>\tabulateline</code>
<code>\tabulaterule</code>
<code>\taggedctxcommand {...}</code> * BEFEHL
<code>\taggedlabeltexts {...} {...} {...}</code> 1 NAME 2 NAME 3 CONTENT
<code>\tbox {...}</code> * CONTENT
<code>\testandsplitstring ... \at ... \to ... \and ...</code> 1 TEXT 2 TEXT 3 CSNAME 4 CSNAME
<code>\testcolumn [...] [...]</code> 1 NUMBER OPT 2 DIMENSION
<code>\testfeature {...} {...}</code> 1 NUMBER 2 CONTENT

<pre> \testfeatureonce {...} {...} 1  NUMBER 2  CONTENT </pre>
<pre> \testpage [...] [...] 1  NUMBER          OPT 2  DIMENSION </pre>
<pre> \testpageonly [...] [...] 1  NUMBER          OPT 2  DIMENSION </pre>
<pre> \testpagesync [...] [...] 1  NUMBER          OPT 2  DIMENSION </pre>
<pre> \testtokens [...] *  NAME </pre>
<pre> \tex {...} *  CONTENT </pre>
<pre> \texdefinition {...} *  NAME </pre>
<pre> \texsetup {...} *  NAME </pre>
<pre> \textajutator [...] {...} {...} 1  REFERENCE      OPT 2  TEXT 3  TEXT </pre>
<pre> \TEXTBACKGROUND {...} *  CONTENT </pre>
<pre> \textcitation [...,...<sup>1</sup>...,...] [...] 1  referinta  = REFERENCE     alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum                     authorityyear     inainte   = BEFEHL     dupa      = BEFEHL     stanga    = BEFEHL     dreapta   = BEFEHL     inherits: \setupbtx 2  REFERENCE </pre>
<pre> \textcitation [...<sup>1</sup>] [...<sup>2</sup>] 1  implicit category<sup>OPT</sup>entry short pagina num textnum an index tag keywords autor authoryears authornum authorityyear 2  REFERENCE </pre>
<pre> \textcitation [...,...<sup>1</sup>...,...] [...,...<sup>2</sup>...,...] 1  referinta  = REFERENCE     alternativ = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum                     authorityyear     inainte   = BEFEHL     dupa      = BEFEHL     stanga    = BEFEHL     dreapta   = BEFEHL     inherits: \setupbtx 2  KEY  = VALUE </pre>

```

\textcite [...1...2...] [...]
1  referinta    = REFERENCE
   alternativ    = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
                  authoryear
   inainte      = BEFEHL
   dupa         = BEFEHL
   stanga       = BEFEHL
   dreapta     = BEFEHL
   inherits:    \setupbtx
2  REFERENCE

```

```

\textcite [...1...] [...]
1  implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum authoryear
2  REFERENCE

```

```

\textcite [...1...2...] [...]
1  referinta    = REFERENCE
   alternativ    = implicit category entry short pagina num textnum an index tag keywords autor authoryears authornum
                  authoryear
   inainte      = BEFEHL
   dupa         = BEFEHL
   stanga       = BEFEHL
   dreapta     = BEFEHL
   inherits:    \setupbtx
2  KEY = VALUE

```

```

\textcontrolsplace

```

```

\LABELtext {...}
*  KEY
instances: head label mathlabel taglabel unit operator prefix suffix btxlabel

```

```

\btxlabeltext {...}
*  KEY

```

```

\headtext {...}
*  KEY

```

```

\labeltext {...}
*  KEY

```

```

\mathlabeltext {...}
*  KEY

```

```

\operatortext {...}
*  KEY

```

```

\prefixtext {...}
*  KEY

```

```

\suffixtext {...}
*  KEY

```

```

\taglabeltext {...}
*  KEY

```

```

\unittext {...}
*  KEY

```

```

\textflowcollector {...}
*  NAME

```

$\backslash$ FRAMEDTEXT [... <sup>1</sup> ... <sup>2</sup> ] {...} 1 inherits: \setupframedtext 2 CONTENT instances: framedtext
$\backslash$ framedtext [... <sup>1</sup> ... <sup>2</sup> ] {...} 1 inherits: \setupframedtext 2 CONTENT
$\backslash$ textmath {...} * CONTENT
$\backslash$ textminus
$\backslash$ textormathchar {...} * NUMMER
$\backslash$ textormathchars {...} * CHARACTER
$\backslash$ textplus
$\backslash$ textumplere [... <sup>1</sup> ... <sup>2</sup> ] <sup>3</sup> {...} {...} 1 inherits: \setezarigtextumplere OPT OPT 2 TEXT 3 TEXT
$\backslash$ textvisiblespace
$\backslash$ thainumerals {...} * NUMMER
$\backslash$ thefirstcharacter {...} * TEXT
$\backslash$ thenormalizedbodyfontsize {...} * DIMENSION
$\backslash$ theremainingcharacters {...} * TEXT
$\backslash$ thickspace
$\backslash$ thinspace
$\backslash$ thirdoffivearguments {... <sup>1</sup> } {... <sup>2</sup> } {... <sup>3</sup> } {... <sup>4</sup> } {... <sup>5</sup> } 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT
$\backslash$ thirdoffourarguments {... <sup>1</sup> } {... <sup>2</sup> } {... <sup>3</sup> } {... <sup>4</sup> } 1 TEXT 2 TEXT 3 TEXT 4 TEXT

<p><code>\thirdofsixarguments {...} {...} {...} {...} {...} {...}</code></p> <p>1 TEXT</p> <p>2 TEXT</p> <p>3 TEXT</p> <p>4 TEXT</p> <p>5 TEXT</p> <p>6 TEXT</p>
<p><code>\thirdofthreearguments {...} {...} {...}</code></p> <p>1 TEXT</p> <p>2 TEXT</p> <p>3 TEXT</p>
<p><code>\thirdofthreeunexpanded {...} {...} {...}</code></p> <p>1 TEXT</p> <p>2 TEXT</p> <p>3 TEXT</p>
<p><code>\threedigitrounding {...}</code></p> <p>* NUMBER</p>
<p><code>\tibetannumerals {...}</code></p> <p>* NUMBER</p>
<p><code>\tightlayer [...]</code></p> <p>* NAME</p>
<p><code>\tilde {...}</code></p> <p>* CHARACTER</p>
<p><code>\tinyfont</code></p>
<p><code>\tlap {...}</code></p> <p>* CONTENT</p>
<p><code>\tochar {...}</code></p> <p>* e:NAME x:NUMBER d:NUMBER s:NUMBER i:NUMBER n:NAME c:NAME u:NAME a:NAME</p>
<p><code>\tolinenote [...]</code></p> <p>* REFERENCE</p>
<p><code>\TOOLTIP [...<sup>1</sup>...<sup>2</sup>...] {...} {...}</code></p> <p>1 inherits: \setup<sup>OPT</sup>tooltip</p> <p>2 TEXT</p> <p>3 TEXT</p> <p>instances: tooltip</p>
<p><code>\TOOLTIP [...<sup>1</sup>] {...<sup>2</sup>} {...<sup>3</sup>}</code></p> <p>1 stanga cent<sup>OPT</sup>fu dreapta</p> <p>2 TEXT</p> <p>3 TEXT</p> <p>instances: tooltip</p>
<p><code>\tooltip [...<sup>1</sup>] {...<sup>2</sup>} {...<sup>3</sup>}</code></p> <p>1 stanga cent<sup>OPT</sup>fu dreapta</p> <p>2 TEXT</p> <p>3 TEXT</p>
<p><code>\tooltip [...<sup>1</sup>...<sup>2</sup>...] {...<sup>2</sup>} {...<sup>3</sup>}</code></p> <p>1 inherits: \setup<sup>OPT</sup>tooltip</p> <p>2 TEXT</p> <p>3 TEXT</p>



<code>\topbox {...}</code> *    CONTENT
<code>\topleftbox {...}</code> *    CONTENT
<code>\toplinebox {...}</code> *    CONTENT
<code>\toprightbox {...}</code> *    CONTENT
<code>\topskippedbox {...}</code> *    CONTENT
<code>\tracecatcodetables</code>
<code>\tracedfontname {...}</code> *    FONT
<code>\traceoutputroutines</code>
<code>\tracepositions</code>
<code>\traduce [...,*,...]</code> *    SPRACHE = TEXT <sup>PT</sup>
<code>\transparencycomponents {...}</code> *    COLOR
<code>\transparent [<sup>1</sup>...] {<sup>2</sup>...}</code> 1    COLOR 2    CONTENT
<code>\trecilafonttext [...,*,...]</code> *    inherits: \seteazafonttext
<code>\triplebond</code>
<code>\truefilename {...}</code> *    FILE
<code>\truefontname {...}</code> *    FONT
<code>\ttraggedright</code>
<code>\twodigitrounding {...}</code> *    NUMMER
<code>\tx</code>
<code>\txx</code>

$\backslash\text{typ} [\dots\overset{1}{=}\dots] \{\overset{2}{\dots}\}$ 1 inherits: $\overset{\text{OPT}}{\backslash\text{seteazatype}}$ 2 CONTENT
$\backslash\text{type} [\dots\overset{1}{=}\dots] \{\overset{2}{\dots}\}$ 1 inherits: $\overset{\text{OPT}}{\backslash\text{seteazatype}}$ 2 CONTENT
$\backslash\text{typedefinedbuffer} [\overset{1}{\dots}] [\dots\overset{2}{=}\dots]$ 1 BUFFER 2 inherits: $\backslash\text{seteazatyping}$
$\backslash\text{typeface}$
$\backslash\text{typefile} [\overset{1}{\dots}] [\dots\overset{2}{=}\dots] \{\overset{3}{\dots}\}$ 1 NAME OPT 2 inherits: $\backslash\text{seteazatyping}$ 3 FILE
$\backslash\text{typeinlinebuffer} [\dots\overset{1}{\dots}] [\dots\overset{2}{=}\dots]$ 1 BUFFER OPT 2 inherits: $\backslash\text{seteazatype}$
$\backslash\text{typescriptone}$
$\backslash\text{typescriptprefix} \{*\dots\}$ * NAME
$\backslash\text{typescriptthree}$
$\backslash\text{typescripttwo}$
$\backslash\text{typesetbuffer} [\overset{1}{\dots}] [\dots\overset{2}{=}\dots]$ 1 * BUFFER OPT 2 inherits: $\backslash\text{setupexternalfigure}$
$\backslash\text{typesetfile} [\overset{1}{\dots}] [\overset{2}{\dots}] [\dots\overset{3}{=}\dots]$ 1 NAME FILE OPT 2 FILE TEXT 3 inherits: $\backslash\text{setupexternalfigure}$
$\backslash\text{type} [\dots\overset{1}{=}\dots] <<\overset{2}{\dots}>>$ 1 inherits: $\overset{\text{OPT}}{\backslash\text{seteazatype}}$ 2 ANGLES
$\backslash\text{TYPE} [\dots\overset{1}{=}\dots] \{\overset{2}{\dots}\}$ 1 inherits: $\overset{\text{OPT}}{\backslash\text{seteazatype}}$ 2 CONTENT
$\backslash\text{TYPE} [\dots\overset{1}{=}\dots] <<\overset{2}{\dots}>>$ 1 inherits: $\overset{\text{OPT}}{\backslash\text{seteazatype}}$ 2 ANGLES
$\backslash\text{typ} [\dots\overset{1}{=}\dots] <<\overset{2}{\dots}>>$ 1 inherits: $\overset{\text{OPT}}{\backslash\text{seteazatype}}$ 2 ANGLES
$\backslash\text{uconvertnumber} \{\overset{1}{\dots}\} \{\overset{2}{\dots}\}$ 1 inherits: $\backslash\text{converttestenumar}$ 2 NUMMER

<code>\uedcatcodecommand \<sup>1</sup>... <sup>2</sup>... {<sup>3</sup>...}</code> 1 CSNAME 2 CHARACTER NUMBER 3 BEFEHL
<code>\ultimasubpagina</code>
<code>\undefinevalue {<sup>*</sup>...}</code> <sup>*</sup> NAME
<code>\undepthed {<sup>*</sup>...}</code> <sup>*</sup> CONTENT
<code>\underset {<sup>1</sup>...} {<sup>2</sup>...}</code> 1 TEXT 2 TEXT
<code>\undeva {<sup>1</sup>...} {<sup>2</sup>...} [<sup>3</sup>...]</code> 1 TEXT 2 TEXT 3 REFERENCE
<code>\undoassign [<sup>1</sup>...] [<sup>2</sup>...]</code> 1 TEXT 2 KEY = VALUE
<code>\unexpandeddocumentvariable {<sup>*</sup>...}</code> <sup>*</sup> KEY
<code>\unhhbox <sup>1</sup>... \with {<sup>2</sup>...}</code> 1 CSNAME NUMBER 2 BEFEHL
<code>\unihex {<sup>*</sup>...}</code> <sup>*</sup> NUMMER
<code>\uniqueMPgraphic {<sup>1</sup>...} {<sup>2</sup>...,...<sup>2</sup>...,...}</code> 1 NAME 2 KEY = VALUE
<code>\uniqueMPpagegraphic {<sup>1</sup>...} {<sup>2</sup>...,...<sup>2</sup>...,...}</code> 1 NAME 2 KEY = VALUE
<code>\UNIT {<sup>*</sup>...}</code> <sup>*</sup> CONTENT instances: unit
<code>\unit {<sup>*</sup>...}</code> <sup>*</sup> CONTENT
<code>\unprotect ... \protect</code>
<code>\unprotected <sup>*</sup>... \par</code> <sup>*</sup> CONTENT
<code>\unregisterhyphenationpattern [<sup>1</sup>...] [<sup>2</sup>...]</code> 1 SPRACHE 2 TEXT

<code>\unspaceafter \<sup>1</sup> \<sup>2</sup></code> 1 CSNAME 2 TEXT
<code>\unspaceargument \<sup>1</sup> \to \<sup>2</sup></code> 1 TEXT 2 CSNAME
<code>\unspaced {...}</code> * TEXT
<code>\unspacestring \<sup>1</sup> \to \<sup>2</sup></code> 1 TEXT 2 CSNAME
<code>\untexargument {...} \to \<sup>2</sup></code> 1 TEXT 2 CSNAME
<code>\untexcommand {...} \to \<sup>2</sup></code> 1 CSNAME 2 CSNAME
<code>\uppercased {...}</code> * TEXT
<code>\uppercasestring \<sup>1</sup> \to \<sup>2</sup></code> 1 TEXT 2 CSNAME
<code>\upperlefthdoubleninequote</code>
<code>\upperlefthdoublesixquote</code>
<code>\upperleftsingleninequote</code>
<code>\upperleftsinglesixquote</code>
<code>\upperrightdoubleninequote</code>
<code>\upperrightdoublesixquote</code>
<code>\upperrightsingleninequote</code>
<code>\upperrightsinglesixquote</code>
<code>\url [...]</code> * NAME
<code>\urmatoareasubpagina</code>
<code>\usealignparameter \<sup>*</sup></code> * CSNAME
<code>\useblankparameter \<sup>*</sup></code> * CSNAME

<pre> \usebodyfont [...] * inherits: \seteazafonttext </pre>
<pre> \usebodyfontparameter \*. * CSNAME </pre>
<pre> \usebtxdataset [...] [...] [...] [...] 1 NAME OPT OPT 2 FILE 3 specification = NAME </pre>
<pre> \usebtxdefinitions [...] * FILE </pre>
<pre> \usecitation [...] * REFERENCE </pre>
<pre> \usecitation {...} * REFERENCE </pre>
<pre> \usecolors [...] * FILE </pre>
<pre> \usecomponent [...] * FILE </pre>
<pre> \usedummycolorparameter {...} * KEY </pre>
<pre> \usedummystyleandcolor {...} {...} 1 KEY 2 KEY </pre>
<pre> \usedummystyleparameter {...} * KEY </pre>
<pre> \useenvironment [...] * FILE </pre>
<pre> \useexternalrendering [...] [...] [...] [...] 1 NAME 2 NAME 3 FILE 4 auto embed </pre>
<pre> \usefigurebase [...] * reset FILE </pre>
<pre> \usefile [...] [...] [...] 1 NAME OPT 2 FILE 3 TEXT </pre>
<pre> \usegridparameter \*. * CSNAME </pre>
<pre> \useindentingparameter \*. * CSNAME </pre>

$\backslash$ useindentnextparameter $\backslash$ ... * CSNAME
$\backslash$ useinterlinespaceparameter $\backslash$ ... * CSNAME
$\backslash$ uselanguageparameter $\backslash$ ... * CSNAME
$\backslash$ uselua module [...] * FILE
$\backslash$ useMPenvironmentbuffer [...] * NAME
$\backslash$ useMPgraphic { <sup>1</sup> ...} { <sup>2</sup> ...,... <sub>OPT</sub> ,...} 1 NAME 2 KEY = VALUE
$\backslash$ useMPlibrary [...] * FILE
$\backslash$ useMPrun { <sup>1</sup> ...} { <sup>2</sup> ...} 1 NAME 2 NUMMER
$\backslash$ useMPvariables [ <sup>1</sup> ...] [ <sup>2</sup> ...,...] 1 NAME 2 KEY
$\backslash$ usemathstyleparameter $\backslash$ ... * CSNAME
$\backslash$ useproduct [...] * FILE
$\backslash$ useprofileparameter $\backslash$ ... * CSNAME
$\backslash$ useproject [...] * FILE
$\backslash$ userreferenceparameter $\backslash$ ... * CSNAME
$\backslash$ userpagenumber
$\backslash$ usesetupparameter $\backslash$ ... * CSNAME
$\backslash$ usestaticMPfigure [..., <sup>1</sup> ...,... <sub>OPT</sub> ] [ <sup>2</sup> ...] 1 inherits: \setupscale 2 NAME
$\backslash$ usesubpath [...*,...] * PATH

<pre> \usetexmodule [...] [...] [...] 1  m p s x t      OPT      OPT 2  FILE 3  KEY = VALUE </pre>
<pre> \usetypescript [...] [...] [...] 1  serif sans mono math handwriting calligraphy casual tot 2  NAME fallback implicit dtp simple 3  size nume </pre>
<pre> \usetypescriptfile [...] *   reset FILE </pre>
<pre> \usezipfile [...] [...] 1  FILE      OPT 2  FILE </pre>
<pre> \utfchar {...} *   NUMMER </pre>
<pre> \utflower {...} *   TEXT </pre>
<pre> \utfupper {...} *   TEXT </pre>
<pre> \utilityregisterlength </pre>
<pre> \VerboseNumber {...} *   NUMMER </pre>
<pre> \valoareculoare {...} *   COLOR </pre>
<pre> \ vboxreference [...] [...] [...] 1  REFERENCE 2  CONTENT </pre>
<pre> \vec {...} *   CHARACTER </pre>
<pre> \verbatim {...} *   CONTENT </pre>
<pre> \verbatimstring {...} *   CONTENT </pre>
<pre> \verbosenummer {...} *   NUMMER </pre>
<pre> \versiune [...] *   concept fisier temporar final NAME </pre>
<pre> \verticalgrowingbar [...] [...] *   inherits: \setuppositionbar </pre>
<pre> \verticalpositionbar [...] [...] *   inherits: \setuppositionbar </pre>

<code>\veryraggedcenter</code>
<code>\veryraggedleft</code>
<code>\veryraggedright</code>
<code>\vglue ...</code> <code>*    DIMENSION</code>
<code>\viewerlayer [...]{...}</code> <code>1    NAME</code> <code>2    CONTENT</code>
<code>\vl [...]</code> <code>*    NUMBER</code>
<code>\vphantom {...}</code> <code>*    CONTENT</code>
<code>\vpos {...}{...}</code> <code>1    NAME</code> <code>2    CONTENT</code>
<code>\vsmash {...}</code> <code>*    CONTENT</code>
<code>\vsmashbox ...</code> <code>*    CSNAME NUMBER</code>
<code>\vsmashed {...}</code> <code>*    CONTENT</code>
<code>\vspace [...]{...}</code> <code>1    NAME        OPT        OPT</code> <code>2    NAME</code>
<code>\vspacing [...]{...}</code> <code>*    preferinta acea<sup>OPT</sup>si pagina max fortat enable dezactivat faraalb impachetat inapot overlay totdeauna weak strong  implicit inainte intre dupa fixat flexibil niciunul mic mediu mare linie jumatatelinie quarterline formula alb  inaltime adancime standard NUMBER*mic NUMBER*mediu NUMBER*mare NUMBER*linie NUMBER*jumatatelinie NUMBER*quarterline  NUMBER*formula NUMBER*alb NUMBER*inaltime NUMBER*adancime category:NUMBER order:NUMBER penalty:NUMBER DIMENSION  NAME</code>
<code>\WidthSpanningText {...}{...}{...}</code> <code>1    TEXT</code> <code>2    DIMENSION</code> <code>3    FONT</code>
<code>\wdofstring {...}</code> <code>*    TEXT</code>
<code>\widthhofstring {...}</code> <code>*    TEXT</code>
<code>\widthspanningtext {...}{...}{...}</code> <code>1    TEXT</code> <code>2    DIMENSION</code> <code>3    FONT</code>



```
\withoutpt {...}
```

\* DIMENSION

```
\words {...}
```

\* TEXT

$$\backslash\mathrm{wordtonumber}\ \{.\!.\!.\}^1\ \{.\!.\!.\}^2$$

1    unu doi trei patru cinci

2 TEXT

```
\writedatatolist [...] [.,..2.,..] [.,..3.,..]
```

1 LISTE

```
2 inherits: \seteazalista
```

3 KEY = VALUE

`\writestatus {...} {...}`

1 TEXT

```
1  TEXT
2  TEXT
```

\XETEX

\XeTeX

$$\backslash xdef convertedargument \ldots \{ \ldots \}$$

1 CSNAME

2 TEXT

```
\xmladdindex {...}
```

\* NODE

$$\backslash\mathrm{xmlafterdocumentsetup}\{\dots\}\{\dots\}\{\dots\}$$

1 NAME

1	NAME
2	SETUP

3 SETUP

$$\backslash\mathrm{xmlaftersetup}\{\dots\}\{\dots\}$$

## 1 SETUP

```

1  SETUP
2  SETUP

```

$$\backslash \mathrm{xmlall} \left\{ \dots \right\}^1 \left\{ \dots \right\}^2$$

1 NODE

```
1  NODE
2  LPATH
```

$$\backslash \mathrm{xmlappenddocumentsetup} \{ \dots \} \{ \dots \}$$

1 NAME

1	NAME
2	SETUP

```
\xmlappendsetup {...}
```

## \* SETUP

```
\xmlapplyselectors {...}
```

\* NODE

$$\backslash \mathrm{xmlatt} \{.^1.\} \{.^2.\}$$

1    NODE

1	NODE
2	NAME

<pre> \xmlattdef {...} {...} {...} 1  NODE 2  NAME 3  TEXT </pre>
<pre> \xmlattribute {...} {...} {...} 1  NODE 2  LPATH 3  NAME </pre>
<pre> \xmlattributedef {...} {...} {...} {...} 1  NODE 2  LPATH 3  NAME 4  TEXT </pre>
<pre> \xmlbadinclusions {...} *  NODE </pre>
<pre> \xmlbeforedocumentsetup {...} {...} {...} 1  NAME 2  SETUP 3  SETUP </pre>
<pre> \xmlbeforesetup {...} {...} 1  SETUP 2  SETUP </pre>
<pre> \xmlchainatt {...} {...} 1  NODE 2  NAME </pre>
<pre> \xmlchainattdef {...} {...} {...} 1  NODE 2  NAME 3  TEXT </pre>
<pre> \xmlchecknamespace {...} {...} 1  NODE 2  NAME </pre>
<pre> \xmlcommand {...} {...} {...} 1  NODE 2  LPATH 3  XMLSETUP </pre>
<pre> \xmlconcat {...} {...} {...} 1  NODE 2  LPATH 3  TEXT </pre>
<pre> \xmlconcatrange {...} {...} {...} {...} {...} 1  NODE 2  LPATH 3  TEXT 4  FIRST 5  LAST </pre>
<pre> \xmlcontext {...} {...} 1  NODE 2  LPATH </pre>
<pre> \xmlcount {...} *  NODE </pre>

\xmldefaulttotext {...} *    NODE
\xmldirectives {...} *    NODE
\xmldirectivesafter {...} *    NODE
\xmldirectivesbefore {...} *    NODE
\xmldisplayverbatim {...} *    NODE
\xmldoif {...} {...} {...} 1    NODE 2    LPATH 3    TRUE
\xmldoifatt {...} {...} 1    NODE 2    TRUE
\xmldoifelse {...} {...} {...} {...} 1    NODE 2    LPATH 3    TRUE 4    FALSE
\xmldoifelseatt {...} {...} {...} 1    NODE 2    TRUE 3    FALSE
\xmldoifelseempty {...} {...} {...} {...} 1    NODE 2    LPATH 3    TRUE 4    FALSE
\xmldoifelseselfempty {...} {...} {...} 1    NODE 2    TRUE 3    FALSE
\xmldoifelsetext {...} {...} {...} {...} 1    NODE 2    LPATH 3    TRUE 4    FALSE
\xmldoifelsevalue {...} {...} {...} {...} 1    CATEGORY 2    NAME 3    TRUE 4    FALSE
\xmldoifnot {...} {...} {...} 1    NODE 2    LPATH 3    TRUE

\xmldoifnotatt {...} {...} 1    NODE 2    TRUE
\xmldoifnotselfempty {...} {...} 1    NODE 2    TRUE
\xmldoifnottext {...} {...} {...} 1    NODE 2    LPATH 3    TRUE
\xmldoifselfempty {...} {...} 1    NODE 2    TRUE
\xmldoiftext {...} {...} {...} 1    NODE 2    LPATH 3    TRUE
\xmlelement {...} {...} 1    NODE 2    NUMMER
\xmlfilter {...} {...} 1    NODE 2    LPATH
\xmlfirst {...} {...} 1    NODE 2    LPATH
\xmlflush {...} *    NODE
\xmlflushcontext {...} *    NODE
\xmlflushdocumentsetups {...} {...} 1    NAME 2    SETUP
\xmlflushlinewise {...} *    NODE
\xmlflushpure {...} *    NODE
\xmlflushspacewise {...} *    NODE
\xmlflushtext {...} *    NODE
\xmlinclude {...} {...} {...} 1    NODE 2    LPATH 3    NAME

<code>\xmlinclusion {...}</code> *    NODE
<code>\xmlinclusions {...}</code> *    NODE
<code>\xmlinfo {...}</code> *    NODE
<code>\xmlinjector {...}</code> *    NAME
<code>\xmllineprettyprint {...} {...}</code> 1    NODE 2    mp lua xml parsed-xml nested tex context niciunul NAME
<code>\xmllineprettyprinttext {...} {...}</code> 1    NODE 2    mp lua xml parsed-xml nested tex context niciunul NAME
<code>\xmllineverbatim {...}</code> *    NODE
<code>\xmlinstalldirective {...} {...}</code> 1    NAME 2    CSNAME
<code>\xmllast {...} {...}</code> 1    NODE 2    LPATH
<code>\xmllastatt</code>
<code>\xmllastmatch</code>
<code>\xmllastpar</code>
<code>\xmlloadbuffer {...} {...} {...}</code> 1    BUFFER 2    NAME 3    XMLSETUP
<code>\xmlloaddata {...} {...} {...}</code> 1    NAME 2    TEXT 3    XMLSETUP
<code>\xmlloaddirectives {...}</code> *    FILE
<code>\xmlloadfile {...} {...} {...}</code> 1    NAME 2    FILE 3    XMLSETUP
<code>\xmlloadonly {...} {...} {...}</code> 1    NAME 2    FILE 3    XMLSETUP

<pre> \xmlmain {...} *   NAME </pre>
<pre> \xmlmapvalue {...} {...} {...} 1   CATEGORY 2   NAME 3   TEXT </pre>
<pre> \xmlname {...} *   NODE </pre>
<pre> \xmlnamespace {...} *   NODE </pre>
<pre> \xmlnonspace {...} {...} 1   NODE 2   LPATH </pre>
<pre> \xmlpar {...} {...} 1   NODE 2   NAME </pre>
<pre> \xmlparam {...} {...} {...} 1   NODE 2   LPATH 3   NAME </pre>
<pre> \xmlpath {...} *   NODE </pre>
<pre> \xmlpos {...} *   NODE </pre>
<pre> \xmlposition {...} {...} {...} 1   NODE 2   LPATH 3   NUMMER </pre>
<pre> \xmlprependdocumentsetup {...} {...} 1   NAME 2   SETUP </pre>
<pre> \xmlprependsetup {...} *   SETUP </pre>
<pre> \xmlprettyprint {...} {...} 1   NODE 2   mp lua xml parsed-xml nested tex context niciunul NAME </pre>
<pre> \xmlprettyprinttext {...} {...} 1   NODE 2   mp lua xml parsed-xml nested tex context niciunul NAME </pre>
<pre> \xmlprocessbuffer {...} {...} {...} 1   BUFFER 2   NAME 3   XMLSETUP </pre>

\xmlprocessdata {...} {...} {...}

- 1 NAME
- 2 TEXT
- 3 XMLSETUP

\xmlprocessfile {...} {...} {...}

- 1 NAME
- 2 FILE
- 3 XMLSETUP

\xmlpure {...} {...}

- 1 NODE
- 2 LPATH

\xmlraw {...}

- \* NODE

\xmlrefatt {...} {...}

- 1 NODE
- 2 NAME

\xmlregistereddokumentsetups {...} {...}

- 1 NAME
- 2 SETUP

\xmlregisteredsetups

\xmlregisterns {...} {...}

- 1 NAME
- 2 URL

\xmlremapname {...} {...} {...} {...}

- 1 NODE
- 2 LPATH
- 3 NAME
- 4 NAME

\xmlremapnamespace {...} {...} {...}

- 1 NODE
- 2 NAME
- 3 NAME

\xmlremoveddocumentsetup {...} {...}

- 1 NAME
- 2 SETUP

\xmlremovesetup {...}

- \* SETUP

\xmlresetdocumentsetups {...}

- \* NAME

\xmlresetinjectors

\xmlresetsetups {...}

- \* NAME

\xmlsave {...} {...}

- 1 NODE
- 2 FILE

`\xmlsetatt {...} {...} {...}`

1 NODE  
2 NAME  
3 TEXT

`\xmlsetattribute {...} {...} {...} {...}`

1 NODE  
2 LPATH  
3 NAME  
4 TEXT

`\xmlsetentity {...} {...}`

1 NAME  
2 TEXT

`\xmlsetfunction {...} {...} {...}`

1 NODE  
2 LPATH  
3 LUAFUNCTION

`\xmlsetinjectors [...,*...]`

\* NAME

`\xmlsetpar {...} {...} {...}`

1 NODE  
2 NAME  
3 TEXT

`\xmlsetparam {...} {...} {...} {...}`

1 NODE  
2 LPATH  
3 NAME  
4 TEXT

`\xmlsetsetup {...} {...} {...}`

1 NAME  
2 LPATH  
3 SETUP

`\xmlsetup {...} {...}`

1 NODE  
2 SETUP

`\xmlshow {...}`

\* NODE

`\xmlsnippet {...} {...}`

1 NODE  
2 NUMMER

`\xmlstrip {...} {...}`

1 NODE  
2 LPATH

`\xmlstripnolines {...} {...}`

1 NODE  
2 LPATH

`\xmlstripped {...} {...}`


1 NODE  
2 LPATH



<code>\xmlstrippednolines {...} {...}</code> 1    NODE 2    LPATH
<code>\xmltag {...}</code> *    NODE
<code>\xmlexportentity {...} {...}</code> 1    NAME 2    TEXT
<code>\xmltext {...} {...}</code> 1    NODE 2    LPATH
<code>\xmltobuffer {...} {...} {...}</code> 1    NODE 2    LPATH 3    BUFFER
<code>\xmltobufferverbose {...} {...} {...}</code> 1    NODE 2    LPATH 3    BUFFER
<code>\xmltofile {...} {...} {...}</code> 1    NODE 2    LPATH 3    FILE
<code>\xmlvalue {...} {...} {...}</code> 1    CATEGORY 2    NAME 3    TEXT
<code>\xmlverbatim {...}</code> *    NODE
<code>\xsplitstring \... {...}</code> 1    CSNAME 2    TEXT
<code>\xypos {...}</code> *    NAME
<code>\ZIDINSAPTAMANA {...}</code> *    NUMMER
<code>\zidinsaptamana {...}</code> *    NUMMER





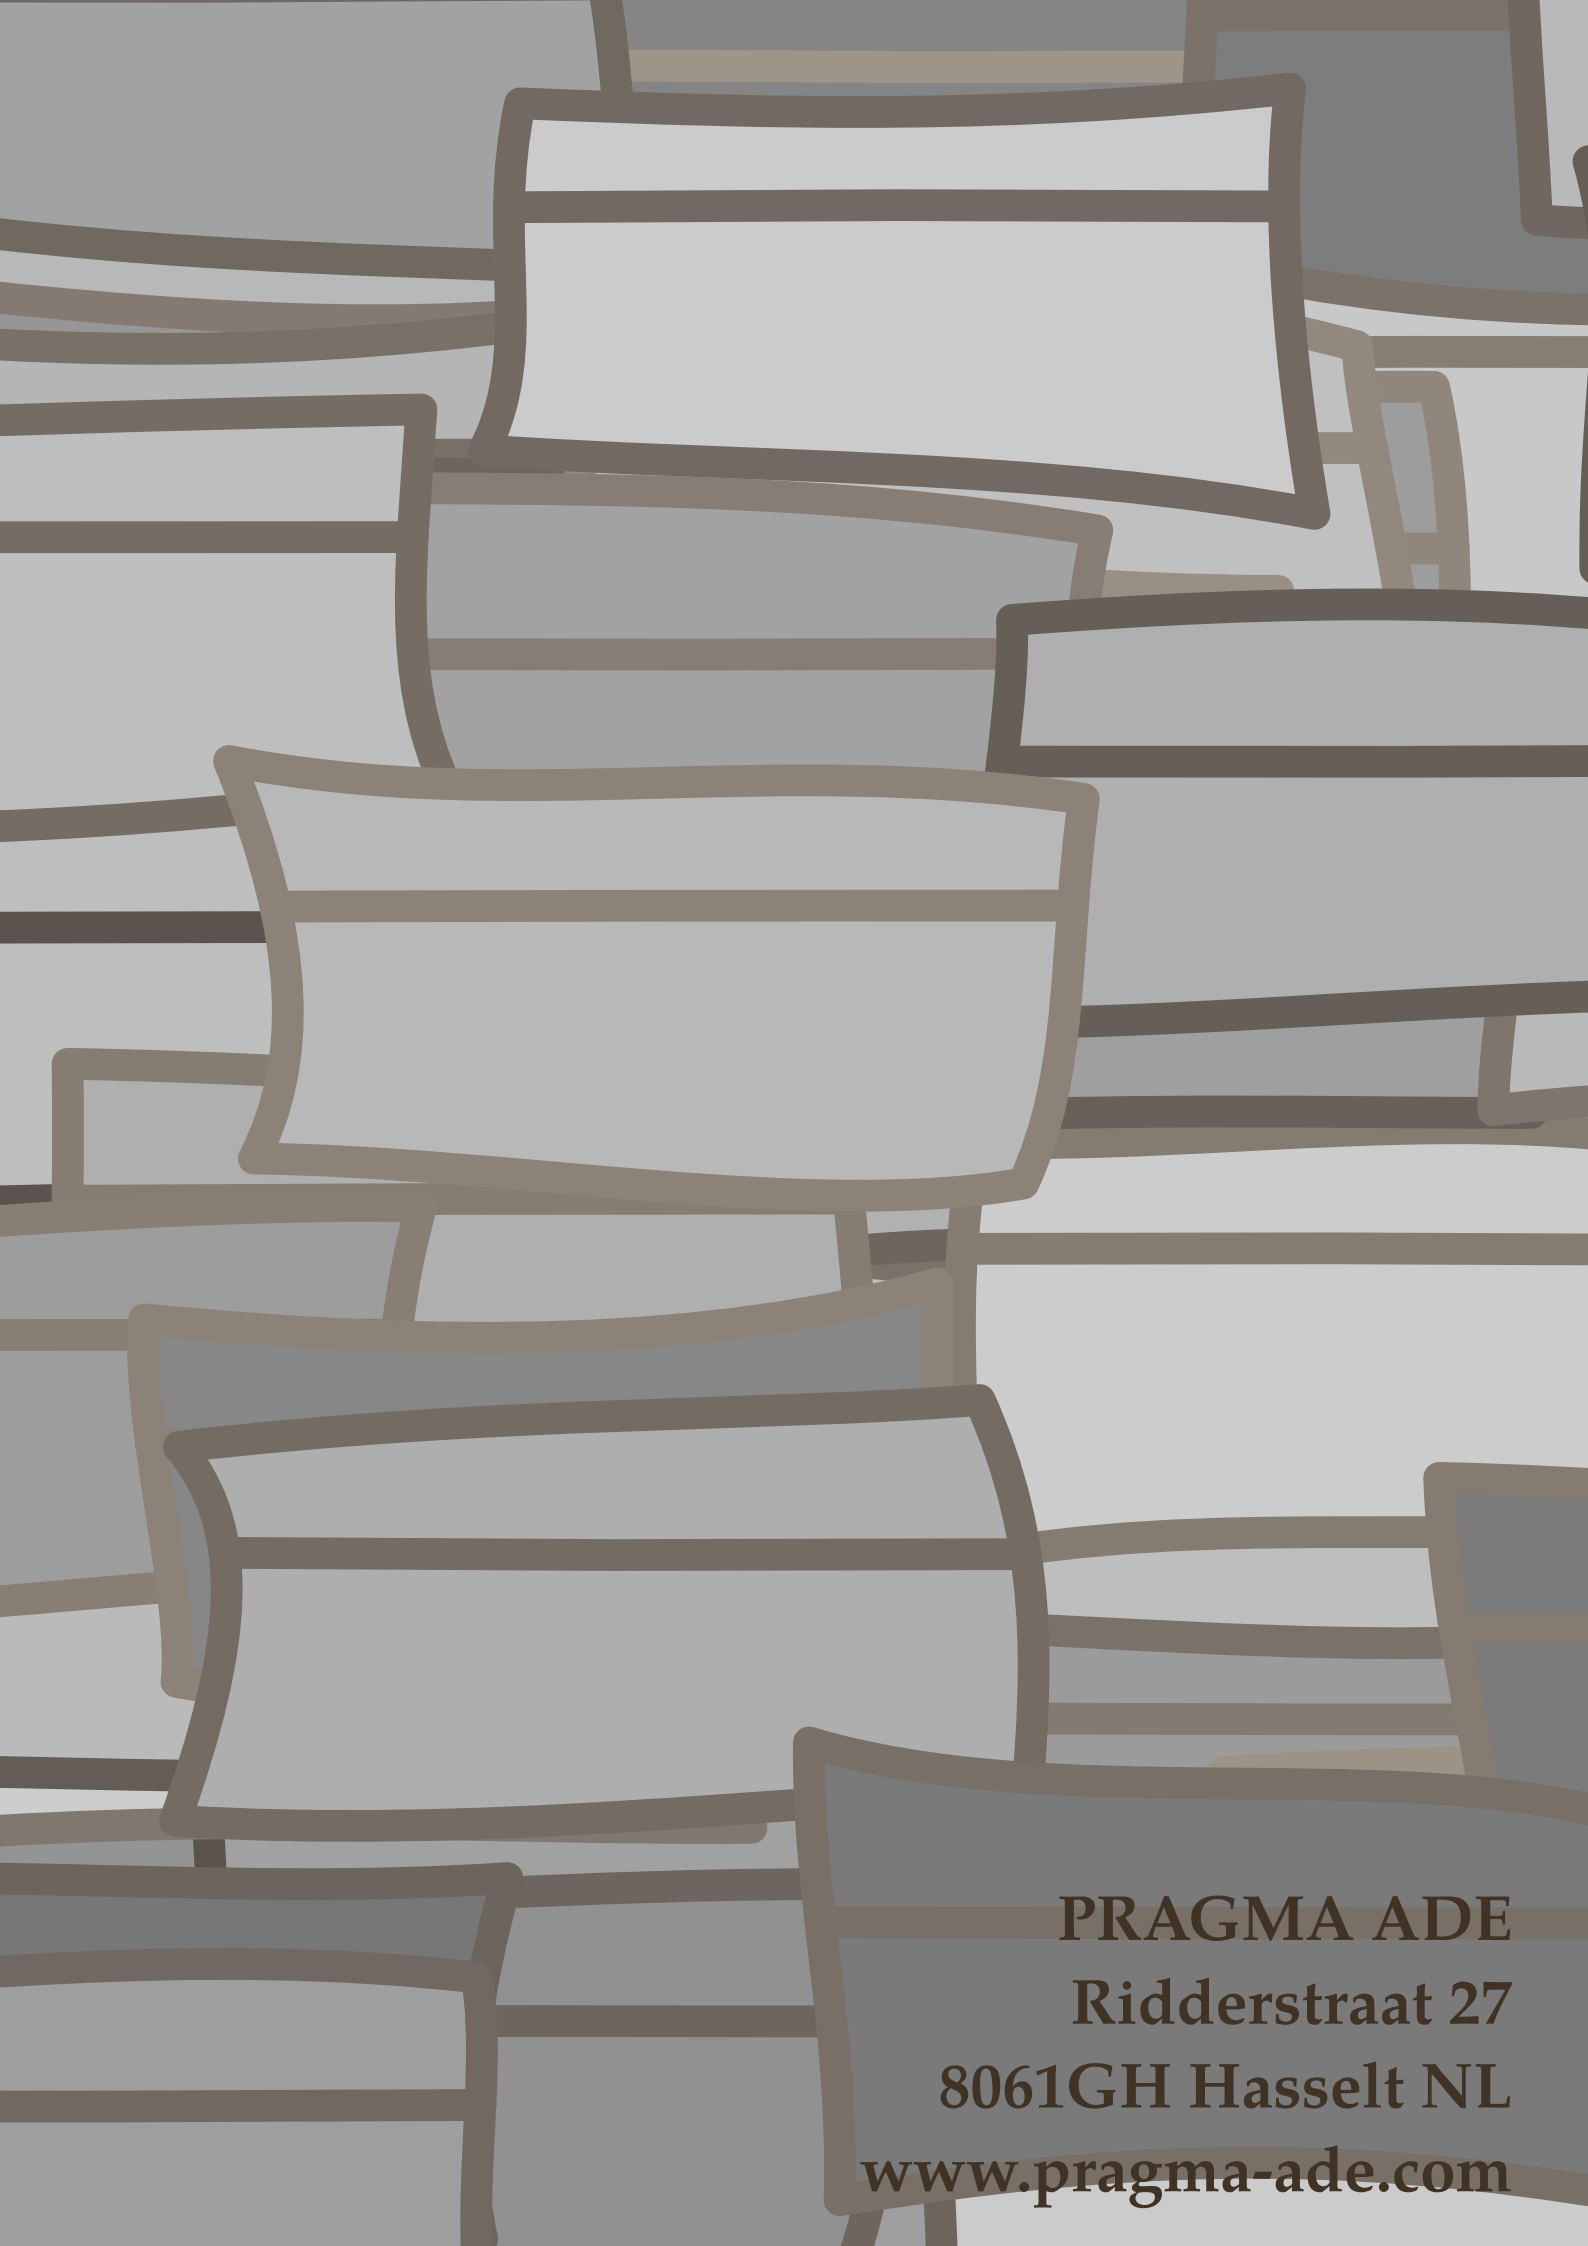

**PRAGMA ADE**  
**Ridderstraat 27**  
**8061GH Hasselt NL**  
**[www.pragma-ade.com](http://www.pragma-ade.com)**