

The background of the slide is composed of various overlapping, hand-drawn style shapes in shades of green and grey. These shapes include rectangles, rounded rectangles, and irregular polygons, some with thick green outlines and others with thinner lines. The overall effect is a layered, textured look.

# ConTeXt

commands

# EN



# ConTeXt

## commands

en / english

November 29, 2018



<code>\AfterPar {...}</code> *    COMMAND
<code>\Alphabeticnumerals {...}</code> *    NUMBER
<code>\AMSTEX</code>
<code>\AmSTeX</code>
<code>\And</code>
<code>\abjadnaivenumerals {...}</code> *    NUMBER
<code>\abjadnodotnumerals {...}</code> *    NUMBER
<code>\abjadnumerals {...}</code> *    NUMBER
<code>\about [...]</code> *    REFERENCE
<code>\activatespacehandler {...}</code> *    on <u>off</u> yes fixed
<code>\acute {...}</code> *    CHARACTER
<code>\adaptcollector [...]<sup>1</sup> [...,...<sup>2</sup>...,...]</code> 1    NAME <span style="float:right">OPT</span> 2    inherits: \setupcollector
<code>\adaptfontfeature [...]<sup>1</sup> [...,...<sup>2</sup>...,...]</code> 1    NAME 2    inherits: \definefontfeature
<code>\adaptlayout [...]<sup>1</sup>,...<sup>OPT</sup> [...,...<sup>2</sup>...,...]</code> 1    NUMBER 2    height = max DIMENSION lines = NUMBER
<code>\adaptpapersize [...]<sup>1</sup>,...<sup>OPT</sup> [...,...<sup>2</sup>...,...]</code> 1    inherits: \setuppapersize <span style="float:right">OPT</span> 2    inherits: \setuppapersize
<code>\addfeature [...]</code> *    NAME
<code>\addfeature {...}</code> *    NAME
<code>\addfontpath [...]*,...</code> *    PATH

<code>\addtocommalist {...} \^2.</code> 1 TEXT 2 CSNAME
<code>\addtoJSreamble {...} {...}</code> 1 NAME 2 CONTENT
<code>\addvalue {...} {...}</code> 1 NAME 2 TEXT
<code>\aftersplitstring ... \at ... \to \^3.</code> 1 TEXT 2 TEXT 3 CSNAME
<code>\aftertestandsplitstring ... \at ... \to \^3.</code> 1 TEXT 2 TEXT 3 CSNAME
<code>\alignbottom</code>
<code>\aligned [...,\^1...] {\^2.}</code> 1 left middle right top bottom line l c r m t b g 2 CONTENT
<code>\alignedbox [...,\^1...] \^2. {\^3.}</code> 1 left middle right top bottom line l c r m t b g 2 CSNAME 3 CONTENT
<code>\alignedline {\^1.} {\^2.} {\^3.}</code> 1 left right middle flushleft flushright center max inner outer innermargin outermargin inneredge outeredge backspace cutspace leftmargin rightmargin leftedge rightedge 2 left right middle flushleft flushright center max inner outer innermargin outermargin inneredge outeredge backspace cutspace leftmargin rightmargin leftedge rightedge 3 CONTENT
<code>\alignhere</code>
<code>\alignmentcharacter</code>
<code>\allinputpaths</code>
<code>\alphabeticnumerals {\^*}</code> * NUMBER
<code>\alwayscitation [...,\^1...,...] [\^2.]</code> 1 reference = REFERENCE <sup>P</sup> <sub>T</sub> alternative = default category entry short page num textnum year index tag keywords author authoryears authornum authoryear before = COMMAND after = COMMAND left = COMMAND right = COMMAND inherits: \setupbtx 2 REFERENCE
<code>\alwayscitation [\^1.] [\^2.]</code> 1 default category entry <sup>P</sup> <sub>T</sub> short page num textnum year index tag keywords author authoryears authornum authoryear 2 REFERENCE

`\alwayscitation [...1...2...]`

```
1 reference = REFERENCE
  alternative = default category entry short page num textnum year index tag keywords author authoryears authornum
    authoryear
  before = COMMAND
  after = COMMAND
  left = COMMAND
  right = COMMAND
  inherits: \setupbtx
2 KEY = VALUE
```

`\alwayscite [...1...2...]`

```
1 reference = REFERENCE
  alternative = default category entry short page num textnum year index tag keywords author authoryears authornum
    authoryear
  before = COMMAND
  after = COMMAND
  left = COMMAND
  right = COMMAND
  inherits: \setupbtx
2 REFERENCE
```

`\alwayscite [...1...]`

```
1 default category entry short page num textnum year index tag keywords author authoryears authornum authoryear
2 REFERENCE
```

`\alwayscite [...1...2...]`

```
1 reference = REFERENCE
  alternative = default category entry short page num textnum year index tag keywords author authoryears authornum
    authoryear
  before = COMMAND
  after = COMMAND
  left = COMMAND
  right = COMMAND
  inherits: \setupbtx
2 KEY = VALUE
```

`\ampersand`

`\anchor [...1...2...3...]{...4...}`

```
1 NAME OPT OPT
2 inherits: \setuplayer
3 inherits: \setuplayerinherits: \setupframed
4 CONTENT
```

`\appendetoks ... \to ...`

```
1 COMMAND
2 CSNAME
```

`\appendgvalue {...1...}{...2...}`

```
1 NAME
2 COMMAND
```

`\appendtocommalist {...1...} ...2...`

```
1 TEXT
2 CSNAME
```

`\appendtoks ... \to ...`

```
1 COMMAND
2 CSNAME
```

`\appendtoksonce ... \to ...`

```
1 COMMAND
2 CSNAME
```

<code>\appendvalue {...} {...}</code> 1 NAME 2 COMMAND
<code>\apply {...} {...}</code> 1 CONTENT 2 CONTENT
<code>\applyalternativestyle {...}</code> * NAME
<code>\applyprocessor {...} {...}</code> 1 NAME 2 CONTENT
<code>\applytocharacters \<sup>1</sup>... {<sup>2</sup>...}</code> 1 CSNAME 2 TEXT
<code>\applytofirstcharacter \<sup>1</sup>... {<sup>2</sup>...}</code> 1 CSNAME 2 TEXT
<code>\applytosplitstringchar \<sup>1</sup>... {<sup>2</sup>...}</code> 1 CSNAME 2 TEXT
<code>\applytosplitstringcharspaced \<sup>1</sup>... {<sup>2</sup>...}</code> 1 CSNAME 2 TEXT
<code>\applytosplitstringline \<sup>1</sup>... {<sup>2</sup>...}</code> 1 CSNAME 2 TEXT
<code>\applytosplitstringlinespaced \<sup>1</sup>... {<sup>2</sup>...}</code> 1 CSNAME 2 TEXT
<code>\applytosplitstringword \<sup>1</sup>... {<sup>2</sup>...}</code> 1 CSNAME 2 TEXT
<code>\applytosplitstringwordspaced \<sup>1</sup>... {<sup>2</sup>...}</code> 1 CSNAME 2 TEXT
<code>\applytowords \<sup>1</sup>... {<sup>2</sup>...}</code> 1 CSNAME 2 TEXT
<code>\arabicdecimals {...}</code> * NUMBER
<code>\arabicexnumerals {...}</code> * NUMBER
<code>\arabicnumerals {...}</code> * NUMBER



<code>\arg {...}</code> *    CONTENT
<code>\asciistr {...}</code> *    CONTENT
<code>\assignalfadimension {...} \^2... {...} {...} {...}</code> 1    small medium big none DIMENSION 2    CSNAME 3    DIMENSION 4    DIMENSION 5    DIMENSION
<code>\assigndimen \^1... {...}</code> 1    CSNAME 2    DIMENSION
<code>\assigndimension {...} \^2... {...} {...} {...}</code> 1    [-+]small [-+]medium [-+]big none DIMENSION 2    CSNAME 3    DIMENSION 4    DIMENSION 5    DIMENSION
<code>\assignifempty \^1... \^2...</code> 1    CSNAME 2    COMMAND
<code>\assigntranslation [...,\^1...,\^2... \to \^2...</code> 1    LANGUAGE = TEXT 2    CSNAME
<code>\assignvalue {...} \^2... {...} {...} {...}</code> 1    small medium big TEXT 2    CSNAME 3    COMMAND 4    COMMAND 5    COMMAND
<code>\assignwidth {...} \^2... {...} {...}</code> 1    fit broad DIMENSION 2    CSNAME 3    TEXT 4    DIMENSION
<code>\assumelongusagecs \^1... {...}</code> 1    CSNAME 2    CONTENT
<code>\astype {...}</code> *    CONTENT
<code>\at {...} {...} [...]</code> 1    TEXT <sup>OPT</sup> OPT 2    TEXT 3    REFERENCE
<code>\atpage [...]</code> *    REFERENCE
<code>\ATTACHMENT [...]\^1... \^2...,\^2...,\^2...]</code> 1    NAME    OPT    OPT 2    inherits: \setupattachment instances: attachment

$\backslash attachment$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <u>...</u> ...] 1 NAME OPT OPT 2 inherits: \setupattachment
$\backslash autocap$ {...} * TEXT
$\backslash autodirhbox$ [ <sup>1</sup> ...] {...} <sup>2</sup> 1 TEXT OPT 2 CONTENT
$\backslash autodirvbox$ [ <sup>1</sup> ...] {...} <sup>2</sup> 1 TEXT OPT 2 CONTENT
$\backslash autodirvtop$ [ <sup>1</sup> ...] {...} <sup>2</sup> 1 TEXT OPT 2 CONTENT
$\backslash autoinsertnextspace$
$\backslash autointegral$ {...} <sup>1</sup> {...} <sup>2</sup> {...} <sup>3</sup> 1 TEXT 2 TEXT 3 TEXT
$\backslash automathematics$ {...} * CONTENT
$\backslash autopagestaterealpage$ {...} * NAME
$\backslash autopagestaterealpageorder$ {...} * NAME
$\backslash autosetups$ {...,*...} * NAME
$\backslash autostarttext$ ... $\backslash autostoptext$
$\backslash availablehsize$
$\backslash averagecharwidth$
$\backslash BeforePar$ {...} * COMMAND
$\backslash Big$ ... * CHARACTER
$\backslash Bigg$ ... * CHARACTER
$\backslash Biggl$ ... * CHARACTER
$\backslash Biggm$ ... * CHARACTER

$\backslash\text{Biggr} \dots$ * CHARACTER
$\backslash\text{Bigl} \dots$ * CHARACTER
$\backslash\text{Bigm} \dots$ * CHARACTER
$\backslash\text{Bigr} \dots$ * CHARACTER
$\backslash\text{background} \{...\}$ * CONTENT
$\backslash\text{backgroundimage} \{.^1.\} \{.^2.\} \{.^3.\} \{.^4.\}$ 1 NUMBER 2 DIMENSION 3 DIMENSION 4 COMMAND
$\backslash\text{backgroundimagefill} \{.^1.\} \{.^2.\} \{.^3.\} \{.^4.\}$ 1 NUMBER 2 DIMENSION 3 DIMENSION 4 COMMAND
$\backslash\text{backgroundline} [.^1.] \{.^2.\}$ 1 COLOR 2 CONTENT
$\backslash\text{BACKGROUND} \{...\}$ * CONTENT instances: background
$\backslash\text{bar} \{...\}$ * CHARACTER
$\backslash\text{BAR} \{...\}$ * CONTENT instances: overbar underbar overstrike understrike overbars underbars overstrikes understrikes underrandom underrandoms underdash underdashes underdot underdots nobar hiddenbar
$\backslash\text{hiddenbar} \{...\}$ * CONTENT
$\backslash\text{nobar} \{...\}$ * CONTENT
$\backslash\text{overbar} \{...\}$ * CONTENT
$\backslash\text{overbars} \{...\}$ * CONTENT
$\backslash\text{overstrike} \{...\}$ * CONTENT

<code>\overstrikes {...}</code> *    CONTENT
<code>\underbar {...}</code> *    CONTENT
<code>\underbars {...}</code> *    CONTENT
<code>\underdash {...}</code> *    CONTENT
<code>\underdashes {...}</code> *    CONTENT
<code>\underdot {...}</code> *    CONTENT
<code>\underdots {...}</code> *    CONTENT
<code>\underrandom {...}</code> *    CONTENT
<code>\underrandoms {...}</code> *    CONTENT
<code>\understrike {...}</code> *    CONTENT
<code>\understrikes {...}</code> *    CONTENT
<code>\basegrid [...,...*=...]</code> *    nx            = <sup>OP</sup> NUMBER ny                = NUMBER dx                = NUMBER dy                = NUMBER factor            = NUMBER scale             = NUMBER xstep             = NUMBER ystep             = NUMBER offset            = DIMENSION xoffset           = DIMENSION yoffset           = DIMENSION align             = middle unit              = <u>cm</u> mm in pc pt bp style             = STYLE COMMAND color             = COLOR rulecolor         = COLOR rulethickness    = DIMENSION
<code>\baselinebottom</code>
<code>\baselineleftbox {...}</code> *    CONTENT
<code>\baselinemiddlebox {...}</code> *    CONTENT

$\backslash\text{baselinerightbox} \{...\}$ *    CONTENT
$\backslash\text{bordermatrix} \{...\}$ *    CONTENT
$\backslash\text{bbox} \{...\}$ *    CONTENT
$\backslash\text{beforesplitstring} \text{ }^1. \text{ } \backslash\text{at} \text{ }^2. \text{ } \backslash\text{to} \text{ }^3.$ 1    TEXT 2    TEXT 3    CSNAME
$\backslash\text{beforetestandsplitstring} \text{ }^1. \text{ } \backslash\text{at} \text{ }^2. \text{ } \backslash\text{to} \text{ }^3.$ 1    TEXT 2    TEXT 3    CSNAME
$\backslash\text{beginBLOCK} [...,*...] \dots \backslash\text{endBLOCK}$ *    + - NAME                    OPT
$\backslash\text{beginhbox} \dots \backslash\text{endhbox}$
$\backslash\text{beginofshapebox} \dots \backslash\text{endofshapebox}$
$\backslash\text{beginvbox} \dots \backslash\text{endvbox}$
$\backslash\text{beginvtop} \dots \backslash\text{endvtop}$
$\backslash\text{begstrut} \dots \backslash\text{endstrut}$
$\backslash\text{big} \text{ }^*$ *    CHARACTER
$\backslash\text{bigbodyfont}$
$\backslash\text{bigg} \text{ }^*$ *    CHARACTER
$\backslash\text{bigger}$
$\backslash\text{biggl} \text{ }^*$ *    CHARACTER
$\backslash\text{biggm} \text{ }^*$ *    CHARACTER
$\backslash\text{biggr} \text{ }^*$ *    CHARACTER
$\backslash\text{bigl} \text{ }^*$ *    CHARACTER
$\backslash\text{bigm} \text{ }^*$ *    CHARACTER

<b>\bigr</b> ... * CHARACTER
<b>\bigskip</b>
<b>\bitmapimage</b> [..., <sup>1</sup> ...,...] {... <sup>2</sup> .} 1 color = rgb cmyk gray width = DIMENSION height = DIMENSION x = NUMBER y = NUMBER 2 NUMBER
<b>\blackrule</b> [..., <sup>*</sup> ...,...] * inherits: \setupblackrules
<b>\blackrules</b> [..., <sup>*</sup> ...,...] * inherits: \setupblackrules
<b>\blank</b> [..., <sup>*</sup> ...] <p>* preference<sup>OPT</sup> samepage max force enable disable nowite packed back overlay always weak strong default before inbetween after fixed flexible none small medium big line halfline quarterline formula white height depth standard NUMBER*small NUMBER*medium NUMBER*big NUMBER*line NUMBER*halfline NUMBER*quarterline NUMBER*formula NUMBER*white NUMBER*height NUMBER*depth category:NUMBER order:NUMBER penalty:NUMBER DIMENSION NAME</p>
<b>\blap</b> {...} * CONTENT
<b>\bleed</b> [..., <sup>1</sup> ...,...] {... <sup>2</sup> .} 1 inherits: \setupbleeding 2 CONTENT
<b>\bleedheight</b>
<b>\bleedwidth</b>
<b>\blockligatures</b> [..., <sup>*</sup> ...] <p>* TEXT</p>
<b>\blocksynctexfile</b> [..., <sup>*</sup> ...] <p>* FILE</p>
<b>\bodyfontenvironmentlist</b>
<b>\bodyfontsize</b>
<b>\bold</b>
<b>\boldface</b>
<b>\bolditalic</b>
<b>\boldslanted</b>
<b>\bookmark</b> [... <sup>1</sup> .] {... <sup>2</sup> .} 1 SECTION LIST <sup>OPT</sup> 2 TEXT

<code>\booleanmodevalue {...}</code> * NAME
<code>\bordermatrix {...}</code> * CONTENT
<code>\bottombox {...}</code> * CONTENT
<code>\bottomleftbox {...}</code> * CONTENT
<code>\bottomrightbox {...}</code> * CONTENT
<code>\boxcursor</code>
<code>\boxmarker {...} {...}</code> 1 NAME 2 NUMBER
<code>\boxofsize \... ..<sup>2</sup> ..<sup>3</sup> {...}</code> 1 CSNAME 2 DIMENSION 3 CONTENT
<code>\boxreference [...,<sup>1</sup>...] \...<sup>2</sup> {...<sup>3</sup>}</code> 1 REFERENCE 2 CSNAME 3 CONTENT
<code>\bpar ... \epar</code>
<code>\bpos {...}</code> * NAME
<code>\breakhere</code>
<code>\breve {...}</code> * CHARACTER
<code>\bTABLE [...,<sup>*</sup>...,...] ... \eTABLE</code> * inherits: \setupTABLE
<code>\bTABLEbody [...,<sup>*</sup>...,...] ... \eTABLEbody</code> * inherits: \setupTABLE
<code>\bTABLEfoot [...,<sup>*</sup>...,...] ... \eTABLEfoot</code> * inherits: \setupTABLE
<code>\bTABLEhead [...,<sup>*</sup>...,...] ... \eTABLEhead</code> * inherits: \setupTABLE
<code>\bTABLEnext [...,<sup>*</sup>...,...] ... \eTABLEnext</code> * inherits: \setupTABLE
<code>\bTC [...,<sup>*</sup>...,...] ... \eTC</code> * inherits: \bTD

`\bTD [...,..*...,...] ... \eTD`

\* nx = <sup>OPTIONAL</sup>NUMBER  
ny = NUMBER  
nc = NUMBER  
nr = NUMBER  
n = NUMBER  
m = NUMBER  
action = REFERENCE  
inherits: \setupTABLE

`\bTDs [...] ... \eTDs`

\* NAME

`\bTH [...,..*...,...] ... \eTH`

\* inherits: <sup>OPTIONAL</sup>\bTD

`\bTN [...,..*...,...] ... \eTN`

\* inherits: <sup>OPTIONAL</sup>\bTD

`\bTR [...,..*...,...] ... \eTR`

\* inherits: <sup>OPTIONAL</sup>\setupTABLE

`\bTRs [...] ... \eTRs`

\* NAME

`\bTX [...,..*...,...] ... \eTX`

\* inherits: <sup>OPTIONAL</sup>\bTD

`\bTY [...,..*...,...] ... \eTY`

\* inherits: <sup>OPTIONAL</sup>\setupTABLE

`\btxabbreviatedjournal {...}`

\* NAME

`\btxaddjournal [...1.] [...2.]`

1 NAME

2 NAME

`\btxalwayscitation [...,..1...,...] [...2.]`

1 reference = REFERENCE <sup>OPTIONAL</sup>  
alternative = default category entry short page num textnum year index tag keywords author authoryears authornum  
authoryear  
before = COMMAND  
after = COMMAND  
left = COMMAND  
right = COMMAND  
inherits: \setupbtx  
2 REFERENCE

`\btxalwayscitation [...1.] [...2.]`

1 default category entry <sup>OPTIONAL</sup>short page num textnum year index tag keywords author authoryears authornum authoryear  
2 REFERENCE

`\btxalwayscitation [...,..1...,...] [...,..2...,...]`

1 reference = REFERENCE  
alternative = default category entry short page num textnum year index tag keywords author authoryears authornum  
authoryear  
before = COMMAND  
after = COMMAND  
left = COMMAND  
right = COMMAND  
inherits: \setupbtx  
2 KEY = VALUE



**\btxauthorfield {...}**

\* initials firstnames vons surnames juniors

**\btxdetail {...}**

\* address assignee author booktitle chapter day dayfiled edition editor howpublished institution journal language month monthfiled nationality note number one two organization pages publisher school series title type volume year yearfiled NAME

**\btxdirect {...}**

\* address assignee author booktitle chapter day dayfiled edition editor howpublished institution journal language month monthfiled nationality note number one two organization pages publisher school series title type volume year yearfiled NAME

**\btxdoif {...} {...}**

1 address assignee author booktitle chapter day dayfiled edition editor howpublished institution journal language month monthfiled nationality note number one two organization pages publisher school series title type volume year yearfiled NAME  
2 TRUE

**\btxdoifcombiinlistelse {...} {...} {...} {...}**

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

**\btxdoifelse {...} {...} {...}**

1 address assignee author booktitle chapter day dayfiled edition editor howpublished institution journal language month monthfiled nationality note number one two organization pages publisher school series title type volume year yearfiled NAME  
2 TRUE  
3 FALSE

**\btxdoifelsecombiinlist {...} {...} {...} {...}**

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

**\btxdoifelsesameasprevious {...} {...} {...}**

1 address assignee author booktitle chapter day dayfiled edition editor howpublished institution journal language month monthfiled nationality note number one two organization pages publisher school series title type volume year yearfiled NAME  
2 TRUE  
3 FALSE

**\btxdoifelsesameaspreviouschecked {...} {...} {...} {...}**

1 always doublesided  
2 address assignee author booktitle chapter day dayfiled edition editor howpublished institution journal language month monthfiled nationality note number one two organization pages publisher school series title type volume year yearfiled NAME  
3 TRUE  
4 FALSE

**\btxdoifelseuservariable {...} {...} {...}**

1 KEY  
2 TRUE  
3 FALSE

**\btxdoifnot {...} {...}**

1 address assignee author booktitle chapter day dayfiled edition editor howpublished institution journal language month monthfiled nationality note number one two organization pages publisher school series title type volume year yearfiled NAME  
2 TRUE

\btxdfsameaspreviouscheckedelse {...} {...} {...} {...}

1 always doublesided  
2 address assignee author booktitle chapter day dayfiled edition editor howpublished institution journal language  
month monthfiled nationality note number one two organization pages publisher school series title type volume year  
yearfiled NAME  
3 TRUE  
4 FALSE

\btxdfsameaspreviouselse {...} {...} {...}

1 address assignee author booktitle chapter day dayfiled edition editor howpublished institution journal language  
month monthfiled nationality note number one two organization pages publisher school series title type volume year  
yearfiled NAME  
2 TRUE  
3 FALSE

\btxdfuservariableelse {...} {...} {...}

1 KEY  
2 TRUE  
3 FALSE

\btfxexpandedjournal {...}

\* NAME

\btxfielfield {...}

\* address assignee author booktitle chapter day dayfiled edition editor howpublished institution journal language  
month monthfiled nationality note number one two organization pages publisher school series title type volume year  
yearfiled NAME

\btxfielfieldname {...}

\* address assignee author booktitle chapter day dayfiled edition editor howpublished institution journal language  
month monthfiled nationality note number one two organization pages publisher school series title type volume year  
yearfiled NAME

\btxfielfieldtype {...}

\* address assignee author booktitle chapter day dayfiled edition editor howpublished institution journal language  
month monthfiled nationality note number one two organization pages publisher school series title type volume year  
yearfiled NAME

\btxfirstofrange {...}

\* volume pages

\btxfielflush {...}

\* address assignee author booktitle chapter day dayfiled edition editor howpublished institution journal language  
month monthfiled nationality note number one two organization pages publisher school series title type volume year  
yearfiled NAME

\btxfielflushauthor [...] {...}

1 num normal normalshort<sup>OPT</sup> inverted invertedshort  
2 author editor

\btxfielflushauthorinverted {...}

\* author editor

\btxfielflushauthorinvertedshort {...}

\* author editor

\btxfielflushauthorname {...}

\* author editor

\btxfielflushauthornormal {...}

\* author editor

`\btxflushauthornormalshort {...}`

\* author editor

`\btxflushsuffix`

`\btxfoundname {...}`

\* address assignee author booktitle chapter day dayfiled edition editor howpublished institution journal language month monthfiled nationality note number one two organization pages publisher school series title type volume year yearfiled NAME

`\btxfoundtype {...}`

\* address assignee author booktitle chapter day dayfiled edition editor howpublished institution journal language month monthfiled nationality note number one two organization pages publisher school series title type volume year yearfiled NAME

`\btxhiddencitation [...]`

\* REFERENCE

`\btxhybridcite [...1...2...] [...]`

1 reference = REFERENCE<sup>REF</sup>  
alternative = default category entry short page num textnum year index tag keywords author authoryears authornum  
authoryear  
before = COMMAND  
after = COMMAND  
left = COMMAND  
right = COMMAND  
inherits: \setupbtx  
2 REFERENCE

`\btxhybridcite [...1...] [...]`

1 default category entry short page num textnum year index tag keywords author authoryears authornum authoryear  
2 REFERENCE

`\btxhybridcite {...}`

\* REFERENCE

`\btxhybridcite [...1...2...] [...2...]`

1 reference = REFERENCE  
alternative = default category entry short page num textnum year index tag keywords author authoryears authornum  
authoryear  
before = COMMAND  
after = COMMAND  
left = COMMAND  
right = COMMAND  
inherits: \setupbtx  
2 KEY = VALUE

`\btxlistcitation [...1...2...] [...]`

1 reference = REFERENCE<sup>REF</sup>  
alternative = default category entry short page num textnum year index tag keywords author authoryears authornum  
authoryear  
before = COMMAND  
after = COMMAND  
left = COMMAND  
right = COMMAND  
inherits: \setupbtx  
2 REFERENCE

`\btxlistcitation [...1...] [...]`

1 default category entry short page num textnum year index tag keywords author authoryears authornum authoryear  
2 REFERENCE

`\btxlistcitation [...,\stackrel{1}{=}\dots][...,\stackrel{2}{=}\dots]`

```
1 reference = REFERENCE
  alternative = default category entry short page num textnum year index tag keywords author authoryears authornum
    authoryear
  before = COMMAND
  after = COMMAND
  left = COMMAND
  right = COMMAND
  inherits: \setupbtx
2 KEY = VALUE
```

`\btxloadjournalist [...]`

`* FILE`

`\btxoneorrange {...} {...} {...}`

```
1 volume pages
2 TRUE
3 FALSE
```

`\btxremapauthor [...]\stackrel{1}{.} [...]\stackrel{2}{.}`

```
1 TEXT
2 TEXT
```

`\btxsavejournalist [...]`

`* FILE`

`\btxsetup {...}`

`* NAME`

`\btxsingularorplural {...}\stackrel{1}{.} {...}\stackrel{2}{.} {...}\stackrel{3}{.}`

```
1 editor producer director
2 TRUE
3 FALSE
```

`\btxsingularplural {...}\stackrel{1}{.} {...}\stackrel{2}{.} {...}\stackrel{3}{.}`

```
1 editor producer director
2 TRUE
3 FALSE
```

`\btxttextcitation [...,\stackrel{1}{=}\dots][...]\stackrel{2}{.}`

```
1 reference = REFERENCEOPT
  alternative = default category entry short page num textnum year index tag keywords author authoryears authornum
    authoryear
  before = COMMAND
  after = COMMAND
  left = COMMAND
  right = COMMAND
  inherits: \setupbtx
2 REFERENCE
```

`\btxttextcitation [...]\stackrel{1}{.} [...]\stackrel{2}{.}`

```
1 default category entryOPT short page num textnum year index tag keywords author authoryears authornum authoryear
2 REFERENCE
```

`\btxttextcitation [...,\stackrel{1}{=}\dots][...,\stackrel{2}{=}\dots]`

```
1 reference = REFERENCE
  alternative = default category entry short page num textnum year index tag keywords author authoryears authornum
    authoryear
  before = COMMAND
  after = COMMAND
  left = COMMAND
  right = COMMAND
  inherits: \setupbtx
2 KEY = VALUE
```

$\backslash$ buildmathaccent {...} {...} 1 CHARACTER 2 CHARACTER
$\backslash$ buildtextaccent {...} {...} 1 CHARACTER 2 CHARACTER
$\backslash$ buildtextbottomcomma {...} * CHARACTER
$\backslash$ buildtextbottomdot {...} * CHARACTER
$\backslash$ buildtextcedilla {...} * CHARACTER
$\backslash$ buildtextgrave {...} * CHARACTER
$\backslash$ buildtextmacron {...} * CHARACTER
$\backslash$ buildtextognek {...} * CHARACTER
$\backslash$ button [... <sup>1</sup> ... <sup>2</sup> ...] {...} [...] 1 inherits: $\setupbutton$ 2 TEXT 3 REFERENCE
$\backslash$ BUTTON [... <sup>1</sup> ... <sup>2</sup> ...] {...} [...] 1 inherits: $\setupbutton$ 2 TEXT 3 REFERENCE instances: button
$\backslash$ Caps {...} * TEXT
$\backslash$ Character {...} * NUMBER
$\backslash$ Characters {...} * NUMBER
$\backslash$ CONTEXT
$\backslash$ ConTeXt
$\backslash$ Context
$\backslash$ ConvertConstantAfter \ <sup>1</sup> ... <sup>2</sup> ... <sup>3</sup> ... 1 CSNAME 2 TEXT 3 TEXT

$\backslash\text{ConvertToConstant } \overset{1}{\dots} \{ \overset{2}{\dots} \} \{ \overset{3}{\dots} \}$ 1 CSNAME 2 TEXT 3 TEXT
$\backslash\text{calligraphic}$
$\backslash\text{camel } \{ \dots \}$ * TEXT
$\backslash\text{catcodetablename}$
$\backslash\text{cbox } \overset{1}{\dots} \{ \overset{2}{\dots} \}$ 1 TEXT <small>OPT</small> 2 CONTENT
$\backslash\text{centeraligned } \{ \dots \}$ * CONTENT
$\backslash\text{centerbox } \overset{1}{\dots} \{ \overset{2}{\dots} \}$ 1 TEXT <small>OPT</small> 2 CONTENT
$\backslash\text{centeredbox } \overset{1}{\dots} \{ \overset{2}{\dots} \}$ 1 TEXT <small>OPT</small> 2 CONTENT
$\backslash\text{centeredlastline}$
$\backslash\text{centerednextbox } \overset{1}{\dots} \{ \overset{2}{\dots} \}$ 1 TEXT <small>OPT</small> 2 CONTENT
$\backslash\text{centerline } \{ \dots \}$ * CONTENT
$\backslash\text{cfrac } [ \overset{1}{\dots} ] \{ \overset{2}{\dots} \} \{ \overset{3}{\dots} \}$ 1 l c r l <sup>PT</sup> lc lr cl cc cr rl rc rr 2 CONTENT 3 CONTENT
$\backslash\text{character } \{ \dots \}$ * NUMBER
$\backslash\text{CHARACTERKERNING } [ \overset{1}{\dots} ] \{ \overset{2}{\dots} \}$ 1 NUMBER <small>OPT</small> 2 TEXT
$\backslash\text{characters } \{ \dots \}$ * NUMBER
$\backslash\text{chardescription } \{ \dots \}$ * NUMBER
$\backslash\text{charwidthlanguage}$
$\backslash\text{check } \{ \dots \}$ * CHARACTER

<code>\checkcharacteralign {...}</code> *    CONTENT
<code>\checkedblank [...*,...]</code> *    inherits: \blank
<code>\checkedchar {...} {...}</code> 1    NUMBER 2    CHARACTER
<code>\checkedfiller {...}</code> *    sym symbol rule width space NAME COMMAND
<code>\checkedstrippedcsname \*..</code> *    CSNAME
<code>\checkedstrippedcsname ...</code> *    TEXT
<code>\checkinjector [...]</code> *    NAME
<code>\checknextindentation [...]</code> *    yes no auto
<code>\checknextinjector [...]</code> *    NAME
<code>\checkpage [...] [...,..<sup>2</sup>...,...]</code> 1    NAME 2    inherits: \setuppagechecker
<code>\checkparameters [...]</code> *    TEXT
<code>\checkpreviousinjector [...]</code> *    NAME
<code>\checksoundtrack {...}</code> *    NAME
<code>\checktwopassdata {...}</code> *    NAME
<code>\checkvariables [...] [...,..<sup>2</sup>...,...]</code> 1    NAME 2    set    = COMMAND reset = COMMAND KEY    = VALUE
<code>\chem {...} {...} {...}</code> 1    TEXT 2    TEXT 3    TEXT
<code>\chemical [...<sup>1</sup>] [...,<sup>2</sup>...] [...,<sup>3</sup>...]</code> 1    NAME            OPT 2    TEXT 3    TEXT

```
\chemicalbottext {...}
* TEXT
```

```
\chemicalmidtext {...}
* TEXT
```

```
\chemicalsymbol [...]
* NAME
```

```
\chemicaltext {...}
* TEXT
```

```
\chemicaltoptext {...}
* TEXT
```

```
\chineseallnumerals {...}
* NUMBER
```

```
\chinesecapnumerals {...}
* NUMBER
```

```
\chinesenumerals {...}
* NUMBER
```

```
\citation [...1...2] [...]
1 reference = REFERENCE
  alternative = default category entry short page num textnum year index tag keywords author authoryears authornum
                authoryear
  before      = COMMAND
  after       = COMMAND
  left        = COMMAND
  right       = COMMAND
  inherits: \setupbtx
2 REFERENCE
```

```
\citation [...1] [...2]
1 default category entry short page num textnum year index tag keywords author authoryears authornum authoryear
2 REFERENCE
```

```
\citation {...}
* REFERENCE
```

```
\citation [...1...2] [...2...2]
1 reference = REFERENCE
  alternative = default category entry short page num textnum year index tag keywords author authoryears authornum
                authoryear
  before      = COMMAND
  after       = COMMAND
  left        = COMMAND
  right       = COMMAND
  inherits: \setupbtx
2 KEY = VALUE
```

```
\cite [...1...2] [...2]
1 reference OPT= REFERENCE
  alternative = default category entry short page num textnum year index tag keywords author authoryears authornum
                authoryear
  before      = COMMAND
  after       = COMMAND
  left        = COMMAND
  right       = COMMAND
  inherits: \setupbtx
2 REFERENCE
```



`\cite [...1] [...2]`

1 default<sup>OPT</sup>category entry short page num textnum year index tag keywords author authoryears authornum authoryear  
2 REFERENCE

`\cite {...}`

\* REFERENCE

`\cite [...1...4...] [...2...5...]`

1 reference = REFERENCE  
alternative = default category entry short page num textnum year index tag keywords author authoryears authornum  
authoryear  
before = COMMAND  
after = COMMAND  
left = COMMAND  
right = COMMAND  
inherits: \setupbtx  
2 KEY = VALUE

`\clap {...}`

\* CONTENT

`\classfont {...1} {...2}`

1 NAME  
2 FONT

`\cldcommand {...}`

\* COMMAND

`\cldcontext {...}`

\* COMMAND

`\cldloadfile {...}`

\* FILE

`\cldprocessfile {...}`

\* FILE

`\clip [...1...4...] {...2}`

1 inherits: \setupclipping<sup>OPT</sup>  
2 CONTENT

`\clippedoverlayimage {...}`

\* FILE

`\clonefield [...1] [...2] [...3] [...4,...]`

1 NAME  
2 NAME  
3 NAME  
4 NAME

`\collect {...}`

\* CONTENT

`\collectedtext [...1...4...] [...2...5...] {...3} {...4}`

1 inherits: \setupcollect<sup>OPT</sup>  
2 style = STYLE COMMAND  
color = COLOR  
inherits: \setupframed  
3 TEXT  
4 CONTENT

`\collectexpanded {...}`

\* CONTENT

<code>\color [...]<sup>1</sup> {...}<sup>2</sup></code> 1    COLOR 2    CONTENT
<code>\colorbar [...]<sup>*</sup>,...]</code> *    COLOR
<code>\colorcomponents {...}</code> *    COLOR
<code>\colored [...,...<sup>1</sup>...,...]<sup>2</sup> {...}</code> 1    inherits: \definecolor 2    CONTENT
<code>\colored [...]<sup>1</sup> {...}<sup>2</sup></code> 1    COLOR 2    CONTENT
<code>\coloronly [...]<sup>1</sup> {...}<sup>2</sup></code> 1    COLOR 2    CONTENT
<code>\colorvalue {...}</code> *    COLOR
<code>\column [...]<sup>*</sup>,...]</code> *    inherits: \columnbreak
<code>\columnbreak [...]<sup>*</sup>,...]</code> *    yes no preference <sup>OPT</sup> local force first last NUMBER NAME
<code>\columnsetspanwidth {...}</code> *    NUMBER
<code>\combinepages [...]<sup>1</sup> [...,...<sup>2</sup>...,...]<sup>OPT</sup></code> 1    FILE 2    alternative        = a b c horizontal vertical n        = NUMBER nx        = NUMBER ny        = NUMBER start     = NUMBER stop      = NUMBER distance  = DIMENSION top       = COMMAND bottom    = COMMAND left      = COMMAND right     = COMMAND before    = COMMAND after     = COMMAND inbetween = COMMAND frame     = on <u>off</u> background = foreground color NAME backgroundcolor = COLOR
<code>\commalistelement</code>
<code>\commalistsentence [...]<sup>1</sup>,...]<sup>2</sup> [...]<sup>OPT</sup>,...]</code> 1    TEXT 2    TEXT
<code>\commalistsize</code>

$\backslash COMMENT$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sup>2</sup> ...] {...} 1 TEXT OPT OPT 2 inherits: \setupcomment 3 TEXT <b>instances:</b> comment
$\backslash comment$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sup>2</sup> ...] {...} 1 TEXT OPT OPT 2 inherits: \setupcomment 3 TEXT
$\backslash comparecolorgroup$ [...] * NAME
$\backslash comparedimension$ {...} {...} 1 DIMENSION 2 DIMENSION
$\backslash comparedimensioneps$ {...} {...} 1 DIMENSION 2 DIMENSION
$\backslash comparepalet$ [...] * NAME
$\backslash completebtxrendering$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sup>2</sup> ...] 1 NAME OPT OPT 2 inherits: \setupbtxrendering
$\backslash completeCOMBINEDLIST$ [... <sup>*</sup> ...] * inherits: \setupcombinedlist OPT <b>instances:</b> content
$\backslash completecontent$ [... <sup>*</sup> ...] * inherits: \setupcombinedlist OPT
$\backslash completelist$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sup>2</sup> ...] 1 LIST OPT 2 inherits: \setuplist
$\backslash completelistofFLOATS$ [... <sup>*</sup> ...] * inherits: \setuplist OPT <b>instances:</b> chemicals figures tables intermezzi graphics
$\backslash completelistofchemicals$ [... <sup>*</sup> ...] * inherits: \setuplist OPT
$\backslash completelistoffigures$ [... <sup>*</sup> ...] * inherits: \setuplist OPT
$\backslash completelistofgraphics$ [... <sup>*</sup> ...] * inherits: \setuplist OPT
$\backslash completelistofintermezzi$ [... <sup>*</sup> ...] * inherits: \setuplist OPT
$\backslash completelistoftables$ [... <sup>*</sup> ...] * inherits: \setuplist OPT

$\backslash\text{completelistofpublications}$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sup>*</sup> ...] 1 NAME OPT OPT 2 inherits: \setupbtxrendering
$\backslash\text{completelistofsorts}$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sup>*</sup> ...] 1 SINGULAR OPT 2 inherits: \setupsorting
$\backslash\text{completelistofSORTS}$ [ <sup>*</sup> ... <sup>*</sup> ...] * inherits: \setupsorting OPT instances: logos
$\backslash\text{completelistoflogos}$ [ <sup>*</sup> ... <sup>*</sup> ...] * inherits: \setupsorting OPT
$\backslash\text{completelistofsynonyms}$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sup>*</sup> ...] 1 SINGULAR OPT 2 inherits: \setupsynonyms
$\backslash\text{completelistofSYNONYMS}$ [ <sup>*</sup> ... <sup>*</sup> ...] * inherits: \setupsynonyms OPT instances: abbreviations
$\backslash\text{completelistofabbreviations}$ [ <sup>*</sup> ... <sup>*</sup> ...] * inherits: \setupsynonyms OPT
$\backslash\text{completepagenumber}$
$\backslash\text{completeregister}$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sup>*</sup> ...] 1 NAME OPT 2 inherits: \setupregister
$\backslash\text{completeREGISTER}$ [ <sup>*</sup> ... <sup>*</sup> ...] * inherits: \setupregister OPT instances: index
$\backslash\text{completeindex}$ [ <sup>*</sup> ... <sup>*</sup> ...] * inherits: \setupregister OPT
$\backslash\text{complexorsimple}$ \*.. * CSNAME
$\backslash\text{complexorsimpleempty}$ \*.. * CSNAME
$\backslash\text{complexorsimpleempty}$ {\*..} * TEXT CSNAME
$\backslash\text{complexorsimple}$ {\*..} * TEXT CSNAME
$\backslash\text{component}$ [ <sup>*</sup> ...] * FILE
$\backslash\text{component}$ *.. * FILE

<code>\composedcollector {...}</code> *    NAME
<code>\composedlayer {...}</code> *    NAME
<code>\compresult</code>
<code>\constantdimen \*..</code> *    CSNAME
<code>\constantdimenargument \*..</code> *    CSNAME
<code>\constantemptyargument \*..</code> *    CSNAME
<code>\constantnumber \*..</code> *    CSNAME
<code>\constantnumberargument \*..</code> *    CSNAME
<code>\contentreference [...<sup>1</sup>,...] [...<sup>2</sup><sub>OPT</sub>,...] {...<sup>3</sup>}</code> 1    REFERENCE 2    inherits: \setupframed 3    CONTENT
<code>\continuednumber {...}</code> *    NUMBER
<code>\continueifinputfile {...}</code> *    FILE
<code>\convertargument <sup>1</sup>... \to <sup>2</sup>...</code> 1    TEXT 2    CSNAME
<code>\convertcommand \<sup>1</sup>... \to \<sup>2</sup>...</code> 1    CSNAME 2    CSNAME
<code>\convertedcounter [<sup>1</sup>...] [...<sup>2</sup><sub>OPT</sub>,...]</code> 1    NAME 2    inherits: \setupcounter
<code>\convertedddimen {<sup>1</sup>...} {<sup>2</sup>...}</code> 1    DIMENSION 2    ex em pt in cm mm sp bp pc dd cc nc
<code>\convertedsubcounter [<sup>1</sup>...] [<sup>2</sup><sub>OPT...] [...<sup>3</sup><sub>OPT</sub>,...]</sub></code> 1    NAME 2    NUMBER NUMBER:NUMBER NUMBER:* NUMBER:all 3    inherits: \setupcounter
<code>\convertmonth {...}</code> *    NUMBER

$\backslash\text{convertnumber}$ $\{.^1.\}$ $\{.^2.\}$ 1 empty default none month month:mnem character Character characters Characters a A Numbers word words Word Words n N romannumerals Romannumerals i I r R KR RK greek Greek g G abjadnumerals abjadnodotnumerals abjadnaivenumerals thainumerals devanagarinumerals gurmukhinumerals gujaratinnumerals tibetannumerals greeknumerals Greeknumerals arabicnumerals persiannumerals arabicexnumerals arabicdecimals persiandecimals koreannumerals koreanparentnumerals koreancirlenumerals kr kr-p kr-c chinesenumerals chinesecapnumerals chineseallnumerals cn cn-c cn-a sloveniannumerals slovenianNumerals spanishnumerals spanishNumerals mathgreek set_0 set_1 set_2 set_3 continued NAME 2 NUMBER
$\backslash\text{convertvalue}$ $\{.^1.\}$ $\backslash\text{to}$ $\{.^2.\}$ 1 NAME 2 CSNAME
$\backslash\text{convertvboxtohbox}$
$\backslash\text{copyboxfromcache}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ 1 NAME 2 NUMBER TEXT 3 CSNAME NUMBER
$\backslash\text{copyfield}$ $\{.^1.\}$ $\{.^2.\}$ 1 NAME 2 NAME
$\backslash\text{copyLABELtext}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ 1 LANGUAGE OPT 2 KEY = KEY instances: head label mathlabel taglabel unit operator prefix suffix btxlabel
$\backslash\text{copybtxlabeltext}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ 1 LANGUAGE OPT 2 KEY = KEY
$\backslash\text{copyheadtext}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ 1 LANGUAGE OPT 2 KEY = KEY
$\backslash\text{copylabeltext}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ 1 LANGUAGE OPT 2 KEY = KEY
$\backslash\text{copymathlabeltext}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ 1 LANGUAGE OPT 2 KEY = KEY
$\backslash\text{copyoperatorortext}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ 1 LANGUAGE OPT 2 KEY = KEY
$\backslash\text{copyprefixtext}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ 1 LANGUAGE OPT 2 KEY = KEY
$\backslash\text{copiesuffixtext}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ 1 LANGUAGE OPT 2 KEY = KEY
$\backslash\text{copytaglabeltext}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ 1 LANGUAGE OPT 2 KEY = KEY

`\copyunittext [...]1 [...,...2...,...]`

1 LANGUAGE OPT  
2 KEY = KEY

`\copypages [...]1 [...,...2...,...]2 [...,...3...,...]3`

1 FILE OPT OPT  
2 marking = on off  
offset = DIMENSION  
n = NUMBER  
3 inherits: \setupexternalfigure

`\copyparameters [...]1 [...]2 [...]3,...`

1 TEXT  
2 TEXT  
3 KEY

`\copyposition {...}1 {...}2`

1 NAME  
2 NAME

`\copysetups [...]1 [...]2`

1 NAME  
2 NAME

`\correctwhitespace {...}`

\* CONTENT

`\countersubs [...]1 [...]2`

1 NAME OPT  
2 NUMBER

`\counttoken ...1 \in ...2 \to \...3`

1 TEXT  
2 TEXT  
3 CSNAME

`\counttokens ...1 \to \...2`

1 TEXT  
2 CSNAME

`\cramped {...}`

\* CONTENT

`\crampedclap {...}`

\* CONTENT

`\crampedllap {...}`

\* CONTENT

`\crampedrlap {...}`

\* CONTENT

`\ctop ...1 {...}2`

1 TEXT OPT  
2 CONTENT

`\ctxcommand {...}`

\* COMMAND

`\ctxdirectcommand {...}`

\* COMMAND

\ctxdirectlua {...} *   COMMAND
\ctxfunction {...} *   NAME
\CTXFUNCTIONDEFINITION
\CTXFUNCTION
\ctxlatecommand {...} *   COMMAND
\ctxlatelua {...} *   COMMAND
\ctxloadluafile {...} *   FILE
\ctxlua {...} *   COMMAND
\ctxluabuffer [...] *   BUFFER                   OPT
\ctxluacode {...} *   COMMAND
\ctxreport {...} *   COMMAND
\ctxsprint {...} *   COMMAND
\currentassignmentlistkey
\currentassignmentlistvalue
\currentbtxuservariable {...} *   KEY
\currentcommalistitem
\currentcomponent
\currentdate [...*,...] *   year month day weekDay y yy Y m mm M d dd D w W space \_ month:mnem m:mnem d:ord day:ord dd:ord D:ord TEXT referral day:+ day:++ d:+ d:++ dd:+ dd:++ D:+ D:++ month:jalali m:jalali jalali:to jalali:from
\currentenvironment
\currentfeaturetest
\currenttheadnumber



\currentinterface
\currentLABEL [..., <sup>1</sup> ...] {...} <sup>2</sup> 1   REFERENCE                   OPT           OPT 2   TEXT
\currentlanguage
\currentlistentrydestinationattribute
\currentlistentrylimitedtext {...} *   TEXT
\currentlistentrynumber
\currentlistentrypagenumber
\currentlistentryreferenceattribute {...} *   number text pagenumber all
\currentlistentrytitle
\currentlistentrytitlerendered
\currentlistsymbol
\currentmainlanguage
\currentmessagetext
\currentmoduleparameter {...} *   KEY
\currentoutputstream
\currentproduct
\currentproject
\currentregime
\currentregisterpageuserdata {...} *   KEY
\currentresponses
\currenttime [...,*...] *   h m TEXT                   OPT
\currentvalue
\currentxtablecolumn
\currentxtablerow

\ d {...} * CHARACTER
\ datasetvariable {...} {...} {...} 1 NAME 2 NAME NUMBER 3 KEY realpage
\ date [..., <sup>1</sup> ...,...] [..., <sup>2</sup> ...] 1 d = NUMBER <sup>PT</sup> OPT m = NUMBER y = NUMBER 2 inherits: \currentdate
\ dayoftheweek {...} {...} {...} 1 NUMBER 2 NUMBER 3 NUMBER
\ dayspermonth {...} {...} 1 NUMBER 2 NUMBER
\ dddot {...} * CHARACTER
\ ddot {...} * CHARACTER
\ decrement \*... * CSNAME
\ decrementcounter [...] <sup>1</sup> [...] <sup>2</sup> 1 NAME OPT 2 NUMBER
\ decrementedcounter [...] * NAME
\ decrementpagenumber
\ decrementsubpagenumber
\ decrementvalue {...} * NAME
\ decrement (...,*...) * CSNAME NUMBER
\ defaultinterface
\ defaultobjectpage
\ defaultobjectreference
\ defcatcodecommand \... <sup>1</sup> ... <sup>2</sup> {...} <sup>3</sup> 1 CSNAME 2 CHARACTER NUMBER 3 COMMAND

`\defconvertedargument \1... {\2...}`

1 CSNAME  
2 TEXT

`\defconvertedcommand \1... \2...`

1 CSNAME  
2 CSNAME

`\defconvertedvalue \1... {\2...}`

1 CSNAME  
2 NAME

`\define [1...] \2... {\3...}`

1 NUMBER OPT  
2 CSNAME  
3 CONTENT

`\defineaccent 1... 2... 3...`

1 CHARACTER  
2 CHARACTER  
3 CHARACTER

`\defineactivecharacter 1... {\2...}`

1 CHARACTER  
2 COMMAND

`\definealternativestyle [...,1...] [2...] [3...]`

1 NAME  
2 COMMAND  
3 COMMAND

`\defineanchor [1...] [2...] [...,3...,...] [...,4...,...]`

1 NAME  
2 NAME  
3 inherits: \setupplayer  
4 inherits: \setupplayerinherits: \setupframed

`\defineattachment [1...] [2...] [...,3...,...]`

1 NAME  
2 NAME  
3 inherits: \setupattachment

`\defineattribute [1...] [...,2...,...]`

1 NAME  
2 local global public private pickup

`\definebackground [1...] [2...] [...,3...,...]`

1 NAME  
2 NAME  
3 inherits: \setupbackground

`\definebar [1...] [2...] [...,3...,...]`

1 NAME  
2 NAME  
3 inherits: \setupbar

`\defineblock [1...] [2...] [...,3...,...]`

1 NAME  
2 NAME  
3 inherits: \setupblock

```

\definebodyfont [...] [...] [...] [...] [...]
1 NAME default          OPT
2 NAME DIMENSION
3 rm ss tt hw cg
4 tf = FILE
  bf = FILE
  it = FILE
  sl = FILE
  bi = FILE
  bs = FILE
  sc = FILE
  mr = FILE
  mrlr = FILE
  mrrl = FILE
  mb = FILE
  mblr = FILE
  mbrl = FILE

```

```

\definebodyfontenvironment [...] [...] [...]
1 NAME          OPT
2 default DIMENSION
3 big           = DIMENSION NUMBER
  small         = DIMENSION NUMBER
  a             = DIMENSION NUMBER
  b             = DIMENSION NUMBER
  c             = DIMENSION NUMBER
  d             = DIMENSION NUMBER
  text          = DIMENSION NUMBER
  x             = DIMENSION NUMBER
  xx            = DIMENSION NUMBER
  script        = DIMENSION NUMBER
  scriptscript  = DIMENSION NUMBER
  interlinespace = DIMENSION
  em            = slanted italic STYLE COMMAND
  *             = NUMBER

```

```

\definebodyfontswitch [...] [...]
1 NAME
2 inherits: \setupbodyfont

```

```

\definebodyfont [...] [...] [...] [...]
1 NAME default          OPT
2 NAME DIMENSION
3 rm ss tt hw cg
4 NAME

```

```

\definebreakpoint [...] [...] [...]
1 NAME          OPT
2 CHARACTER
3 type          = 1 2 3 4 5
  nleft         = NUMBER
  nright        = NUMBER
  left          = COMMAND
  middle        = COMMAND
  right         = COMMAND
  range         = yes no
  language      = LANGUAGE

```

```

\definebreakpoints [...]
* NAME

```

```

\definebtx [...] [...] [...]
1 NAME          OPT
2 NAME          OPT
3 inherits: \setupbtx

```

```

\definebtxdataset [...] [...] [...]
1 NAME          OPT
2 NAME          OPT
3 inherits: \setupbtxdataset

```

```
\definebtxregister [...1] [...2] [...3...,...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupbtxregister
```

```
\definebtxrendering [...1] [...2] [...3...,...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupbtxrendering
```

```
\definebuffer [...1] [...2] [...3...,...]
1 NAME OPT OPT
2 BUFFER
3 inherits: \setupbuffer
```

```
\definebutton [...1] [...2] [...3...,...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupbutton
```

```
\definecapitals [...1] [...2] [...3...,...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupcapitals
```

```
\definecharacter ...1 ...2
1 CHARACTER
2 NUMBER
```

```
\definecharacterkerning [...1] [...2] [...3...,...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupcharacterkerning
```

```
\definecharacterspacing [...*]
* NAME
```

```
\definechemical [...1] {...2}
1 NAME
2 CONTENT
```

```
\definechemicals [...1] [...2] [...3...,...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupchemical
```

```
\definechemicalsymbol [...1] [...2]
1 NAME
2 TEXT
```

```
\definecollector [...1] [...2] [...3...,...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupcollector
```

`\definecolor [...]1 [...,...2...,...]`

```
1 NAME
2 r = NUMBER
  g = NUMBER
  b = NUMBER
  c = NUMBER
  m = NUMBER
  y = NUMBER
  k = NUMBER
  h = NUMBER
  s = NUMBER
  v = NUMBER
  x = NUMBER
  a = NUMBER none normal multiply screen overlay softlight hardlight colordodge colorburn darken lighten difference
    exclusion hue saturation color luminosity
  t = NUMBER
```

`\definecolorgroup [...]1 [...]2 [x:y:z,...]3`

```
1 NAME OPT
2 gray rgb cmyk spot
3 TRIPLET
```

`\definecolor [...]1 [...]2`

```
1 NAME
2 COLOR
```

`\definecolumnbreak [...]1 [...]2,...]`

```
1 NAME
2 yes no preference local force first last NUMBER
```

`\definecolumnset [...]1 [...]2 [...,...3...,...]`

```
1 NAME OPT OPT
2 NAME
3 inherits: \setupcolumnset
```

`\definecolumnsetarea [...]1 [...]2 [...,...3...,...]`

```
1 NAME OPT OPT
2 NAME
3 inherits: \setupcolumnsetarea
```

`\definecolumnsetspan [...]1 [...]2 [...,...3...,...]`

```
1 NAME OPT OPT
2 NAME
3 inherits: \setupcolumnsetspan
```

`\definecombination [...]1 [...]2 [...,...3...,...]`

```
1 NAME OPT OPT
2 NAME
3 inherits: \setupcombination
```

`\definecombinedlist [...]1 [...]2,...] [...,...3...,...]`

```
1 NAME OPT
2 LIST
3 inherits: \setupcombinedlist
```

`\definecommand ...1 ...2`

```
1 CHARACTER
2 COMMAND
```

`\definecomment [...]1 [...]2 [...,...3...,...]`

```
1 NAME OPT OPT
2 NAME
3 inherits: \setupcomment
```

`\definecomplexorsimple \*...`

```
* CSNAME
```

```
\definecomplexorsimpleempty \...
* CSNAME
```

```
\definecomplexorsimpleempty {...}
* TEXT CSNAME
```

```
\definecomplexorsimple {...}
* TEXT CSNAME
```

```
\defineconversion [1...] [2...] [3...]
1 LANGUAGE OPT
2 NAME
3 CSNAME
```

```
\defineconversionset [1...] [...,2...] [3...]
1 NAME SECTIONBLOCK:NAME OPT
2 NAME PROCESSOR->NAME
3 NAME PROCESSOR->NAME
```

```
\defineconversion [1...] [2...] [...,3...]
1 LANGUAGE OPT
2 NAME
3 TEXT
```

```
\definecounter [1...] [2...] [...,3...,...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupcounter
```

```
\definedataset [1...] [2...] [...,3...,...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupdataset
```

```
\definedelimitedtext [1...] [2...] [...,3...,...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupdelimitedtext
```

```
\definedescription [1...] [2...] [...,3...,...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupdescription
```

```
\definedfont [...]*
* FONT OPT
```

```
\defineeffect [1...] [2...] [...,3...,...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupeffect
```

```
\defineenumeration [1...] [2...] [...,3...,...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupenumeration
```

```
\defineexpandable [1...] \2... {3...}
1 NUMBER OPT
2 CSNAME
3 CONTENT
```

```
\defineexternalfigure [...1] [...2] [...,3...,...]
1 NAME
2 NAME
3 inherits: \setupexternalfigure
```

```
\definefacingfloat [...1] [...2] [...,3...,...]
1 NAME
2 NAME
3 inherits: \setupfacingfloat
```

```
\definefallbackfamily [...1] [...2] [...3] [...,4...,...]
1 NAME
2 rm ss tt mm hw cg roman serif regular sansserif sans support teletype type mono handwritten calligraphic math
mathematics
3 FONT
4 rscale = NUMBER
designsize = default auto
goodies = FILE
range = NUMBER NAME
offset = NUMBER NAME
check = yes no
force = yes no
features = NAME
tf = TEXT
bf = TEXT
it = TEXT
sl = TEXT
bi = TEXT
bs = TEXT
sc = TEXT
```

```
\definefallbackfamily [...1] [...2] [...3] [...,4...,...]
1 NAME
2 rm ss tt mm hw cg roman serif regular sansserif sans support teletype type mono handwritten calligraphic math
mathematics
3 FONT
4 NAME
```

```
\definefield [...1] [...2] [...3] [...,4...,...] [...5]
1 NAME
2 radio sub text line push check signature
3 NAME
4 NAME
5 NAME
```

```
\definefieldbody [...1] [...2] [...,3...,...]
1 NAME
2 NAME
3 inherits: \setupfieldbody
```

```
\definefieldbodyset [...1] [...,2...,...]
1 NAME
2 NAME
```

```
\definefieldcategory [...1] [...2] [...,3...,...]
1 NAME
2 NAME
3 inherits: \setupfieldcategory
```

```
\definefieldstack [...1] [...,2...,...] [...,3...,...]
1 NAME
2 NAME
3 inherits: \setupfieldcategory
```

```
\definefiguresymbol [...1] [...2] [...,3...,...]
1 NAME
2 FILE NAME
3 inherits: \externalfigure
```



**\definefileconstant** {...} {...}

- 1 NAME
- 2 NAME

**\definefilefallback** [...] [...,<sup>2</sup>...]

- 1 NAME
- 2 FILE

**\definefilesynonym** [...] [...]

- 1 NAME
- 2 FILE

**\definefiller** [...] [...]<sup>2</sup> [...] [...,<sup>3</sup>...]

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupfiller

**\definefirstline** [...] [...]<sup>2</sup> [...] [...,<sup>3</sup>...]

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupfirstline

**\definefittingpage** [...] [...]<sup>2</sup> [...] [...,<sup>3</sup>...]

- 1 NAME OPT OPT
- 2 NAME
- 3 inherits: \setupfittingpage

**\definefloat** [...] [...]<sup>2</sup> [...] [...,<sup>3</sup>...]

- 1 SINGULAR OPT OPT
  - 2 SINGULAR PLURAL
  - 3 inherits: \setupfloat
- instances: chemical figure table intermezzo graphic

**\definefloat** [...] [...]<sup>2</sup> [...] [...]

- 1 SINGULAR OPT OPT
  - 2 PLURAL
  - 3 SINGULAR
- instances: chemical figure table intermezzo graphic

**\definefont** [...] [...]<sup>2</sup> [...] [...,<sup>3</sup>...]

- 1 NAME OPT
- 2 FONT
- 3 inherits: \setupinterlinespace

**\definefontalternative** [...]

- \* NAME

**\definefontfallback** [...] [...]<sup>2</sup> [...] [...,<sup>3</sup>...] [...] [...,<sup>4</sup>...]

- 1 NAME OPT
- 2 FONT NAME
- 3 NAME NUMBER
- 4 rscale = NUMBER
- force = yes no
- check = yes no
- offset = NUMBER NAME
- target = NUMBER NAME
- features = NAME
- factor = NUMBER
- method = lowercase uppercase

```

\definefontfamily [...] [...] [...] [...] [...]
1  NAME
2  rm ss tt mm hw cg roman serif regular sansserif sans support teletype type mono handwritten calligraphic math
   mathematics
3  FONT
4  rscale      = NUMBER
   designsizes = default auto
   goodies     = FILE
   features    = NAME
   tf          = TEXT
   bf          = TEXT
   it          = TEXT
   sl          = TEXT
   bi          = TEXT
   bs          = TEXT
   sc          = TEXT

```

```

\definefontfamilypreset [...] [...]
1  NAME
2  inherits: \definefontfamily

```

```

\definefontfamilypreset [...] [...]
1  NAME
2  NAME

```

```

\definefontfamily [...] [...] [...] [...] [...]
1  NAME
2  rm ss tt mm hw cg roman serif regular sansserif sans support teletype type mono handwritten calligraphic math
   mathematics
3  FONT
4  NAME

```

```

\definefontfeature [...] [...] [...] [...]
1  NAME
2  NAME
3  language      = NAME
    script       = NAME auto
    mode         = node base auto none
    liga         = yes no
    kern         = yes no
    extrakerns   = yes no
    tlig         = yes no
    trep         = yes no
    missing      = yes no
    dummies      = yes no
    analyze      = yes no
    unicoding    = yes no
    expansion    = NAME
    protrusion   = NAME
    nostackmath  = yes no
    realdimensions = yes no
    itlc         = yes no
    textitalics  = yes no
    mathitalics  = yes no
    slant        = NUMBER
    extend       = NUMBER
    dimensions   = NUMBER
    boundingbox   = yes no background frame empty COLOR
    compose      = yes no
    char-ligatures = yes no
    compat-ligatures = yes no
    goodies      = FILE
    extrafeatures = yes no
    featureset    = NAME
    colorscheme  = NAME
    postprocessor = NAME
    mathdimensions = NAME
    keepligatures = yes no auto
    devanagari    = yes no
    features     = yes no
    tcom         = yes no
    anum         = yes no
    mathsize     = yes no
    decomposehangul = yes no
    mathalternatives = yes no
    mathgaps     = yes no
    checkmarks   = yes no
    NAME         = yes no
    mathnolimitsmode = NUMBER
    blockligatures = yes no

```

```

\definefontfile [...] [...] [...]
1  NAME
2  FILE
3  features      = NAME
    fallbacks    = NAME
    goodies      = NAME
    designsize   = auto default

```

```

\definefontsize [...]
*  NAME

```

```

\definefontsolution [...] [...] [...]
1  NAME
2  NAME
3  inherits: \setupfontsolution

```

```

\definefontstyle [...] [...]
1  NAME
2  NAME

```

```

\definefontsynonym [...] [...] [...]...3...
1 NAME
2 FONT
3 features = NAME
   fallbacks = NAME
   goodies = NAME
   designsize = auto default

```

```

\definefont [...] [...] [...]
1 NAME
2 FONT
3 NAME

```

```

\defineformula [...] [...] [...]...3...
1 NAME
2 NAME
3 inherits: \setupformula

```

```

\defineformulaalternative [...] [...] [...]
1 NAME
2 CSNAME
3 CSNAME

```

```

\defineformulaframed [...] [...] [...]...3...
1 NAME
2 NAME
3 inherits: \setupformulaframed

```

```

\defineframed [...] [...] [...]...3...
1 NAME
2 NAME
3 inherits: \setupframed

```

```

\defineframedcontent [...] [...] [...]...3...
1 NAME
2 NAME
3 inherits: \setupframedcontent

```

```

\defineframedtable [...] [...]
1 NAME
2 NAME

```

```

\defineframedtext [...] [...] [...]...3...
1 NAME
2 NAME
3 inherits: \setupframedtext

```

```

\definefrozenfont [...] [...]
1 NAME
2 FONT

```

```

\defineglobalcolor [...] [...]...2...
1 NAME
2 inherits: \definecolor

```

```

\defineglobalcolor [...] [...]
1 NAME
2 COLOR

```

```

\definegraphicstylesynonym [...] [...]
1 NAME
2 NAME

```

**\definegridsnapping** [<sup>1</sup>...] [<sup>2</sup>...,...]

1 NAME  
2 local global noheight nodepth box max min none line halfline first last minheight maxheight mindepth maxdepth  
top bottom strut NUMBER minheight:NUMBER maxheight:NUMBER mindepth:NUMBER maxdepth:NUMBER box:NUMBER top:NUMBER  
bottom:NUMBER offset:NUMBER

**\definehbox** [<sup>1</sup>...] [<sup>2</sup>...]

1 NAME  
2 DIMENSION

**\definehead** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME OPT OPT  
2 SECTION  
3 inherits: \setuphead

**\defineheadalternative** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupheadalternative

**\definehelp** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuphelp

**\definehigh** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuphigh

**\definehighlight** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuphighlight

**\definehspace** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...]

1 NAME OPT  
2 NAME  
3 DIMENSION

**\definehyphenationfeatures** [<sup>1</sup>...] [<sup>2</sup>...,...]

1 NAME  
2 characters = TEXT  
hyphens = yes all TEXT  
joiners = yes all TEXT  
rightwords = NUMBER  
hyphenmin = NUMBER  
lefthyphenmin = NUMBER  
righthyphenmin = NUMBER  
lefthyphenchar = NUMBER  
righthyphenchar = NUMBER  
alternative = original tex hyphenate expanded traditional none  
rightedge = tex  
rightchars = word NUMBER

**\defineindentedtext** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupindentedtext

**\defineindenting** [<sup>1</sup>...] [<sup>2</sup>...,...]

1 NAME  
2 [-+]small [-+]medium [-+]big none no not first next yes always never odd even normal reset toggle DIMENSION

```
\defineinitial [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupinitial
```

```
\defineinsertion [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupinsertion
```

```
\defineinteraction [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupinteraction
```

```
\defineinteractionbar [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupinteractionbar
```

```
\defineinteractionmenu [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupinteractionmenu
```

```
\defineinterfaceconstant {...} {...}
1 NAME
2 NAME
```

```
\defineinterfaceelement {...} {...}
1 NAME
2 NAME
```

```
\defineinterfacevariable {...} {...}
1 NAME
2 NAME
```

```
\defineinterlinespace [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupinterlinespace
```

```
\defineintermediatecolor [...] [...] [...] [...]
1 NAME
2 COLOR NUMBER
3 a = NUMBER
t = NUMBER
```

```
\defineitemgroup [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupitemgroup
```

```
\defineitems [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setupitems
```

```
\definelabel [...] [...] [...] [...]
1 NAME
2 NAME
3 inherits: \setuplabel
```

**\definelabelclass** [<sup>1</sup>...] [<sup>2</sup>...]

1 NAME OPT  
2 NUMBER

**\definelayer** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME OPT  
2 NAME OPT  
3 inherits: \setuplayer

**\definelayerpreset** [<sup>1</sup>...] [<sup>2</sup>...,...]

1 NAME  
2 inherits: \setuplayer

**\definelayerpreset** [<sup>1</sup>...] [<sup>2</sup>...]

1 NAME  
2 NAME

**\definelayout** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuplayout

**\definelinefiller** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuplinefiller

**\definelinenote** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuplinenote

**\definelinenumbering** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuplinenumbering

**\definelines** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuplines

**\definelist** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME OPT OPT  
2 LIST  
3 inherits: \setuplist

**\definelistalternative** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuplistalternative

**\definelistextra** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuplistextra

**\definelow** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuplow

`\definelowhigh [1...] [2...] [3...=...]`

1 NAME  
2 NAME  
3 inherits: \setuplowhigh

`\definelowmidhigh [1...] [2...] [3...=...]`

1 NAME  
2 NAME  
3 inherits: \setuplowmidhigh

`\defineMPinstance [1...] [2...] [3...=...]`

1 NAME  
2 NAME  
3 inherits: \setupMPinstance

`\definemakeup [1...] [2...] [3...=...]`

1 NAME  
2 NAME  
3 inherits: \setupmakeup

`\definemarginblock [1...] [2...] [3...=...]`

1 NAME  
2 NAME  
3 inherits: \setupmarginblock

`\definemargindata [1...] [2...] [3...=...]`

1 NAME  
2 NAME  
3 inherits: \setupmargindata

`\definemarker [...]`

\* NAME

`\definemarking [1...] [2...] [3...=...]`

1 NAME  
2 MARK  
3 inherits: \setupmarking

`\definemathaccent 1... 2...`

1 NAME  
2 CHARACTER

`\definemathalignment [1...] [2...] [3...=...]`

1 NAME  
2 NAME  
3 inherits: \setupmathalignment

`\definemathcases [1...] [2...] [3...=...]`

1 NAME  
2 NAME  
3 inherits: \setupmathcases

`\definemathcommand [1...] [2...] [3...] {4...}`

1 NAME  
2 ord op bin rel open close punct alpha inner nothing limop nolop box  
3 one two  
4 COMMAND \...#1 \...#1#2

`\definemathdouble [1...] [2...] [3...] [4...]`

1 both vfenced NAME  
2 NAME  
3 NUMBER  
4 NUMBER



```

\definemathdoubleextensible [...] [...] [...] [...]
1 both vfenced OPT
2 NAME
3 NUMBER
4 NUMBER

```

```

\definematheconomics [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmatheconomics

```

```

\definemathextensible [...] [...] [...]
1 reverse mathematics text chemistry
2 NAME
3 NUMBER

```

```

\definemathfence [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathfence

```

```

\definemathfraction [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathfraction

```

```

\definemathframed [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathframed

```

```

\definemathmatrix [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathmatrix

```

```

\definemathornament [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathornament

```

```

\definemathover [...] [...] [...]
1 top vfenced NAME
2 NAME
3 NUMBER

```

```

\definemathoverextensible [...] [...] [...]
1 top vfenced OPT
2 NAME
3 NUMBER

```

```

\definemathovertextextensible [...] [...] [...]
1 bothtext OPT
2 NAME
3 NUMBER

```

```

\definemathradical [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathradical

```

```

\definemathstackers [...] [...] [...] [...]
1 NAME OPT OPT
2 NAME
3 inherits: \setupmathstackers

```

<pre> \definemathstyle [...] [...] 1 NAME 2 display text script scriptscript cramped uncramped normal packed small big </pre>
<pre> \definemathtriplet [...] [...] [...] 1 NAME          OPT          OPT 2 NAME 3 TEXT </pre>
<pre> \definemathunder [...] [...] [...] 1 bottom vfenced NAME 2 NAME 3 NUMBER </pre>
<pre> \definemathunderextensible [...] [...] [...] 1 bottom vfenced          OPT 2 NAME 3 NUMBER </pre>
<pre> \definemathundertexttextensible [...] [...] [...] 1 bothtext          OPT 2 NAME 3 NUMBER </pre>
<pre> \definemathunstacked [...] [...] [...] 1 wide          OPT 2 NAME 3 NUMBER </pre>
<pre> \definemeasure [...] [...] 1 NAME 2 DIMENSION </pre>
<pre> \definemessageconstant {...} * NAME </pre>
<pre> \definemixedcolumns [...] [...] [...] [...] 1 NAME          OPT          OPT 2 NAME 3 inherits: \setupmixedcolumns </pre>
<pre> \definemode [...] [...] 1 NAME          OPT 2 yes <u>no</u> keep </pre>
<pre> \definemultitonecolor [...] [...] [...] [...] [...] 1 NAME 2 COLOR = NUMBER 3 inherits: \definecolor 4 inherits: \definespotcolor </pre>
<pre> \definenamecolor [...] [...] [...] 1 NAME 2 inherits: \definecolor </pre>
<pre> \definenamecolor [...] [...] 1 NAME 2 COLOR </pre>

`\definenamespace` [<sup>1</sup>...] [<sup>2</sup>...<sub>2</sub>...]

```
1 NAME
2 name = TEXT
  parent = TEXT
  style = yes no
  command = yes no list
  setup = yes no list
  set = yes no list
  frame = yes no
```

`\definennarrower` [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sub>3</sub>...]

```
1 NAME
2 NAME
3 inherits: \setupnarrower
```

`\definernote` [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sub>3</sub>...]

```
1 NAME
2 NAME
3 inherits: \setupnote
```

`\defineornament` [<sup>1</sup>...] [<sup>2</sup>...<sub>2</sub>...] [<sup>3</sup>...<sub>3</sub>...]

```
1 NAME
2 alternative = a b
  inherits: \setupcollector
3 style = STYLE COMMAND
  color = COLOR
  inherits: \setupframed
```

`\defineornament` [<sup>1</sup>...] [<sup>2</sup>...<sub>2</sub>...] [<sup>3</sup>...<sub>3</sub>...]

```
1 NAME
2 alternative = a b
  inherits: \setupplayer
3 inherits: \setupplayeredtext
```

`\defineoutputroutine` [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sub>3</sub>...]

```
1 NAME
2 NAME
3 inherits: \setupoutputroutine
```

`\defineoutputroutinecommand` [...,\*...]

```
* KEY
```

`\defineoverlay` [...,<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...]

```
1 NAME
2 NAME
3 COMMAND
```

`\definepage` [<sup>1</sup>...] [<sup>2</sup>...]

```
1 NAME
2 REFERENCE
```

`\definepagebreak` [<sup>1</sup>...] [...,<sup>2</sup>...]

```
1 NAME
2 empty header footer dummy frame NUMBER +NUMBER default reset disable yes no makeup blank preference bigpreference
  left right even odd quadruple last lastpage start stop
```

`\definepagechecker` [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sub>3</sub>...]

```
1 NAME
2 NAME
3 inherits: \setuppagechecker
```

`\definepagecolumns` [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sub>3</sub>...]

```
1 NAME
2 NAME
3 inherits: \setuppagecolumns
```

**\definepageinjection** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME  
2 NAME  
3 inherits: \setuppageinjection

**\definepageinjectionalternative** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...,...]

1 NAME  
2 NAME  
3 inherits: \setuppageinjectionalternative

**\definepageshift** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...]

1 NAME  
2 horizontal vertical  
3 DIMENSION

**\definepagestate** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME  
2 NAME  
3 inherits: \setuppagestate

**\definepairedbox** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME  
2 NAME  
3 inherits: \setuppairedbox

**\definepalet** [<sup>1</sup>...] [...,<sup>2</sup>...,...]

1 NAME  
2 NAME = COLOR

**\definepalet** [<sup>1</sup>...] [<sup>2</sup>...]

1 NAME  
2 NAME

**\definepapersize** [<sup>1</sup>...] [...,<sup>2</sup>...,...]

1 NAME  
2 width = DIMENSION  
height = DIMENSION  
top = COMMAND  
bottom = COMMAND  
left = COMMAND  
right = COMMAND  
distance = DIMENSION  
page = inherits: \setuppapersize  
paper = inherits: \setuppapersize

**\definepapersize** [<sup>1</sup>...] [...,<sup>2</sup>...,...] [<sup>3</sup>...,...]

1 NAME  
2 inherits: \setuppapersize  
3 inherits: \setuppapersize

**\defineparagraph** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME  
2 NAME  
3 inherits: \setupparagraph

**\defineparagraphs** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME  
2 NAME  
3 inherits: \setupparagraphs

**\defineparallel** [<sup>1</sup>...] [...,<sup>2</sup>...,...]

1 NAME  
2 NAME

<pre> \defineparbuilder [...] *   NAME </pre>
<pre> \defineperiodkerning [...] [...] [...] [...] 1   NAME                      OPT          OPT 2   NAME 3   inherits: \setupperiodkerning </pre>
<pre> \defineplacement [...] [...] [...] 1   NAME                      OPT          OPT 2   NAME 3   inherits: \setupplacement </pre>
<pre> \definepositioning [...] [...] [...] 1   NAME                      OPT          OPT 2   NAME 3   inherits: \setuppositioning </pre>
<pre> \defineprefixset [...] [...] [...] 1   NAME SECTIONBLOCK:NAME    OPT 2   SECTION 3   SECTION </pre>
<pre> \defineprocesscolor [...] [...] [...] 1   NAME                      OPT 2   COLOR 3   inherits: \definecolor </pre>
<pre> \defineprocessor [...] [...] [...] 1   NAME                      OPT          OPT 2   NAME 3   inherits: \setupprocessor </pre>
<pre> \defineprofile [...] [...] [...] 1   NAME                      OPT          OPT 2   NAME 3   inherits: \setupprofile </pre>
<pre> \defineprogram [...] [...] [...] 1   NAME                      OPT 2   TEXT 3   TEXT </pre>
<pre> \definepushbutton [...] [...] 1   NAME                      OPT 2   inherits: \setupfieldcontentframed </pre>
<pre> \definepushsymbol [...] [...] 1   NAME 2   n r d </pre>
<pre> \definereference [...] [...] 1   NAME 2   REFERENCE </pre>
<pre> \definereferenceformat [...] [...] [...] 1   NAME                      OPT          OPT 2   NAME 3   inherits: \setupreferenceformat </pre>
<pre> \defineregister [...] [...] [...] 1   NAME                      OPT          OPT 2   NAME 3   inherits: \setupregister </pre>

**\definerenderingwindow** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sup>3</sup>...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuprenderingwindow

**\defineresetset** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...]

1 NAME SECTIONBLOCK:NAME OPT  
2 NUMBER  
3 NUMBER

**\defineruby** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sup>3</sup>...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupruby

**\definescale** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sup>3</sup>...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupscale

**\definescript** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sup>3</sup>...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupscrip

**\definesection** [...]

\* NAME

**\definesectionblock** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sup>3</sup>...]

1 NAME OPT  
2 NAME  
3 inherits: \setupsectionblock

**\definesectionlevels** [<sup>1</sup>...] [<sup>2</sup>...]

1 NAME  
2 SECTION

**\defineselector** [<sup>1</sup>...] [<sup>2</sup>...<sup>2</sup>...]

1 NAME OPT  
2 inherits: \setupselector

**\defineseparatorset** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...]

1 NAME SECTIONBLOCK:NAME OPT  
2 COMMAND PROCESSOR->COMMAND  
3 COMMAND PROCESSOR->COMMAND

**\defineshift** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sup>3</sup>...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupshift

**\definesidebar** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sup>3</sup>...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupsidebar

**\definesort** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...] {<sup>4</sup>...}

1 yes no OPT  
2 SINGULAR  
3 NAME  
4 CONTENT

**\definesorting** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...]

1 SINGULAR OPT  
2 PLURAL  
3 none CSNAME

**\definespotcolor** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME  
2 COLOR  
3 a = NUMBER none normal multiply screen overlay softlight hardlight colordodge colorburn darken lighten difference  
exclusion hue saturation color luminosity  
t = NUMBER  
e = TEXT  
p = NUMBER

**\definestartstop** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupstartstop

**\definestyle** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupstyle

**\definestyleinstance** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...] [<sup>4</sup>...]

1 NAME OPT OPT OPT  
2 rm ss tt mm hw cg  
3 tf bf it sl bi bs sc  
4 COMMAND

**\definesubfield** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...]

1 NAME  
2 NAME  
3 NAME

**\definesubformula** [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupsubformula

**\definesymbol** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...]

1 NAME OPT  
2 NAME  
3 COMMAND

**\definesynonym** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...] {<sup>4</sup>...} {<sup>5</sup>...}

1 yes no OPT  
2 SINGULAR  
3 NAME  
4 TEXT  
5 CONTENT

**\definesynonyms** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...] [<sup>4</sup>...]

1 SINGULAR OPT OPT  
2 PLURAL  
3 CSNAME  
4 CSNAME

**\definesystemattribute** [<sup>1</sup>...] [...,<sup>2</sup>...]

1 NAME OPT  
2 local global public private pickup

**\definesystemconstant** {...}

\* NAME

<pre> \definesystemvariable {...} *   NAME </pre>
<pre> \defineTABLEsetup [...] [...<sup>2</sup>...,...] 1   NAME 2   inherits: \setupTABLE </pre>
<pre> \definetabletemplate [...] [ ... ] [...<sup>3</sup>] [...<sup>4</sup>] 1   NAME 2   TEMPLATE 3   NAME 4   NAME </pre>
<pre> \definetabulate [...] [...<sup>2</sup>] [...<sup>3</sup>/] 1   NAME 2   NAME 3   TEMPLATE </pre>
<pre> \definetabulation [...] [...<sup>2</sup>] [...<sup>3</sup>...,...] 1   NAME 2   NAME 3   inherits: \setuptabulation </pre>
<pre> \definetext [...] [...<sup>2</sup>] [...<sup>3</sup>] [...<sup>4</sup>] [...<sup>5</sup>] [...<sup>6</sup>] [...<sup>7</sup>] 1   NAME 2   top header text footer bottom 3   text margin edge 4   date pagenumber MARK TEXT COMMAND 5   date pagenumber MARK TEXT COMMAND 6   date pagenumber MARK TEXT COMMAND 7   date pagenumber MARK TEXT COMMAND </pre>
<pre> \definetextbackground [...] [...<sup>2</sup>] [...<sup>3</sup>...,...] 1   NAME 2   NAME 3   inherits: \setuptextbackground </pre>
<pre> \definetextflow [...] [...<sup>2</sup>] [...<sup>3</sup>...,...] 1   NAME 2   NAME 3   inherits: \setuptextflow </pre>
<pre> \definetooltip [...] [...<sup>2</sup>] [...<sup>3</sup>...,...] 1   NAME 2   NAME 3   inherits: \setuptooltip </pre>
<pre> \definetransparency [...] [...<sup>2</sup>] 1   NAME 2   NUMBER </pre>
<pre> \definetransparency [...] [...<sup>2</sup>...,...] 1   NAME 2   a = NUMBER none normal multiply screen overlay softlight hardlight colordodge colorburn darken lighten difference         exclusion hue saturation color luminosity         t = NUMBER </pre>
<pre> \definetransparency [...] [...<sup>2</sup>] 1   NAME 2   NAME </pre>
<pre> \definetwopasslist {...} *   NAME </pre>



**\definetype** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sub>=</sub>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuptype

**\definetypeface** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...] [<sup>4</sup>...] [<sup>5</sup>...] [<sup>6</sup>...<sub>=</sub>...,...]

1 NAME OPT OPT  
2 rm ss tt mm hw cg  
3 serif sans mono math handwriting calligraphy  
4 NAME  
5 default dtp  
6 rscale = auto NUMBER  
features = NAME  
fallbacks = NAME  
goodies = NAME  
designsize = auto default  
direction = both

**\definetypescriptprefix** [<sup>1</sup>...] [<sup>2</sup>...]

1 NAME  
2 TEXT

**\definetypescriptsynonym** [<sup>1</sup>...] [<sup>2</sup>...]

1 NAME  
2 TEXT

**\definetyypesetting** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sub>=</sub>...,...]

1 NAME OPT OPT  
2 TEXT  
3 inherits: \setupexternalfigure

**\definetyping** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sub>=</sub>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setuptyping

**\defineunit** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sub>=</sub>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupunit

**\defineviewerlayer** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sub>=</sub>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupviewerlayer

**\definevspace** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...]

1 NAME OPT  
2 NAME  
3 DIMENSION

**\definevspacing** [<sup>1</sup>...] [<sup>2</sup>...]

1 NAME  
2 inherits: \vspacing

**\definevspacingamount** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...]

1 NAME OPT OPT  
2 DIMENSION  
3 DIMENSION

**\definextable** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...<sub>=</sub>...,...]

1 NAME OPT OPT  
2 NAME  
3 inherits: \setupxtable

<code>\delimited [...]<sup>1</sup> [...]<sup>2</sup> {...}<sup>3</sup></code> 1 NAME OPT 2 LANGUAGE 3 CONTENT
<code>\delimitedtext [...]<sup>1</sup> [...]<sup>2</sup> {...}<sup>3</sup></code> 1 NAME OPT 2 LANGUAGE 3 CONTENT
<code>\DELIMITEDTEXT [...]<sup>1</sup> {...}<sup>2</sup></code> 1 LANGUAGE OPT 2 CONTENT instances: quotation quote blockquote speech aside
<code>\aside [...]<sup>1</sup> {...}<sup>2</sup></code> 1 LANGUAGE <sup>OPT</sup> 2 CONTENT
<code>\blockquote [...]<sup>1</sup> {...}<sup>2</sup></code> 1 LANGUAGE OPT 2 CONTENT
<code>\quotation [...]<sup>1</sup> {...}<sup>2</sup></code> 1 LANGUAGE OPT 2 CONTENT
<code>\quote [...]<sup>1</sup> {...}<sup>2</sup></code> 1 LANGUAGE <sup>OPT</sup> 2 CONTENT
<code>\speech [...]<sup>1</sup> {...}<sup>2</sup></code> 1 LANGUAGE <sup>OPT</sup> 2 CONTENT
<code>\depthofstring {...}</code> * TEXT
<code>\depthonlybox {...}</code> * CONTENT
<code>\depthspanningtext {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup></code> 1 TEXT 2 DIMENSION 3 FONT
<code>\depthstrut</code>
<code>\DESCRIPTION [...]<sup>1</sup>,...<sup>2</sup> {...}<sup>3</sup> \par</code> 1 REFERENCE OPT OPT 2 TEXT 3 CONTENT
<code>\determineheadnumber [...]</code> * SECTION
<code>\determinelistcharacteristics [...]<sup>1</sup>,...<sup>2</sup> [...]<sup>2</sup>,...<sup>2</sup>,...]</code> 1 LIST OPT 2 inherits: \setuplist

<p><code>\determinenoflines {...}</code></p> <p>* CONTENT</p>
<p><code>\determineregistercharacteristics [...]<sup>1</sup> [...,...<sup>2</sup>...,...]</code></p> <p>1 NAME <small>OPT</small></p> <p>2 language = default DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-sc9 LANGUAGE</p> <p>method = default before after first last ch mm zm pm mc zc pc uc</p> <p>numberorder = <u>numbers</u></p> <p>compress = yes <u>no</u> all</p> <p>criterion = local text current previous <u>all</u> SECTION</p>
<p><code>\devanagarinumerals {...}</code></p> <p>* NUMBER</p>
<p><code>\digits {...}</code></p> <p>* NUMBER</p>
<p><code>\digits ...</code></p> <p>* NUMBER</p>
<p><code>\dimensiontocount {...}<sup>1</sup> \...<sup>2</sup></code></p> <p>1 DIMENSION</p> <p>2 CSNAME</p>
<p><code>\directboxfromcache {...}<sup>1</sup> {...}<sup>2</sup></code></p> <p>1 NAME</p> <p>2 NUMBER TEXT</p>
<p><code>\directcolor [...]</code></p> <p>* COLOR</p>
<p><code>\directcolored [...,...<sup>*</sup>...,...]</code></p> <p>* inherits: \definecolor</p>
<p><code>\directcolored [...]</code></p> <p>* COLOR</p>
<p><code>\directconvertedcounter {...}<sup>1</sup> {...}<sup>2</sup></code></p> <p>1 NAME</p> <p>2 first previous next last number</p>
<p><code>\directcopyboxfromcache {...}<sup>1</sup> {...}<sup>2</sup></code></p> <p>1 NAME</p> <p>2 NUMBER TEXT</p>
<p><code>\directdummyparameter {...}</code></p> <p>* KEY</p>
<p><code>\directgetboxllx ...</code></p> <p>* CSNAME NUMBER</p>
<p><code>\directgetboxlly ...</code></p> <p>* CSNAME NUMBER</p>
<p><code>\directhighlight {...}<sup>1</sup> {...}<sup>2</sup></code></p> <p>1 NAME</p> <p>2 TEXT</p>

$\backslash\mathrm{directlocalframed}$ [ <sup>1</sup> ...] { <sup>2</sup> ...} 1 NAME 2 CONTENT
$\backslash\mathrm{directluacode}$ {...} * COMMAND
$\backslash\mathrm{directselect}$ { <sup>1</sup> ...} { <sup>2</sup> ...} { <sup>3</sup> ...} { <sup>4</sup> ...} { <sup>5</sup> ...} { <sup>6</sup> ...} 1 NAME OPT OPT OPT OPT OPT 2 CONTENT 3 CONTENT 4 CONTENT 5 CONTENT 6 CONTENT
$\backslash\mathrm{directsetbar}$ {...} * NAME
$\backslash\mathrm{directsetup}$ {...} * NAME
$\backslash\mathrm{directsymbol}$ { <sup>1</sup> ...} { <sup>2</sup> ...} 1 NAME 2 NAME
$\backslash\mathrm{directvspacing}$ {...,*...} * inherits: $\backslash\mathrm{vspacing}$
$\backslash\mathrm{dis}$ {...} * CONTENT
$\backslash\mathrm{disabledirectives}$ [...,*...] * NAME
$\backslash\mathrm{disableexperiments}$ [...,*...] * NAME
$\backslash\mathrm{disablemode}$ [...,*...] * NAME
$\backslash\mathrm{disableoutputstream}$
$\backslash\mathrm{disableparpositions}$
$\backslash\mathrm{disableregime}$
$\backslash\mathrm{disabletrackers}$ [...,*...] * NAME
$\backslash\mathrm{displaymath}$ {...} * CONTENT
$\backslash\mathrm{displaymathematics}$ {...} * CONTENT
$\backslash\mathrm{displaymessage}$ {...} * TEXT

`\distributedhsize {...} {...} {...}`

1 DIMENSION  
2 DIMENSION  
3 NUMBER

`\dividedsize {...} {...} {...}`

1 DIMENSION  
2 DIMENSION  
3 NUMBER

`\doadaptleftskip {...}`

\* yes no standard DIMENSION

`\doadaptrightskip {...}`

\* yes no standard DIMENSION

`\doaddfeature {...,*...}`

\* NAME

`\doassign [...] [...2...]`

1 TEXT  
2 KEY = VALUE

`\doassignempty [...] [...2...]`

1 TEXT  
2 KEY = VALUE

`\doboundtext {...} {...2} {...3}`

1 TEXT  
2 DIMENSION  
3 COMMAND

`\docheckassignment {...}`

\* TEXT

`\docheckedpagestate {...} {...2} {...3} {...4} {...5} {...6} {...7}`

1 REFERENCE  
2 COMMAND  
3 COMMAND  
4 COMMAND  
5 COMMAND  
6 COMMAND  
7 COMMAND

`\docheckedpair {...,*...}`

\* TEXT

`\documentvariable {...}`

\* KEY

`\dodoubleargument \... [...2] [...3]`

1 CSNAME  
2 TEXT  
3 TEXT

`\dodoubleargumentwithset \... [...2,...] [...3]`

1 CSNAME  
2 TEXT  
3 TEXT

\dodoubleempty \<sup>1</sup>... [<sup>2</sup>...] [<sup>3</sup>...]

1 CSNAME OPT OPT  
2 TEXT  
3 TEXT

\dodoubleemptywithset \<sup>1</sup>... [<sup>2</sup>...,...] [<sup>3</sup>...]

1 CSNAME OPT OPT  
2 TEXT  
3 TEXT

\dodoublegroupempty \<sup>1</sup>... {<sup>2</sup>...} {<sup>3</sup>...}

1 CSNAME OPT OPT  
2 TEXT  
3 TEXT

\doeassign [<sup>1</sup>...] [<sup>2</sup>...]

1 TEXT  
2 KEY = VALUE

\doexpandedrecurse {<sup>1</sup>...} {<sup>2</sup>...}

1 NUMBER  
2 COMMAND

\dofastloopcs {<sup>1</sup>...} \<sup>2</sup>...

1 NUMBER  
2 CSNAME

\dogetattribute {<sup>\*</sup>...}

\* NAME

\dogetattributeid {<sup>\*</sup>...}

\* NAME

\dogetcommacommandelement <sup>1</sup>... \from <sup>2</sup>... \to \<sup>3</sup>...

1 NUMBER  
2 TEXT  
3 CSNAME

\dogobbledoubleempty [<sup>1</sup>...] [<sup>2</sup>...]

1 TEXT OPT OPT  
2 TEXT

\dogobblesingleempty [<sup>\*</sup>...]

\* TEXT OPT

\doif {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}

1 CONTENT  
2 CONTENT  
3 TRUE

\doifallcommon {...,<sup>1</sup>...} {...,<sup>2</sup>...} {<sup>3</sup>...}

1 TEXT  
2 TEXT  
3 TRUE

\doifallcommonelse {...,<sup>1</sup>...} {...,<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...}

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

`\doifalldefinedelse {...1,...} {...2} {...3}`

1 NAME  
2 TRUE  
3 FALSE

`\doifallmodes {...1,...} {...2} {...3}`

1 NAME  
2 TRUE  
3 FALSE

`\doifallmodeselse {...1,...} {...2} {...3}`

1 NAME  
2 TRUE  
3 FALSE

`\doifassignmentelse {...1} {...2} {...3}`

1 TEXT  
2 TRUE  
3 FALSE

`\doifblackelse {...1} {...2} {...3}`

1 COLOR  
2 TRUE  
3 FALSE

`\doifbothsides {...1} {...2} {...3}`

1 COMMAND  
2 COMMAND  
3 COMMAND

`\doifbothsidesoverruled {...1} {...2} {...3}`

1 COMMAND  
2 COMMAND  
3 COMMAND

`\doifboxelse {...1} {...2} {...3} {...4}`

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

`\doifbufferelse {...1} {...2} {...3}`

1 BUFFER  
2 TRUE  
3 FALSE

`\doifcolor {...1} {...2}`

1 COLOR  
2 TRUE

`\doifcolorelse {...1} {...2} {...3}`

1 COLOR  
2 TRUE  
3 FALSE

`\doifcommandhandler \... {...2} {...3}`

1 CSNAME  
2 NAME  
3 TRUE

`\doifcommandhandlerelse \... {...2} {...3} {...4}`

1 CSNAME  
2 NAME  
3 TRUE  
4 FALSE

`\doifcommon {...1,...} {...2,...} {...3}`

1 TEXT  
2 TEXT  
3 TRUE

`\doifcommonelse {...1,...} {...2,...} {...3} {...4}`

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

`\doifcontent {...1} {...2} {...3} \... {...5}`

1 COMMAND  
2 COMMAND  
3 COMMAND  
4 CSNAME  
5 CONTENT

`\doifconversiondefinedelse {...1} {...2} {...3}`

1 NAME  
2 TRUE  
3 FALSE

`\doifconversionnumberelse {...1} {...2} {...3} {...4}`

1 NAME  
2 NUMBER  
3 TRUE  
4 FALSE

`\doifcounter {...1} {...2}`

1 NAME  
2 TRUE

`\doifcounterelse {...1} {...2} {...3}`

1 NAME  
2 TRUE  
3 FALSE

`\doifcurrentfonthasfeatureelse {...1} {...2} {...3}`

1 NAME  
2 TRUE  
3 FALSE

`\doifdefined {...1} {...2}`

1 NAME  
2 TRUE

`\doifdefinedcounter {...1} {...2}`

1 NAME  
2 TRUE

`\doifdefinedcounterelse {...1} {...2} {...3}`

1 NAME  
2 TRUE  
3 FALSE

`\doifdefinedelse {...1} {...2} {...3}`

1 NAME  
2 TRUE  
3 FALSE

`\doifdimensionelse {...1} {...2} {...3}`

1 TEXT  
2 TRUE  
3 FALSE



`\doifdimenstringelse {...} {...} {...}`

1 TEXT  
2 TRUE  
3 FALSE

`\doifdocumentargument {...} {...}`

1 NAME  
2 TRUE

`\doifdocumentargumentelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifdocumentfilename {...} {...}`

1 NUMBER  
2 TRUE

`\doifdocumentfilenameelse {...} {...} {...}`

1 NUMBER  
2 TRUE  
3 FALSE

`\doifdrawingblackelse {...} {...}`

1 TRUE  
2 FALSE

`\doifelse {...} {...} {...} {...}`

1 CONTENT  
2 CONTENT  
3 TRUE  
4 FALSE

`\doifelseallcommon {...,1...} {...,2...} {...} {...4}`

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

`\doifelsealldefined {...,1...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelseallmodes {...,1...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelseassignment {...} {...} {...}`

1 TEXT  
2 TRUE  
3 FALSE

`\doifelseblack {...} {...} {...}`

1 COLOR  
2 TRUE  
3 FALSE

`\doifelsebox {...} {...} {...} {...}`

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

```
\doifelseboxincache {...} {...} {...} {...}
1 NAME
2 NUMBER TEXT
3 TRUE
4 FALSE
```

```
\doifelsebuffer {...} {...} {...}
1 BUFFER
2 TRUE
3 FALSE
```

```
\doifelsecolor {...} {...} {...}
1 COLOR
2 TRUE
3 FALSE
```

```
\doifelsecommandhandler \... {...} {...} {...}
1 CSNAME
2 NAME
3 TRUE
4 FALSE
```

```
\doifelsecommon {...,1...} {...,2...} {...} {...4}
1 TEXT
2 TEXT
3 TRUE
4 FALSE
```

```
\doifelseconversiondefined {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

```
\doifelseconversionnumber {...} {...} {...} {...4}
1 NAME
2 NUMBER
3 TRUE
4 FALSE
```

```
\doifelsecounter {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

```
\doifelsecurrentfonthasfeature {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

```
\doifelsecurrentsortingtonused {...} {...}
1 TRUE
2 FALSE
```

```
\doifelsecurrentsynonymshown {...} {...}
1 TRUE
2 FALSE
```

```
\doifelsecurrentsynonymused {...} {...}
1 TRUE
2 FALSE
```

```
\doifelsedefined {...} {...} {...}
1 NAME
2 TRUE
3 FALSE
```

`\doifelsedefinedcounter {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsedimension {...} {...} {...}`

1 TEXT  
2 TRUE  
3 FALSE

`\doifelsedimenstring {...} {...} {...}`

1 TEXT  
2 TRUE  
3 FALSE

`\doifelsedocumentargument {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsedocumentfilename {...} {...} {...}`

1 NUMBER  
2 TRUE  
3 FALSE

`\doifelsedrawingblack {...} {...}`

1 TRUE  
2 FALSE

`\doifelseempty {...} {...} {...}`

1 CONTENT  
2 TRUE  
3 FALSE

`\doifelseemptyvalue {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelseemptyvariable {...} {...} {...} {...}`

1 NAME  
2 KEY  
3 TRUE  
4 FALSE

`\doifelseenv {...} {...} {...}`

1 KEY  
2 TRUE  
3 FALSE

`\doifelsefastoptionalcheck {...} {...}`

1 TRUE  
2 FALSE

`\doifelsefastoptionalcheckcs \^1 \^2`

1 CSNAME  
2 CSNAME

`\doifelsefieldbody {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsefieldcategory {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsefigure {...} {...} {...}`

1 FILE  
2 TRUE  
3 FALSE

`\doifelsefile {...} {...} {...}`

1 FILE  
2 TRUE  
3 FALSE

`\doifelsefiledefined {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsefileexists {...} {...} {...}`

1 FILE  
2 TRUE  
3 FALSE

`\doifelsefirstchar {...} {...} {...} {...}`

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

`\doifelseflagged {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsefontchar {...} {...} {...} {...}`

1 FONT  
2 NUMBER  
3 TRUE  
4 FALSE

`\doifelsefontfeature {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsefontpresent {...} {...} {...}`

1 FONT  
2 TRUE  
3 FALSE

`\doifelsefontsynonym {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsehasspace {...} {...} {...}`

1 TEXT  
2 TRUE  
3 FALSE

`\doifelsehelp {...} {...}`

1 TRUE  
2 FALSE

**\doifelseinbyname** {...} {...} {...} {...}

1 TEXT  
2 CSNAME  
3 TRUE  
4 FALSE

**\doifelseinelement** {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

**\doifelseinputfile** {...} {...} {...}

1 FILE  
2 TRUE  
3 FALSE

**\doifelseinsertion** {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

**\doifelseinset** {...} {...<sup>2</sup>,...} {...} {...<sup>4</sup>}

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

**\doifelseinstring** {...} {...} {...} {...}

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

**\doifelseinsymbolset** {...} {...} {...} {...}

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

**\doifelseintoks** {...} {...} {...} {...}

1 COMMAND  
2 COMMAND  
3 TRUE  
4 FALSE

**\doifelseintwopassdata** {...} {...} {...} {...}

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

**\doifelseitalic** {...} {...}

1 TRUE  
2 FALSE

**\doifelselanguage** {...} {...} {...}

1 LANGUAGE  
2 TRUE  
3 FALSE

**\doifelselayerdata** {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelselayoutdefined {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelselayoutsomeline {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelselayouttextline {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelseleapyear {...} {...} {...}

1 NUMBER  
2 TRUE  
3 FALSE

\doifelselist {...} {...} {...}

1 LIST  
2 TRUE  
3 FALSE

\doifelselocation {...} {...}

1 TRUE  
2 FALSE

\doifelselocfile {...} {...} {...}

1 FILE  
2 TRUE  
3 FALSE

\doifelseMPgraphic {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsemainfloatbody {...} {...}

1 TRUE  
2 FALSE

\doifelsemarkedpage {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsemarking {...} {...} {...}

1 MARK  
2 TRUE  
3 FALSE

\doifelsemeaning \^1... \^2... {...} {...}

1 CSNAME  
2 CSNAME  
3 TRUE  
4 FALSE

\doifelsemessage {...} {...} {...} {...}

1 NAME  
2 NAME NUMBER  
3 TRUE  
4 FALSE

`\doifelsemode {...1,...} {...2} {...3}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsenextbgroup {...1} {...2}`

1 TRUE  
2 FALSE

`\doifelsenextbgroupcs \...1 \...2..`

1 CSNAME  
2 CSNAME

`\doifelsenextchar {...1} {...2} {...3}`

1 CHARACTER  
2 TRUE  
3 FALSE

`\doifelsenextoptional {...1} {...2}`

1 TRUE  
2 FALSE

`\doifelsenextoptionalcs \...1 \...2..`

1 CSNAME  
2 CSNAME

`\doifelsenextparenthesis {...1} {...2}`

1 TRUE  
2 FALSE

`\doifelsenonzeropositive {...1} {...2} {...3}`

1 NUMBER  
2 TRUE  
3 FALSE

`\doifelsenoteonsamepage {...1} {...2} {...3}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsenothing {...1} {...2} {...3}`

1 TEXT  
2 TRUE  
3 FALSE

`\doifelsenumber {...1} {...2} {...3}`

1 TEXT  
2 TRUE  
3 FALSE

`\doifelseobjectfound {...1} {...2} {...3} {...4}`

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

`\doifelseobjectreferencefound {...1} {...2} {...3} {...4}`

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

\doifelseoddpage {...} {...}

1 COMMAND  
2 COMMAND

\doifelseoddpagefloat {...} {...}

1 TRUE  
2 FALSE

\doifelseoldercontext {...} {...} {...}

1 NUMBER  
2 TRUE  
3 FALSE

\doifelseolderversion {...} {...} {...} {...}

1 NUMBER  
2 NUMBER  
3 TRUE  
4 FALSE

\doifelseoverlapping {...} {...} {...} {...}

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

\doifelseoverlay {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelseparallel {...} {...,<sup>2</sup>...} {...} {...}

1 NAME  
2 NAME all  
3 TRUE  
4 FALSE

\doifelseparentfile {...} {...} {...}

1 FILE  
2 TRUE  
3 FALSE

\doifelsepath {...} {...} {...}

1 PATH  
2 TRUE  
3 FALSE

\doifelsepathexists {...} {...} {...}

1 PATH  
2 TRUE  
3 FALSE

\doifelsepatterns {...} {...} {...}

1 LANGUAGE  
2 TRUE  
3 FALSE

\doifelseposition {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsepositionaction {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE



\doifelsepositiononpage {...} {...} {...} {...}

1 NAME  
2 NUMBER  
3 TRUE  
4 FALSE

\doifelsepositionsonsamepage {...,<sup>1</sup>...} {...<sup>2</sup>} {...<sup>3</sup>}

1 NAME  
2 TRUE  
3 FALSE

\doifelsepositionsonthispage {...,<sup>1</sup>...} {...<sup>2</sup>} {...<sup>3</sup>}

1 NAME  
2 TRUE  
3 FALSE

\doifelsepositionsused {...<sup>1</sup>} {...<sup>2</sup>}

1 TRUE  
2 FALSE

\doifelserreferencefound {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>}

1 REFERENCE  
2 TRUE  
3 FALSE

\doifelserrightpage {...<sup>1</sup>} {...<sup>2</sup>}

1 TRUE  
2 FALSE

\doifelserrightpagefloat {...<sup>1</sup>} {...<sup>2</sup>}

1 TRUE  
2 FALSE

\doifelserrighttoleftinbox ...<sup>1</sup> {...<sup>2</sup>} {...<sup>3</sup>}

1 CSNAME NUMBER  
2 TRUE  
3 FALSE

\doifelsesamelinereference {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>}

1 REFERENCE  
2 TRUE  
3 FALSE

\doifelsesamestring {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>} {...<sup>4</sup>}

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

\doifelsesetups {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>}

1 NAME  
2 TRUE  
3 FALSE

\doifelsesomebackground {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>}

1 NAME  
2 TRUE  
3 FALSE

\doifelsesomespace {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>}

1 TEXT  
2 TRUE  
3 FALSE

\doifelsesomething {...} {...} {...}

1 TEXT  
2 TRUE  
3 FALSE

\doifelsesometoks \... {...} {...}

1 CSNAME  
2 TRUE  
3 FALSE

\doifelsestringinstring {...} {...} {...} {...}

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

\doifelsestructurelisthasnumber {...} {...}

1 TRUE  
2 FALSE

\doifelsestructurelisthaspage {...} {...}

1 TRUE  
2 FALSE

\doifelsesymboldefined {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsesymbolset {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsetext {...} {...} {...}

1 TEXT  
2 TRUE  
3 FALSE

\doifelsetextflow {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsetextflowcollector {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifelsetopofpage {...} {...}

1 TRUE  
2 FALSE

\doifelsetypingfile {...} {...} {...}

1 FILE  
2 TRUE  
3 FALSE

\doifelseundefined {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

`\doifelseurldefined {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsevalue {...} {...} {...} {...}`

1 NAME  
2 TEXT  
3 TRUE  
4 FALSE

`\doifelsevaluenothing {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifelsevariable {...} {...} {...} {...}`

1 NAME  
2 KEY  
3 TRUE  
4 FALSE

`\doifempty {...} {...}`

1 CONTENT  
2 TRUE

`\doifemptyelse {...} {...} {...}`

1 CONTENT  
2 TRUE  
3 FALSE

`\doifemptytoks \^1. {...}`

1 CSNAME  
2 TRUE

`\doifemptyvalue {...} {...}`

1 NAME  
2 TRUE

`\doifemptyvalueelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifemptyvariable {...} {...} {...}`

1 NAME  
2 KEY  
3 TRUE

`\doifemptyvariableelse {...} {...} {...} {...}`

1 NAME  
2 KEY  
3 TRUE  
4 FALSE

`\doifenv {...} {...}`

1 KEY  
2 TRUE

`\doifenvelse {...} {...} {...}`

1 KEY  
2 TRUE  
3 FALSE

`\doiffastoptionalcheckcselse \1... \2...`

1 CSNAME  
2 CSNAME

`\doiffastoptionalcheckelse {1...} {2...}`

1 TRUE  
2 FALSE

`\doiffieldbodyelse {1...} {2...} {3...}`

1 NAME  
2 TRUE  
3 FALSE

`\doiffieldcategoryelse {1...} {2...} {3...}`

1 NAME  
2 TRUE  
3 FALSE

`\doiffigureelse {1...} {2...} {3...}`

1 FILE  
2 TRUE  
3 FALSE

`\doiffile {1...} {2...}`

1 FILE  
2 TRUE

`\doiffiledefinedelse {1...} {2...} {3...}`

1 NAME  
2 TRUE  
3 FALSE

`\doiffileelse {1...} {2...} {3...}`

1 FILE  
2 TRUE  
3 FALSE

`\doiffileexistselse {1...} {2...} {3...}`

1 FILE  
2 TRUE  
3 FALSE

`\doiffirstcharelse {1...} {2...} {3...} {4...}`

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

`\doifflaggedelse {1...} {2...} {3...}`

1 NAME  
2 TRUE  
3 FALSE

`\doiffontcharelse {1...} {2...} {3...} {4...}`

1 FONT  
2 NUMBER  
3 TRUE  
4 FALSE

`\doiffontfeatureelse {1...} {2...} {3...}`

1 NAME  
2 TRUE  
3 FALSE

**\doiffontpresentelse** {...} {...} {...}

1 FONT  
2 TRUE  
3 FALSE

**\doiffontsynonymelse** {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

**\doifhasspaceelse** {...} {...} {...}

1 TEXT  
2 TRUE  
3 FALSE

**\doifhelpelse** {...} {...}

1 TRUE  
2 FALSE

**\doifincsnameelse** {...} {...} {...} {...}

1 TEXT  
2 CSNAME  
3 TRUE  
4 FALSE

**\doifinelementelse** {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

**\doifinputfileelse** {...} {...} {...}

1 FILE  
2 TRUE  
3 FALSE

**\doifinsertionelse** {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

**\doifinset** {...} {...,<sup>2</sup>...} {...}

1 TEXT  
2 TEXT  
3 TRUE

**\doifinsetelse** {...} {...,<sup>2</sup>...} {...} {...}

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

**\doifinstring** {...} {...} {...}

1 TEXT  
2 TEXT  
3 TRUE

**\doifinstringelse** {...} {...} {...} {...}

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

\doifinsymbolset {...} {...} {...} {...}

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

\doifinsymbolsetelse {...} {...} {...} {...}

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

\doifintokselset {...} {...} {...} {...}

1 COMMAND  
2 COMMAND  
3 TRUE  
4 FALSE

\doifintwopassdataelse {...} {...} {...} {...}

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

\doifitalicelse {...} {...}

1 TRUE  
2 FALSE

\doiflanguageelse {...} {...} {...}

1 LANGUAGE  
2 TRUE  
3 FALSE

\doiflayerdataelse {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doiflayoutdefinedelse {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doiflayoutsomelineelse {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doiflayouttextlineelse {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifleapyearelse {...} {...} {...}

1 NUMBER  
2 TRUE  
3 FALSE

\doiflistelse {...} {...} {...}

1 LIST  
2 TRUE  
3 FALSE

<pre> \doiflocationelse {...} {...} 1  TRUE 2  FALSE </pre>
<pre> \doiflocfileelse {...} {...} {...} 1  FILE 2  TRUE 3  FALSE </pre>
<pre> \doifMPgraphicelse {...} {...} {...} 1  NAME 2  TRUE 3  FALSE </pre>
<pre> \doifmainfloatbodyelse {...} {...} 1  TRUE 2  FALSE </pre>
<pre> \doifmarkingelse {...} {...} {...} 1  MARK 2  TRUE 3  FALSE </pre>
<pre> \doifmeaningelse \... \... {...} {...} 1  CSNAME 2  CSNAME 3  TRUE 4  FALSE </pre>
<pre> \doifmessageelse {...} {...} {...} {...} 1  NAME 2  NAME NUMBER 3  TRUE 4  FALSE </pre>
<pre> \doifmode {...,<sup>1</sup>...} {...<sup>2</sup>} 1  NAME 2  TRUE </pre>
<pre> \doifmodeelse {...,<sup>1</sup>...} {...<sup>2</sup>} {...<sup>3</sup>} 1  NAME 2  TRUE 3  FALSE </pre>
<pre> \doifnextbgroupcselse \... \...<sup>1</sup> 1  CSNAME 2  CSNAME </pre>
<pre> \doifnextbgroupelse {...<sup>1</sup>} {...<sup>2</sup>} 1  TRUE 2  FALSE </pre>
<pre> \doifnextcharelse {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>} 1  CHARACTER 2  TRUE 3  FALSE </pre>
<pre> \doifnextoptionalcselse \... \...<sup>1</sup> 1  CSNAME 2  CSNAME </pre>
<pre> \doifnextoptionalelse {...<sup>1</sup>} {...<sup>2</sup>} 1  TRUE 2  FALSE </pre>

`\doifnextparenthesiselse {...} {...}`

1 TRUE  
2 FALSE

`\doifnonzeropositiveelse {...} {...} {...}`

1 NUMBER  
2 TRUE  
3 FALSE

`\doifnot {...} {...} {...}`

1 CONTENT  
2 CONTENT  
3 TRUE

`\doifnotallcommon {...,1...} {...,2...} {...3}`

1 TEXT  
2 TEXT  
3 TRUE

`\doifnotallmodes {...,1...} {...2} {...3}`

1 NAME  
2 TRUE  
3 FALSE

`\doifnotcommandhandler \... {...} {...}`

1 CSNAME  
2 NAME  
3 TRUE

`\doifnotcommon {...,1...} {...,2...} {...3}`

1 TEXT  
2 TEXT  
3 TRUE

`\doifnotcounter {...} {...}`

1 NAME  
2 TRUE

`\doifnotdocumentargument {...} {...}`

1 NAME  
2 TRUE

`\doifnotdocumentfilename {...} {...}`

1 NUMBER  
2 TRUE

`\doifnotempty {...} {...}`

1 CONTENT  
2 TRUE

`\doifnotemptyvalue {...} {...}`

1 NAME  
2 TRUE

`\doifnotemptyvariable {...} {...} {...}`

1 NAME  
2 KEY  
3 TRUE

`\doifnotenv {...} {...}`

1 KEY  
2 TRUE



\doifnoteonsamepageelse {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifnotescollected {...} {...}

1 NAME  
2 TRUE

\doifnotfile {...} {...}

1 FILE  
2 TRUE

\doifnotflagged {...} {...}

1 NAME  
2 TRUE

\doifnothing {...} {...}

1 TEXT  
2 TRUE

\doifnothingelse {...} {...} {...}

1 TEXT  
2 TRUE  
3 FALSE

\doifnotinset {...} {...,  
...} {...}

1 TEXT  
2 TEXT  
3 TRUE

\doifnotinshadesplitfloat {...}

\* TRUE

\doifnotinstring {...} {...} {...}

1 TEXT  
2 TEXT  
3 TRUE

\doifnotmode {...,  
...} {...}

1 NAME  
2 TRUE

\doifnotnumber {...} {...}

1 TEXT  
2 TRUE

\doifnotsamestring {...} {...} {...}

1 TEXT  
2 TEXT  
3 TRUE

\doifnotsetups {...} {...}

1 NAME  
2 TRUE

\doifnotvalue {...} {...} {...}

1 NAME  
2 TEXT  
3 TRUE

`\doifnotvariable {...} {...} {...}`

1 NAME  
2 KEY  
3 TRUE

`\doifnumber {...} {...}`

1 TEXT  
2 TRUE

`\doifnumberelse {...} {...} {...}`

1 TEXT  
2 TRUE  
3 FALSE

`\doifobjectfoundelse {...} {...} {...} {...}`

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

`\doifobjectreferencefoundelse {...} {...} {...} {...}`

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

`\doifoddpagelse {...} {...}`

1 COMMAND  
2 COMMAND

`\doifoddpagefloatelse {...} {...}`

1 TRUE  
2 FALSE

`\doifoldercontextelse {...} {...} {...}`

1 NUMBER  
2 TRUE  
3 FALSE

`\doifolderversionelse {...} {...} {...} {...}`

1 NUMBER  
2 NUMBER  
3 TRUE  
4 FALSE

`\doifoverlappingelse {...} {...} {...} {...}`

1 NAME  
2 NAME  
3 TRUE  
4 FALSE

`\doifoverlayelse {...} {...} {...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifparallelelse {...} {...,2...} {...} {...}`

1 NAME  
2 NAME all  
3 TRUE  
4 FALSE

\doifparentfileelse {...} {...} {...}

1 FILE  
2 TRUE  
3 FALSE

\doifpathelse {...} {...} {...}

1 PATH  
2 TRUE  
3 FALSE

\doifpathexistselse {...} {...} {...}

1 PATH  
2 TRUE  
3 FALSE

\doifpatternselse {...} {...} {...}

1 LANGUAGE  
2 TRUE  
3 FALSE

\doifposition {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifpositionaction {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifpositionactionelse {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifpositionelse {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifpositiononpageelse {...} {...} {...} {...}

1 NAME  
2 NUMBER  
3 TRUE  
4 FALSE

\doifpositionsonsamepageelse {...,<sup>1</sup>...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifpositionsonthispageelse {...,<sup>1</sup>...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifpositionsusedelse {...} {...}

1 TRUE  
2 FALSE

\doifreferencefoundelse {...} {...} {...}

1 REFERENCE  
2 TRUE  
3 FALSE

\doifrightpagefloatelse {...} {...}

1 TRUE  
2 FALSE

\doifrighttoleftinboxelse ... {...} {...}

1 CSNAME NUMBER  
2 TRUE  
3 FALSE

\doifsamelinereferenceelse {...} {...} {...}

1 REFERENCE  
2 TRUE  
3 FALSE

\doifsamestring {...} {...} {...}

1 TEXT  
2 TEXT  
3 TRUE

\doifsamestringelse {...} {...} {...} {...}

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

\doifsetups {...} {...}

1 NAME  
2 TRUE

\doifsetupselfelse {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifsomebackground {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifsomebackgroundelse {...} {...} {...}

1 NAME  
2 TRUE  
3 FALSE

\doifsomespaceelse {...} {...} {...}

1 TEXT  
2 TRUE  
3 FALSE

\doifsomething {...} {...}

1 TEXT  
2 TRUE

\doifsomethingelse {...} {...} {...}

1 TEXT  
2 TRUE  
3 FALSE

\doifsometoks \... {...}

1 CSNAME  
2 TRUE

`\doifsometokselsetelse \1... {\2...} {\3...}`

1 CSNAME  
2 TRUE  
3 FALSE

`\doifstringinstringelse {\1...} {\2...} {\3...} {\4...}`

1 TEXT  
2 TEXT  
3 TRUE  
4 FALSE

`\doifstructurelisthasnumberelse {\1...} {\2...}`

1 TRUE  
2 FALSE

`\doifstructurelisthaspageelse {\1...} {\2...}`

1 TRUE  
2 FALSE

`\doifsymboldefinedelse {\1...} {\2...} {\3...}`

1 NAME  
2 TRUE  
3 FALSE

`\doifsymbolsetelse {\1...} {\2...} {\3...}`

1 NAME  
2 TRUE  
3 FALSE

`\doiftext {\1...} {\2...} {\3...}`

1 TEXT  
2 TRUE  
3 FALSE

`\doiftextelse {\1...} {\2...} {\3...}`

1 TEXT  
2 TRUE  
3 FALSE

`\doiftextflowcollectorelse {\1...} {\2...} {\3...}`

1 NAME  
2 TRUE  
3 FALSE

`\doiftextflowelse {\1...} {\2...} {\3...}`

1 NAME  
2 TRUE  
3 FALSE

`\doiftopofpageelse {\1...} {\2...}`

1 TRUE  
2 FALSE

`\doiftypingfileelse {\1...} {\2...} {\3...}`

1 FILE  
2 TRUE  
3 FALSE

`\doifundefined {\1...} {\2...}`

1 NAME  
2 TRUE

<pre> \doifundefinedcounter {...} {...} 1  NAME 2  TRUE </pre>
<pre> \doifundefinedelse {...} {...} {...} 1  NAME 2  TRUE 3  FALSE </pre>
<pre> \doifunknownfontfeature {...} {...} {...} 1  NAME 2  TRUE 3  FALSE </pre>
<pre> \doifurldefinedelse {...} {...} {...} 1  NAME 2  TRUE 3  FALSE </pre>
<pre> \doifvalue {...} {...} {...} 1  NAME 2  TEXT 3  TRUE </pre>
<pre> \doifvalueelse {...} {...} {...} {...} 1  NAME 2  TEXT 3  TRUE 4  FALSE </pre>
<pre> \doifvaluenothing {...} {...} 1  NAME 2  TRUE </pre>
<pre> \doifvaluenothingelse {...} {...} {...} 1  NAME 2  TRUE 3  FALSE </pre>
<pre> \doifvaluesomething {...} {...} 1  NAME 2  TRUE </pre>
<pre> \doifvariable {...} {...} {...} 1  NAME 2  KEY 3  TRUE </pre>
<pre> \doifvariableelse {...} {...} {...} {...} 1  NAME 2  KEY 3  TRUE 4  FALSE </pre>
<pre> \doindentation </pre>
<pre> \dollar </pre>
<pre> \doloop {...} *  COMMAND </pre>

<code>\doloopoverlist {...,<sup>1</sup>...} {...<sup>2</sup>}</code> 1    TEXT 2    COMMAND
<code>\donothing</code>
<code>\dontconvertfont</code>
<code>\dontleavehmode</code>
<code>\dontpermitspacesbetweenengroups</code>
<code>\dopositionaction {...}</code> *    NAME
<code>\doprocesslocalsetups {...,*...}</code> *    NAME
<code>\doquadrupleargument \<sup>1</sup>... [<sup>2</sup>...] [<sup>3</sup>...] [<sup>4</sup>...] [<sup>5</sup>...]</code> 1    CSNAME 2    TEXT 3    TEXT 4    TEXT 5    TEXT
<code>\doquadrupleempty \<sup>1</sup>... [<sup>2</sup>...] [<sup>3</sup>...] [<sup>4</sup>...] [<sup>5</sup>...]</code> 1    CSNAME 2    TEXT 3    TEXT 4    TEXT 5    TEXT
<code>\doquadruplegroupempty \<sup>1</sup>... {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...} {<sup>5</sup>...}</code> 1    CSNAME 2    TEXT 3    TEXT 4    TEXT 5    TEXT
<code>\doquintupleargument \<sup>1</sup>... [<sup>2</sup>...] [<sup>3</sup>...] [<sup>4</sup>...] [<sup>5</sup>...] [<sup>6</sup>...]</code> 1    CSNAME 2    TEXT 3    TEXT 4    TEXT 5    TEXT 6    TEXT
<code>\doquintupleempty \<sup>1</sup>... [<sup>2</sup>...] [<sup>3</sup>...] [<sup>4</sup>...] [<sup>5</sup>...] [<sup>6</sup>...]</code> 1    CSNAME 2    TEXT 3    TEXT 4    TEXT 5    TEXT 6    TEXT
<code>\doquintuplegroupempty \<sup>1</sup>... {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...} {<sup>5</sup>...} {<sup>6</sup>...}</code> 1    CSNAME 2    TEXT 3    TEXT 4    TEXT 5    TEXT 6    TEXT
<code>\dorechecknextindentation</code>

<p><code>\dorecurse {<sup>1</sup>...} {<sup>2</sup>...}</code></p> <p>1    NUMBER</p> <p>2    COMMAND</p>
<p><code>\dorepeatwithcommand [<sup>1</sup>...] \<sup>2</sup>...</code></p> <p>1    TEXT   NUMBER*TEXT</p> <p>2    CSNAME</p>
<p><code>\doreplacefeature {...,*...}</code></p> <p>*    NAME</p>
<p><code>\doresetandafffeature {...,*...}</code></p> <p>*    NAME</p>
<p><code>\doresetattribute {<sup>*</sup>...}</code></p> <p>*    NAME</p>
<p><code>\dorotatebox {<sup>1</sup>...} \<sup>2</sup>... {<sup>3</sup>...}</code></p> <p>1    NUMBER</p> <p>2    CSNAME</p> <p>3    CONTENT</p>
<p><code>\dosetattribute {<sup>1</sup>...} {<sup>2</sup>...}</code></p> <p>1    NAME</p> <p>2    NUMBER</p>
<p><code>\dosetleftskipadaption {<sup>*</sup>...}</code></p> <p>*    yes no standard DIMENSION</p>
<p><code>\dosetrighskipadaption {<sup>*</sup>...}</code></p> <p>*    yes no standard DIMENSION</p>
<p><code>\dosetupcheckedinterlinespace {...,<sup>*</sup>...}</code></p> <p>*    inherits: \setupinterlinespace</p>
<p><code>\dosetupcheckedinterlinespace {...,<sup>*</sup>...}</code></p> <p>*    on off reset auto small medium big NUMBER DIMENSION</p>
<p><code>\dosetupcheckedinterlinespace {<sup>*</sup>...}</code></p> <p>*    NAME</p>
<p><code>\doseventupleargument \<sup>1</sup>... [<sup>2</sup>...] [<sup>3</sup>] [<sup>4</sup>] [<sup>5</sup>] [<sup>6</sup>] [<sup>7</sup>] [<sup>8</sup>]</code></p> <p>1    CSNAME</p> <p>2    TEXT</p> <p>3    TEXT</p> <p>4    TEXT</p> <p>5    TEXT</p> <p>6    TEXT</p> <p>7    TEXT</p> <p>8    TEXT</p>
<p><code>\doseventupleempty \<sup>1</sup>... [<sup>2</sup>] [<sup>3</sup>] [<sup>4</sup>] [<sup>5</sup>] [<sup>6</sup>] [<sup>7</sup>] [<sup>8</sup>]</code></p> <p>1    CSNAME</p> <p>2    TEXT</p> <p>3    TEXT</p> <p>4    TEXT</p> <p>5    TEXT</p> <p>6    TEXT</p> <p>7    TEXT</p> <p>8    TEXT</p>



$\backslash\text{dosingleargument} \backslash.^1. [.^2.]$ 1 CSNAME 2 TEXT
$\backslash\text{dosingleempty} \backslash.^1. [.^2.]$ 1 CSNAME OPT 2 TEXT
$\backslash\text{dosinglegroupempty} \backslash.^1. \{.^2.\}$ 1 CSNAME OPT 2 TEXT
$\backslash\text{dosixtupleargument} \backslash.^1. [.^2.] [.^3.] [.^4.] [.^5.] [.^6.] [.^7.]$ 1 CSNAME 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT 7 TEXT
$\backslash\text{dosixtupleempty} \backslash.^1. [.^2.] [.^3.] [.^4.] [.^5.] [.^6.] [.^7.]$ 1 CSNAME OPT OPT OPT OPT OPT OPT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT 7 TEXT
$\backslash\text{dostarttagged} \{.^1.\} \{.^2.\} \dots \backslash\text{dostoptagged}$ 1 NAME 2 NAME
$\backslash\text{dostepwiserecurse} \{.^1.\} \{.^2.\} \{.^3.\} \{.^4.\}$ 1 NUMBER 2 NUMBER 3 [-+]NUMBER 4 COMMAND
$\backslash\text{dosubtractfeature} \{.^*.\} \{.^*.\}$ * NAME
$\backslash\text{dot} \{.^*.\}$ * CHARACTER
$\backslash\text{dotfskip} \{.^*.\}$ * DIMENSION
$\backslash\text{dotoks} \backslash.^*.$ * CSNAME
$\backslash\text{dotripleargument} \backslash.^1. [.^2.] [.^3.] [.^4.]$ 1 CSNAME 2 TEXT 3 TEXT 4 TEXT
$\backslash\text{dotripleargumentwithset} \backslash.^1. [...,.^2,...] [.^3.] [.^4.]$ 1 CSNAME 2 TEXT 3 TEXT 4 TEXT

`\dotripleempty \1... [2...] [3...] [4...]`

1 CSNAME OPT OPT OPT  
2 TEXT  
3 TEXT  
4 TEXT

`\dotripleemptywithset \1... [2...,...]2 [3...] [4...]`

1 CSNAME OPT OPT OPT  
2 TEXT  
3 TEXT  
4 TEXT

`\dotriplegroupempty \1... {2...} {3...} {4...}`

1 CSNAME OPT OPT OPT  
2 TEXT  
3 TEXT  
4 TEXT

`\doublebond`

`\dowith {1...,...} {2...}`

1 COMMAND  
2 COMMAND

`\dowithnextbox {1...} \2... {3...}`

1 COMMAND  
2 CSNAME  
3 CONTENT

`\dowithnextboxcontent {1...} {2...} \3... {4...}`

1 COMMAND  
2 COMMAND  
3 CSNAME  
4 CONTENT

`\dowithnextboxcontentcs \1... \2... \3... {4...}`

1 CSNAME  
2 CSNAME  
3 CSNAME  
4 CONTENT

`\dowithnextboxcs \1... \2... {3...}`

1 CSNAME  
2 CSNAME  
3 CONTENT

`\dowithpargument \*...`

\* CSNAME

`\dowithrange {1...,...} \2...`

1 NUMBER NUMBER:NUMBER  
2 CSNAME

`\dowithwargument \*...`

\* CSNAME

`\dpofstring {*...}`

\* TEXT

`\dummydigit`

`\dummyparameter {*...}`

\* KEY

<code>\ETEX</code>
<code>\EveryLine {...}</code> *    COMMAND
<code>\EveryPar {...}</code> *    COMMAND
<code>\edefconvertedargument \<sup>1</sup>... {\<sup>2</sup>...}</code> 1    CSNAME 2    TEXT
<code>\efcmaxheight {...}</code> *    NAME
<code>\efcmaxwidth {...}</code> *    NAME
<code>\efcminheight {...}</code> *    NAME
<code>\efcminwidth {...}</code> *    NAME
<code>\efcparameter {\<sup>1</sup>...} {\<sup>2</sup>...}</code> 1    NAME 2    KEY
<code>\effect [<sup>1</sup>...] {\<sup>2</sup>...}</code> 1    NAME 2    CONTENT
<code>\elapsedseconds</code>
<code>\elapsedtime</code>
<code>\em</code>
<code>\emphasisboldface</code>
<code>\emphasistypeface</code>
<code>\emptylines [<sup>*</sup>...]</code> *    NUMBER            OPT
<code>\emspace</code>
<code>\enabledirectives [...,*...]</code> *    NAME
<code>\enableexperiments [...,*...]</code> *    NAME
<code>\enablemode [...,*...]</code> *    NAME

<code>\enableoutputstream [...]</code> *    NAME
<code>\enableparpositions</code>
<code>\enableregime [...]</code> *    cp1250 cp1251 cp1252 cp1253 cp1254 cp1255 cp1256 cp1257 cp1258 8859-1 8859-2 8859-3 8859-4 8859-9 8859-10 8859-13 8859-14 8859-15 8859-16 utf windows-1250 windows-1251 windows-1252 windows-1253 windows-1254 windows-1255 windows-1256 windows-1257 windows-1258 il1 il2 il3 il4 il5 il6 il7 il8 il9 il10 iso-8859-1 iso-8859-2 iso-8859-3 iso-8859-4 iso-8859-9 iso-8859-10 iso-8859-13 iso-8859-14 iso-8859-15 iso-8859-16 latin1 latin2 latin3 latin4 latin5 latin6 latin7 latin8 latin9 latin10 utf-8 utf8 windows
<code>\enabletrackers [...,*...]</code> *    NAME
<code>\enskip</code>
<code>\enspace</code>
<code>\ENUMERATION [...,<sup>1</sup>...] {..<sup>2</sup>.} ..<sup>3</sup>. \par</code> 1    REFERENCE                    OPT                    OPT 2    TEXT 3    CONTENT
<code>\env {...}</code> *    KEY
<code>\environment [...]</code> *    FILE
<code>\environment ...</code> *    FILE
<code>\envvar {..<sup>1</sup>.} {..<sup>2</sup>.}</code> 1    KEY 2    COMMAND
<code>\epos {...}</code> *    NAME
<code>\equaldigits {...}</code> *    TEXT
<code>\eTeX</code>
<code>\executeifdefined {..<sup>1</sup>.} {..<sup>2</sup>.}</code> 1    NAME 2    COMMAND
<code>\exitloop</code>
<code>\exitloopnow</code>
<code>\expandcheckedcsname \..<sup>1</sup>. {..<sup>2</sup>.} {..<sup>3</sup>.}</code> 1    CSNAME 2    KEY 3    TEXT

<code>\expanded {...}</code> *    CONTENT
<code>\expandeddoif {...} {...} {...}</code> 1    CONTENT 2    CONTENT 3    TRUE
<code>\expandeddoifelse {...} {...} {...} {...}</code> 1    CONTENT 2    CONTENT 3    TRUE 4    FALSE
<code>\expandeddoifnot {...} {...} {...}</code> 1    CONTENT 2    CONTENT 3    TRUE
<code>\expandfontsynonym \<sup>1</sup>... {<sup>2</sup>...}</code> 1    CSNAME 2    NAME
<code>\expdoif {...} {...} {...}</code> 1    CONTENT 2    CONTENT 3    TRUE
<code>\expdoifcommonelse {...,<sup>1</sup>...} {...,<sup>2</sup>...} {...} {...}</code> 1    TEXT 2    TEXT 3    TRUE 4    FALSE
<code>\expdoifelse {...} {...} {...} {...}</code> 1    CONTENT 2    CONTENT 3    TRUE 4    FALSE
<code>\expdoifelsecommon {...,<sup>1</sup>...} {...,<sup>2</sup>...} {...} {...}</code> 1    TEXT 2    TEXT 3    TRUE 4    FALSE
<code>\expdoifelseinset {...} {...,<sup>2</sup>...} {...} {...}</code> 1    TEXT 2    TEXT 3    TRUE 4    FALSE
<code>\expdoifinsetelse {...} {...,<sup>2</sup>...} {...} {...}</code> 1    TEXT 2    TEXT 3    TRUE 4    FALSE
<code>\expdoifnot {...} {...} {...}</code> 1    CONTENT 2    CONTENT 3    TRUE

<code>\externalfigure [...]<sup>1</sup> [...]<sup>2</sup> [...,...<sup>3</sup>...,...]</code> 1 FILE OPT OPT 2 NAME 3 inherits: \setupexternalfigure
<code>\externalfigurecollectionmaxheight {...}</code> * NAME
<code>\externalfigurecollectionmaxwidth {...}</code> * NAME
<code>\externalfigurecollectionminheight {...}</code> * NAME
<code>\externalfigurecollectionminwidth {...}</code> * NAME
<code>\externalfigurecollectionparameter {...}<sup>1</sup> {...}<sup>2</sup></code> 1 NAME 2 KEY
<code>\fakebox ...</code> * CSNAME NUMBER
<code>\fastdecrement \...</code> * CSNAME
<code>\fastincrement \...</code> * CSNAME
<code>\fastlocalframed [...]<sup>1</sup> [...,...<sup>2</sup>...,...]<sup>3</sup> {...}</code> 1 NAME 2 inherits: \setupframed 3 CONTENT
<code>\fastloopfinal</code>
<code>\fastloopindex</code>
<code>\fastscale {...}<sup>1</sup> {...}<sup>2</sup></code> 1 NUMBER 2 CONTENT
<code>\fastsetup {...}</code> * NAME
<code>\fastsetupwithargument {...}<sup>1</sup> {...}<sup>2</sup></code> 1 NAME 2 CONTENT
<code>\fastsetupwithargumentswapped {...}<sup>1</sup> {...}<sup>2</sup></code> 1 CONTENT 2 NAME
<code>\fastswitchtobodyfont {...}</code> * x xx small big script scriptscript

<pre> \fastxsxy {...} {...} {...} 1  NUMBER 2  NUMBER 3  CONTENT </pre>
<pre> \feature [...<sup>1</sup>] [...<sup>2</sup>,...] 1  + - = ! &gt; &lt; more less new reset default old local 2  NAME </pre>
<pre> \feature {...<sup>1</sup>} {...<sup>2</sup>,...} 1  + - = ! &gt; &lt; more less new reset default old local 2  NAME </pre>
<pre> \fence </pre>
<pre> \fenced [...<sup>1</sup>] {...<sup>2</sup>} 1  NAME 2  CONTENT </pre>
<pre> \FENCE {...<sup>*</sup>} *  CONTENT </pre>
<pre> \fetchallmarkings [...<sup>1</sup>] [...<sup>2</sup>] 1  MARK 2  page NAME </pre>
<pre> \fetchallmarks [...<sup>*</sup>] *  MARK </pre>
<pre> \fetchmark [...<sup>1</sup>] [...<sup>2</sup>] 1  MARK 2  first last current previous next top bottom default both all first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck </pre>
<pre> \fetchmarking [...<sup>1</sup>] [...<sup>2</sup>] [...<sup>3</sup>] 1  MARK 2  page NAME 3  first last current previous next top bottom default both all first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck </pre>
<pre> \fetchonemark [...<sup>1</sup>] [...<sup>2</sup>] 1  MARK 2  first last current previous next top bottom default both all first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck </pre>
<pre> \fetchonemarking [...<sup>1</sup>] [...<sup>2</sup>] [...<sup>3</sup>] 1  MARK 2  page NAME 3  first last current previous next top bottom default both all first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck </pre>
<pre> \fetchruntimecommand \... {...<sup>1</sup>} {...<sup>2</sup>} 1  CSNAME 2  FILE </pre>
<pre> \fetchtwomarkings [...<sup>1</sup>] [...<sup>2</sup>] 1  MARK 2  page NAME </pre>
<pre> \fetchtwomarks [...<sup>*</sup>] *  MARK </pre>

<code>\field [...]<sup>1</sup> [...]<sup>2</sup></code> 1 NAME OPT 2 TEXT
<code>\fieldbody [...]<sup>1</sup> [...,...]<sup>2</sup>...</code> 1 NAME OPT 2 inherits: \setupfieldbody
<code>\fieldstack [...]<sup>1</sup> [...,...]<sup>2</sup> [...,...]<sup>3</sup>...</code> 1 NAME OPT OPT 2 NAME 3 inherits: \setupfieldcategory
<code>\fifthoffivearguments {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup> {...}<sup>5</sup></code> 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT
<code>\fifthofsixarguments {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup> {...}<sup>5</sup> {...}<sup>6</sup></code> 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT
<code>\figurefilename</code>
<code>\figurefilepath</code>
<code>\figurefiletype</code>
<code>\figurefullname</code>
<code>\figureheight</code>
<code>\figurenaturalheight</code>
<code>\figurenaturalwidth</code>
<code>\figuresymbol [...]<sup>1</sup> [...,...]<sup>2</sup>...</code> 1 FILE NAME OPT 2 inherits: \externalfigure
<code>\figurewidth</code>
<code>\filename {...}</code> * FILE
<code>\filledhboxb ...<sup>1</sup> {...}<sup>2</sup></code> 1 TEXT OPT 2 CONTENT
<code>\filledhboxc ...<sup>1</sup> {...}<sup>2</sup></code> 1 TEXT OPT 2 CONTENT



<pre> \filledhboxg <sup>1</sup>... {<sup>2</sup>...} 1  TEXT          OPT 2  CONTENT </pre>
<pre> \filledhboxk <sup>1</sup>... {<sup>2</sup>...} 1  TEXT          OPT 2  CONTENT </pre>
<pre> \filledhboxm <sup>1</sup>... {<sup>2</sup>...} 1  TEXT          OPT 2  CONTENT </pre>
<pre> \filledhboxr <sup>1</sup>... {<sup>2</sup>...} 1  TEXT          OPT 2  CONTENT </pre>
<pre> \filledhboxy <sup>1</sup>... {<sup>2</sup>...} 1  TEXT          OPT 2  CONTENT </pre>
<pre> \filler [... ] *   sym symbol rule width space NAME </pre>
<pre> \fillinline [...,..<sup>*</sup>...,...] *   inherits: \setupfillinlines </pre>
<pre> \fillinrules [...,..<sup>1</sup>...,...] {<sup>2</sup>...} {<sup>3</sup>...} 1  inherits: \setupfillinrules      OPT      OPT 2  TEXT 3  TEXT </pre>
<pre> \fillintext [...,..<sup>1</sup>...,...] {<sup>2</sup>...} {<sup>3</sup>...} 1  inherits: \setupfillinrules      OPT      OPT 2  TEXT 3  TEXT </pre>
<pre> \fillupto [...<sup>1</sup>] {<sup>2</sup>...} 1  sym symbol rule width space NAME 2  TEXT </pre>
<pre> \filterfromnext {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...} {<sup>5</sup>...} {<sup>6</sup>...} {<sup>7</sup>...} 1  NUMBER          OPT      OPT      OPT      OPT      OPT 2  NUMBER 3  CONTENT 4  CONTENT 5  CONTENT 6  CONTENT 7  CONTENT </pre>
<pre> \filterfromvalue {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...} 1  NAME 2  NUMBER 3  NUMBER </pre>
<pre> \filterpages [...<sup>1</sup>] [...,<sup>2</sup>...] [...,<sup>3</sup>...,...] 1  FILE          OPT 2  even odd NUMBER NUMBER:NUMBER 3  width      =  DIMENSION    n          =  NUMBER    category   =  NAME </pre>
<pre> \filterreference {<sup>*</sup>...} *   default text title number page realpage </pre>

\findtwopassdata {...} {...}

1 NAME  
2 NAME

\finishregisterentry [...]<sup>1</sup> [...,...<sup>2</sup>...,...]<sup>2</sup> [...,...<sup>3</sup>...,...]<sup>3</sup>

1 NAME  
2 label = NAME  
keys = TEXT PROCESSOR->TEXT  
entries = TEXT PROCESSOR->TEXT  
alternative = TEXT  
3 KEY = VALUE  
OPT

\firstcharacter

\firstcounter [...]<sup>1</sup> [...]<sup>2</sup>

1 NAME  
2 NUMBER  
OPT

\firstcountervalue [...]<sup>\*</sup>

\* NAME

\firstinlist [...]<sup>\*</sup>,...]

\* COMMAND

\firstoffivearguments {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup> {...}<sup>5</sup>

1 TEXT  
2 TEXT  
3 TEXT  
4 TEXT  
5 TEXT

\firstoffourarguments {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup>

1 TEXT  
2 TEXT  
3 TEXT  
4 TEXT

\firstofoneargument {...}<sup>\*</sup>

\* TEXT

\firstofoneunexpanded {...}<sup>\*</sup>

\* TEXT

\firstofsixarguments {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup> {...}<sup>5</sup> {...}<sup>6</sup>

1 TEXT  
2 TEXT  
3 TEXT  
4 TEXT  
5 TEXT  
6 TEXT

\firstofthreearguments {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup>

1 TEXT  
2 TEXT  
3 TEXT

\firstofthreeunexpanded {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup>

1 TEXT  
2 TEXT  
3 TEXT

\firstoftwoarguments {...}<sup>1</sup> {...}<sup>2</sup>

1 TEXT  
2 TEXT

<code>\firstoftwounexpanded {...} {...}</code> 1 TEXT 2 TEXT
<code>\firstrealpage</code>
<code>\firstrealpagenumber</code>
<code>\firstsubcountervalue [...] [...]</code> 1 NAME 2 NUMBER
<code>\firstsubpage</code>
<code>\firstsubpagenumber</code>
<code>\firstuserpage</code>
<code>\firstuserpagenumber</code>
<code>\fitfield [...] [...,<sup>2</sup>...]</code> 1 NAME OPT 2 inherits: \setupfieldbody
<code>\fitfieldframed [...,<sup>1</sup>...]{...}</code> 1 inherits: \setupframed OPT 2 CONTENT
<code>\fittopbaselinegrid {...}</code> * CONTENT
<code>\fixedspace</code>
<code>\fixedspaces</code>
<code>\flag {...}</code> * NAME
<code>\floatuserdataparameter {...}</code> * KEY
<code>\flushbox {...} {...}</code> 1 NAME 2 NAME
<code>\flushboxregister ...</code> * CSNAME NUMBER
<code>\flushcollector [...]</code> * NAME
<code>\flushedrightlastline</code>
<code>\flushlayer [...]</code> * NAME
<code>\flushlocalfloats</code>

<code>\flushnextbox</code>
<code>\flushnotes</code>
<code>\flushoutputstream [...]</code> *   NAME
<code>\flushshapebox</code>
<code>\flushtextflow {...}</code> *   NAME
<code>\flushtokens [...]</code> *   NAME
<code>\flushtoks \*...</code> *   CSNAME
<code>\fontalternative</code>
<code>\fontbody</code>
<code>\fontchar {...}</code> *   NAME
<code>\fontcharbyindex {...}</code> *   NUMBER
<code>\fontclass</code>
<code>\fontclassname {...} {...}</code> 1   NAME 2   FONT
<code>\fontface</code>
<code>\fontfeaturelist [...]<sup>1</sup> [...]<sup>2</sup></code> 1   NAME 2   TEXT
<code>\fontsize</code>
<code>\fontstyle</code>
<code>\footnotetext [...]<sup>1</sup>,...<sup>2</sup> {...}</code> 1   REFERENCE           OPT 2   TEXT
<code>\footnotetext [...,...<sup>*</sup>,...]</code> *   title       = TEXT bookmark    = TEXT list        = TEXT reference   = REFERENCE
<code>\forcecharacterstripping</code>
<code>\forcelocalfloats</code>

<code>\forgeteverypar</code>
<code>\forgetparameters [...]<sup>1</sup> [...,...<sup>2</sup>...,...]</code> 1 TEXT 2 KEY = VALUE
<code>\forgetparskip</code>
<code>\forgetragged</code>
<code>\formula [...]<sup>1</sup>,...<sup>2</sup>]{...}</code> 1 packed tight <sup>OPT</sup> middle frame depth line halflines -line -halflines inherits: \setupbodyfont 2 CONTENT
<code>\formulanumber [...]<sup>*</sup>,...<sup>OPT</sup>]</code> * REFERENCE
<code>\foundbox {...}<sup>1</sup> {...}<sup>2</sup>}</code> 1 NAME 2 NAME
<code>\fourthoffivearguments {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup> {...}<sup>5</sup>}</code> 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT
<code>\fourthoffourarguments {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup>}</code> 1 TEXT 2 TEXT 3 TEXT 4 TEXT
<code>\fourthofsixarguments {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup> {...}<sup>5</sup> {...}<sup>6</sup>}</code> 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT
<code>\FRACTION {...}<sup>1</sup> {...}<sup>2</sup>}</code> 1 CONTENT 2 CONTENT instances: xfrac xxfrac frac sfrac dfrac binom dbinom tbinom
<code>\binom {...}<sup>1</sup> {...}<sup>2</sup>}</code> 1 CONTENT 2 CONTENT
<code>\dbinom {...}<sup>1</sup> {...}<sup>2</sup>}</code> 1 CONTENT 2 CONTENT
<code>\dfrac {...}<sup>1</sup> {...}<sup>2</sup>}</code> 1 CONTENT 2 CONTENT
<code>\frac {...}<sup>1</sup> {...}<sup>2</sup>}</code> 1 CONTENT 2 CONTENT

$\backslash sfrac \{...\} \{...\}$ 1    CONTENT 2    CONTENT
$\backslash tbinom \{...\} \{...\}$ 1    CONTENT 2    CONTENT
$\backslash xfrac \{...\} \{...\}$ 1    CONTENT 2    CONTENT
$\backslash xxfrac \{...\} \{...\}$ 1    CONTENT 2    CONTENT
$\backslash framed \left[ ..., \dots \stackrel{1}{=} \dots, \dots \right] \{...\}$ 1    inherits: $\backslash setupframed$ 2    CONTENT
$\backslash frameddimension \{...\}$ *    KEY
$\backslash framedparameter \{...\}$ *    KEY
$\backslash FRAMEDTEXT \left[ ..., \dots \stackrel{1}{=} \dots, \dots \right] \{...\}$ 1    inherits: $\backslash setupframedtext$ 2    CONTENT instances: framedtext
$\backslash framedtext \left[ ..., \dots \stackrel{1}{=} \dots, \dots \right] \{...\}$ 1    inherits: $\backslash setupframedtext$ 2    CONTENT
$\backslash FRAMED \left[ ..., \dots \stackrel{1}{=} \dots, \dots \right] \{...\}$ 1    inherits: $\backslash setupframed$ 2    CONTENT instances: unframed fitfieldframed
$\backslash fitfieldframed \left[ ..., \dots \stackrel{1}{=} \dots, \dots \right] \{...\}$ 1    inherits: $\backslash setupframed$ OPT 2    CONTENT
$\backslash unframed \left[ ..., \dots \stackrel{1}{=} \dots, \dots \right] \{...\}$ 1    inherits: $\backslash setupframed$ 2    CONTENT
$\backslash freezedimenmacro \stackrel{1}{\backslash} \dots \stackrel{2}{\backslash} \dots$ 1    CSNAME 2    CSNAME
$\backslash freezemeasure \left[ \stackrel{1}{.} \dots \right] \left[ \stackrel{2}{.} \dots \right]$ 1    NAME 2    DIMENSION
$\backslash frenchspacing$
$\backslash from \left[ \stackrel{*}{.} \dots \right]$ *    REFERENCE

<code>\fromlinenote [...]{...}</code> 1   REFERENCE 2   TEXT
<code>\frozenhbox {...}</code> *   CONTENT
<code>\frule .. .* .. \relax</code> *   width <sub>┐</sub> DIMENSION height <sub>┐</sub> DIMENSION depth <sub>┐</sub> DIMENSION radius <sub>┐</sub> DIMENSION line <sub>┐</sub> DIMENSION type <sub>┐</sub> TEXT data <sub>┐</sub> TEXT name <sub>┐</sub> TEXT
<code>\GetPar</code>
<code>\GotoPar</code>
<code>\Greeknumerals {...}</code> *   NUMBER
<code>\gdefconvertedargument \<sup>1</sup>... {<sup>2</sup>...}</code> 1   CSNAME 2   TEXT
<code>\gdefconvertedcommand \<sup>1</sup>... \<sup>2</sup>...</code> 1   CSNAME 2   CSNAME
<code>\getboxfromcache {<sup>1</sup>...} {<sup>2</sup>...} <sup>3</sup>...</code> 1   NAME 2   NUMBER TEXT 3   CSNAME NUMBER
<code>\getboxllx <sup>*</sup>...</code> *   CSNAME NUMBER
<code>\getboxlly <sup>*</sup>...</code> *   CSNAME NUMBER
<code>\getbuffer [...,<sup>*</sup>...]</code> *   BUFFER <span style="margin-left: 100px;">OPT</span>
<code>\getbufferdata [...]</code> *   BUFFER <span style="margin-left: 100px;">OPT</span>
<code>\getBUFFER</code>
<code>\getcommacommandsize [...,<sup>*</sup>...]</code> *   COMMAND
<code>\getcommalistsize [...,<sup>*</sup>...]</code> *   COMMAND
<code>\getdayoftheweek {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}</code> 1   NUMBER 2   NUMBER 3   NUMBER
<code>\getdayspermonth {<sup>1</sup>...} {<sup>2</sup>...}</code> 1   NUMBER 2   NUMBER

\getdefinedbuffer [...] *    BUFFER
\getdocumentargument {...} *    NAME
\getdocumentargumentdefault {...} {...} 1    NAME 2    TEXT
\getdocumentfilename {...} *    NUMBER
\getdummyparameters [...,.. <sup>*</sup> ...,...] *    KEY   =   VALUE
\getemptyparameters [...] <sup>1</sup> [...,.. <sup>2</sup> ...,...] 1    TEXT 2    KEY   =   VALUE
\getparameters [...] <sup>1</sup> [...,.. <sup>2</sup> ...,...] 1    TEXT 2    KEY   =   VALUE
\getexpandedparameters [...] <sup>1</sup> [...,.. <sup>2</sup> ...,...] 1    TEXT 2    KEY   =   VALUE
\getfiguredimensions [...] <sup>1</sup> [...,.. <sup>2</sup> ...,...] <sup>OPT</sup> 1    FILE 2    inherits: \setupexternalfigure
\getfirstcharacter {...} *    TEXT
\getfirsttwopassdata {...} *    NAME
\getfromcommacommand [..., <sup>1</sup> ...] [...] <sup>2</sup> 1    COMMAND 2    NUMBER
\getfromcommalist [..., <sup>1</sup> ...] [...] <sup>2</sup> 1    COMMAND 2    NUMBER
\getfromtwopassdata {...} <sup>1</sup> {...} <sup>2</sup> 1    NAME 2    NAME
\getglyphdirect {...} <sup>1</sup> {...} <sup>2</sup> 1    FONT 2    NUMBER CHARACTER
\getglyphstyled {...} <sup>1</sup> {...} <sup>2</sup> 1    FONT 2    NUMBER CHARACTER



\getgparameters [ <sup>1</sup> ...] [ <sup>2</sup> ... <sub>2</sub> ...] 1 TEXT 2 KEY = VALUE
\getlasttwopassdata {...} * NAME
\getlocalfloat {...} * NUMBER
\getlocalfloats
\getMPdrawing
\getMPlayer [ <sup>1</sup> ...] [ <sup>2</sup> ... <sub>2</sub> ...] <sup>3</sup> {...} 1 NAME OPT 2 inherits: \setupframed 3 CONTENT
\getmarking [ <sup>1</sup> ...] [ <sup>2</sup> ...] <sup>3</sup> [ <sup>3</sup> ...] 1 MARK OPT OPT 2 page NAME 3 first last current previous next top bottom default both all first:nocheck last:nocheck previous:nocheck next:nocheck top:nocheck bottom:nocheck
\getmessage {...} {...} 1 NAME 2 NAME NUMBER
\getnamedglyphdirect {...} {...} 1 FONT 2 NAME
\getnamedglyphstyled {...} {...} 1 FONT 2 NAME
\getnamedtwopassdatalist \ <sup>1</sup> ... {...} <sup>2</sup> 1 CSNAME 2 NAME
\getnaturaldimensions ... * CSNAME NUMBER
\getnoflines {...} * DIMENSION
\getobject {...} {...} 1 NAME 2 NAME
\getobjectdimensions {...} {...} 1 NAME 2 NAME
\getpaletsizes [ <sup>1</sup> ...] * NAME

<pre> \getparameters [<sup>1</sup>...] [<sup>2</sup>...,...<sup>2</sup>...,...] 1 TEXT 2 KEY = VALUE </pre>
<pre> \getprivatechar {...} * NAME </pre>
<pre> \getprivateslot {...} * NAME </pre>
<pre> \getrandomcount \<sup>1</sup>... {<sup>2</sup>...} {<sup>3</sup>...} 1 CSNAME 2 NUMBER 3 NUMBER </pre>
<pre> \getrandomdimen \<sup>1</sup>... {<sup>2</sup>...} {<sup>3</sup>...} 1 CSNAME 2 DIMENSION 3 DIMENSION </pre>
<pre> \getrandomfloat \<sup>1</sup>... {<sup>2</sup>...} {<sup>3</sup>...} 1 CSNAME 2 NUMBER 3 NUMBER </pre>
<pre> \getrandomnumber \<sup>1</sup>... {<sup>2</sup>...} {<sup>3</sup>...} 1 CSNAME 2 NUMBER 3 NUMBER </pre>
<pre> \getrandomseed \*... * CSNAME </pre>
<pre> \getrawparameters [<sup>1</sup>...] [<sup>2</sup>...,...<sup>2</sup>...,...] 1 TEXT 2 KEY = VALUE </pre>
<pre> \getrawgparameters [<sup>1</sup>...] [<sup>2</sup>...,...<sup>2</sup>...,...] 1 TEXT 2 KEY = VALUE </pre>
<pre> \getrawnoflines {...} * DIMENSION </pre>
<pre> \getrawparameters [<sup>1</sup>...] [<sup>2</sup>...,...<sup>2</sup>...,...] 1 TEXT 2 KEY = VALUE </pre>
<pre> \getrawxparameters [<sup>1</sup>...] [<sup>2</sup>...,...<sup>2</sup>...,...] 1 TEXT 2 KEY = VALUE </pre>
<pre> \getreference [<sup>1</sup>...] [<sup>2</sup>...] 1 default text title number page realpage 2 REFERENCE </pre>
<pre> \getreferenceentry {...} * default text title number page realpage </pre>
<pre> \getroundednoflines {...} * DIMENSION </pre>

<pre> \getsubstring {...} {...} {...} 1  NUMBER 2  NUMBER 3  TEXT </pre>
<pre> \gettwopassdata {...} *  NAME </pre>
<pre> \gettwopassdatalist {...} *  NAME </pre>
<pre> \getuvalue {...} *  NAME </pre>
<pre> \getvalue {...} *  NAME </pre>
<pre> \getvariable {...} {...} 1  NAME 2  KEY </pre>
<pre> \getvariabledefault {...} {...} {...} 1  NAME 2  KEY 3  COMMAND </pre>
<pre> \getxparameters [...] [...,...<sup>2</sup>...,...] 1  TEXT 2  KEY = VALUE </pre>
<pre> \globaldisablemode [...,*...] *  NAME </pre>
<pre> \globalenablemode [...,*...] *  NAME </pre>
<pre> \globalletempty \*.. *  CSNAME </pre>
<pre> \globalpopbox *.. *  CSNAME NUMBER </pre>
<pre> \globalpopmacro \*.. *  CSNAME </pre>
<pre> \globalpreventmode [...,*...] *  NAME </pre>
<pre> \globalprocesscommalist [...] \*.. 1  COMMAND 2  CSNAME </pre>
<pre> \globalpushbox *.. *  CSNAME NUMBER </pre>
<pre> \globalpushmacro \*.. *  CSNAME </pre>

`\globalpushreferenceprefix {...} ... \globalpopreferenceprefix`  
\* + - TEXT

`\globalswapcounts \1... \2...`  
1 CSNAME  
2 CSNAME

`\globalswapdimens \1... \2...`  
1 CSNAME  
2 CSNAME

`\globalswapmacros \1... \2...`  
1 CSNAME  
2 CSNAME

`\globalundefine {...}`  
\* NAME

`\glyphfontfile {...}`  
\* FONT

`\gobbledoubleempty [1...] [2...]`  
1 TEXT                      OPT              OPT  
2 TEXT

`\gobbleeightarguments {\1...} {\2...} {\3...} {\4...} {\5...} {\6...} {\7...} {\8...}`  
1 CONTENT  
2 CONTENT  
3 CONTENT  
4 CONTENT  
5 CONTENT  
6 CONTENT  
7 CONTENT  
8 CONTENT

`\gobblefivearguments {\1...} {\2...} {\3...} {\4...} {\5...}`  
1 CONTENT  
2 CONTENT  
3 CONTENT  
4 CONTENT  
5 CONTENT

`\gobblefiveoptionals [1...] [2...] [3...] [4...] [5...]`  
1 TEXT  
2 TEXT  
3 TEXT  
4 TEXT  
5 TEXT

`\gobblefourarguments {\1...} {\2...} {\3...} {\4...}`  
1 CONTENT  
2 CONTENT  
3 CONTENT  
4 CONTENT

`\gobblefouroptionals [1...] [2...] [3...] [4...]`  
1 TEXT  
2 TEXT  
3 TEXT  
4 TEXT

`\gobbleninearguments {...} {...} {...} {...} {...} {...} {...} {...} {...}`

1 CONTENT  
2 CONTENT  
3 CONTENT  
4 CONTENT  
5 CONTENT  
6 CONTENT  
7 CONTENT  
8 CONTENT  
9 CONTENT

`\gobbleoneargument {...}`

\* CONTENT

`\gobbleoneoptional [...]`

\* TEXT

`\gobblesevenarguments {...} {...} {...} {...} {...} {...} {...}`

1 CONTENT  
2 CONTENT  
3 CONTENT  
4 CONTENT  
5 CONTENT  
6 CONTENT  
7 CONTENT

`\gobblesingleempty [...]`

\* TEXT

OPT

`\gobblesixarguments {...} {...} {...} {...} {...} {...}`

1 CONTENT  
2 CONTENT  
3 CONTENT  
4 CONTENT  
5 CONTENT  
6 CONTENT

`\gobblespacetokens`

`\gobbletenarguments {...} {...} {...} {...} {...} {...} {...} {...} {...} {...}`

1 CONTENT  
2 CONTENT  
3 CONTENT  
4 CONTENT  
5 CONTENT  
6 CONTENT  
7 CONTENT  
8 CONTENT  
9 CONTENT  
10 CONTENT

`\gobblethreearguments {...} {...} {...}`

1 CONTENT  
2 CONTENT  
3 CONTENT

`\gobblethreeoptionals [...] [...] [...]`

1 TEXT  
2 TEXT  
3 TEXT

`\gobbletwoarguments {...} {...}`

1 CONTENT  
2 CONTENT

<code>\gobbletwooptionals [...] [...]</code> 1 TEXT 2 TEXT
<code>\gobbleuntil \...</code> * CSNAME
<code>\gobbleuntilrelax ... \relax</code> * CONTENT
<code>\godown [...]</code> * DIMENSION
<code>\goto {...} [...]</code> 1 CONTENT 2 REFERENCE
<code>\gotobox {...} [...]</code> 1 CONTENT 2 REFERENCE
<code>\gotopage {...} [...]</code> 1 TEXT 2 REFERENCE
<code>\grabbufferdata [...] [...] [...] [...]</code> 1 CATEGORY                    OPT 2 NAME 3 NAME 4 NAME
<code>\grabbufferdatadirect {...} {...} {...}</code> 1 NAME 2 NAME 3 NAME
<code>\grabuntil {...} \...</code> 1 NAME 2 CSNAME
<code>\grave {...}</code> * CHARACTER
<code>\graycolor [...] {...}</code> 1 COLOR 2 CONTENT
<code>\grayvalue {...}</code> * COLOR
<code>\greedystring \at ... \to ... \and \...</code> 1 TEXT 2 TEXT 3 CSNAME 4 CSNAME
<code>\greeknumerals {...}</code> * NUMBER
<code>\grid [..., ..., ..., ...]</code> * inherits: \basegrid

<code>\groupedcommand {...} {...}</code> 1    COMMAND 2    COMMAND
<code>\gsetboxllx <sup>1</sup>... {...}</code> 1    CSNAME NUMBER 2    DIMENSION
<code>\gsetboxlly <sup>1</sup>... {...}</code> 1    CSNAME NUMBER 2    DIMENSION
<code>\gujaratinumerals {...}</code> *    NUMBER
<code>\gurmukhinumerals {...}</code> *    NUMBER
<code>\hairline</code>
<code>\hairspace</code>
<code>\halflinestrut</code>
<code>\halfstrut</code>
<code>\halfwaybox {...}</code> *    CONTENT
<code>\handletokens <sup>1</sup>... \with \<sup>2</sup>...</code> 1    TEXT 2    CSNAME
<code>\handwritten</code>
<code>\hash</code>
<code>\hat {...}</code> *    CHARACTER
<code>\hboxofvbox ...</code> *    CSNAME NUMBER
<code>\hboxreference [...<sup>1</sup>,...] {...<sup>2</sup>}</code> 1    REFERENCE 2    CONTENT
<code>\hboxBOX {...}</code> *    CONTENT
<code>\hdofstring {...}</code> *    TEXT
<code>\headhbox <sup>1</sup>... {...<sup>2</sup>}</code> 1    TEXT        OPT 2    CONTENT





## \* REFERENCE

1	NAME	OPT
2	NAME	

\* CONTENT

1	NAME
2	TEXT

\* TEXT

\* TEXT

```
instances: unitshigh
```

\* CONTENT

```

1  left rightGPT
2  CONTENT
3  CONTENT

```

1	CONTENT
2	CONTENT
3	CONTENT

\* NUMBER

```
* inherits: \setuppositionbar
```

```
* inherits: \setuppositionbar
```

\* CONTENT

1	NAME
2	CONTENT

1 DIMENSION  
2 NUMBER

\* CONTENT

\hsmashbox ... * CSNAME NUMBER
\hsmashed {...} * CONTENT
\hspace [...] [...] 1 NAME OPT OPT 2 small medium big normal <u>default</u> none .5 1 2 3 speech quote interquotation quotation sentence intersentence NAME
\htdpofstring {...} * TEXT
\htofstring {...} * TEXT
\hyphen
\hyphenatedcoloredword {...} * TEXT
\hyphenatedfile {...} * FILE
\hyphenatedfilename {...} * TEXT
\hyphenatedhbox {...} * CONTENT
\hyphenatedpar {...} * TEXT
\hyphenatedurl {...} * TEXT
\hyphenatedword {...} * TEXT
\INRSTEX
\ibox {...} * CONTENT
\ifassignment ... \else ... \fi 1 TRUE 2 FALSE
\iff
\ifinobject ... \else ... \fi 1 TRUE 2 FALSE
\ifinoutputstream ... \else ... \fi 1 TRUE 2 FALSE

<code>\ifparameters <sup>1</sup>... \else <sup>2</sup>... \fi</code> 1 TRUE 2 FALSE
<code>\iftrialisetting <sup>1</sup>... \else <sup>2</sup>... \fi</code> 1 TRUE 2 FALSE
<code>\ignoreimplicitspaces</code>
<code>\ignoretagsinexport [...*,...]</code> * NAME
<code>\ignorevalue {...}</code> * NAME
<code>\immediatesavetwopassdata {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}</code> 1 NAME 2 NUMBER 3 CONTENT
<code>\impliedby</code>
<code>\implies</code>
<code>\in {<sup>1</sup>...} {<sup>2</sup>...} [<sup>3</sup>...]</code> 1 TEXT <sup>PT</sup> OPT 2 TEXT 3 REFERENCE
<code>\includemenu [...]</code> * NAME
<code>\includeversioninfo {...}</code> * NAME
<code>\increment \...</code> * CSNAME
<code>\incrementcounter [...] [<sup>2</sup>...]</code> 1 NAME OPT 2 NUMBER
<code>\incrementedcounter [...]</code> * NAME
<code>\incrementpagenumber</code>
<code>\incrementsubpagenumber</code>
<code>\incrementvalue {...}</code> * NAME
<code>\increment (...*,...)</code> * CSNAME NUMBER
<code>\indentation</code>

<code>\infofont</code>
<code>\infofontbold</code>
<code>\inframed [...<sup>1</sup>...<sup>2</sup>] {...}</code> 1 inherits: <code>\setupfframed</code> 2 CONTENT
<code>\infull {...}</code> * NAME
<code>\inheritparameter [...<sup>1</sup>] [...<sup>2</sup>] [...<sup>3</sup>]</code> 1 TEXT 2 TEXT 3 KEY
<code>\inhibitblank</code>
<code>\initializeboxstack {...}</code> * NAME
<code>\inline {...<sup>1</sup>} [...<sup>2</sup>]</code> 1 TEXT OPT 2 REFERENCE
<code>\inlinebuffer [...<sup>*</sup>...]</code> * BUFFER OPT
<code>\inlinedbox {...}</code> * CONTENT
<code>\inlinemath {...}</code> * CONTENT
<code>\inlinemathematics {...}</code> * CONTENT
<code>\inlinemessage {...}</code> * TEXT
<code>\inlineordisplaymath {...<sup>1</sup>} {...<sup>2</sup>}</code> 1 CONTENT 2 CONTENT
<code>\inlineprettyprintbuffer {...<sup>1</sup>} {...<sup>2</sup>}</code> 1 BUFFER 2 mp lua xml parsed-xml nested tex context none NAME
<code>\inlinerange [...]</code> * REFERENCE
<code>\innerflushshapebox</code>
<code>\input {...}</code> * FILE
<code>\inputfilebarename</code>

<code>\inputfilename</code>
<code>\inputfilerealsuffix</code>
<code>\inputfilesuffix</code>
<code>\inputgivenfile {...}</code> *    FILE
<code>\input ...</code> *    FILE
<code>\insertpages [...]<sup>1</sup> [...,<sup>2</sup>...] [...,<sup>3</sup>...]<sup>OPT</sup></code> 1    FILE 2    NUMBER 3    width    = DIMENSION n        = NUMBER category = NAME
<code>\installactionhandler {...}</code> *    NAME
<code>\installactivecharacter ...</code> *    CHARACTER
<code>\installanddefineactivecharacter ...<sup>1</sup> {...}<sup>2</sup></code> 1    CHARACTER 2    COMMAND
<code>\installattributestack \...<sup>*</sup></code> *    CSNAME
<code>\installautocommandhandler \...<sup>1</sup> {...}<sup>2</sup> \...<sup>3</sup></code> 1    CSNAME 2    NAME 3    CSNAME
<code>\installautosetuphandler \...<sup>1</sup> {...}<sup>2</sup></code> 1    CSNAME 2    NAME
<code>\installbasicautosetuphandler \...<sup>1</sup> {...}<sup>2</sup> \...<sup>3</sup></code> 1    CSNAME 2    NAME 3    CSNAME
<code>\installbasicparameterhandler \...<sup>1</sup> {...}<sup>2</sup></code> 1    CSNAME 2    NAME
<code>\installbottomframerenderer {...}<sup>1</sup> {...}<sup>2</sup></code> 1    NAME 2    COMMAND
<code>\installcommandhandler \...<sup>1</sup> {...}<sup>2</sup> \...<sup>3</sup></code> 1    CSNAME 2    NAME 3    CSNAME
<code>\installcorenamespace {...}</code> *    NAME

\installdefinehandler \<sup>1</sup>... {<sup>2</sup>...} \<sup>3</sup>...

1 CSNAME  
2 NAME  
3 CSNAME

\installdefinitionset \<sup>1</sup>... {<sup>2</sup>...}

1 CSNAME  
2 NAME

\installdefinitionsetmember \<sup>1</sup>... {<sup>2</sup>...} \<sup>3</sup>... {<sup>4</sup>...}

1 CSNAME  
2 NAME  
3 CSNAME  
4 NAME

\installdirectcommandhandler \<sup>1</sup>... {<sup>2</sup>...}

1 CSNAME  
2 NAME

\installdirectparameterhandler \<sup>1</sup>... {<sup>2</sup>...}

1 CSNAME  
2 NAME

\installdirectparametersethandler \<sup>1</sup>... {<sup>2</sup>...}

1 CSNAME  
2 NAME

\installdirectsetuphandler \<sup>1</sup>... {<sup>2</sup>...}

1 CSNAME  
2 NAME

\installdirectstyleandcolorhandler \<sup>1</sup>... {<sup>2</sup>...}

1 CSNAME  
2 NAME

\installframedautocommandhandler \<sup>1</sup>... {<sup>2</sup>...} \<sup>3</sup>...

1 CSNAME  
2 NAME  
3 CSNAME

\installframedcommandhandler \<sup>1</sup>... {<sup>2</sup>...} \<sup>3</sup>...

1 CSNAME  
2 NAME  
3 CSNAME

\installglobalmacrostack \\*...

\* CSNAME

\installlanguage [<sup>1</sup>...] [...,<sup>2</sup>...,...]

1 NAME  
2 inherits: \setuplanguage

\installlanguage [<sup>1</sup>...] [...<sup>2</sup>...]

1 NAME  
2 LANGUAGE

\installleftframerenderer {<sup>1</sup>...} {<sup>2</sup>...}

1 NAME  
2 COMMAND

\installmacrostack \\*...

\* CSNAME

\installnamespace {...} *   NAME
\installoutputroutine \. <sup>1</sup> {...} 1   CSNAME 2   COMMAND
\installpagearrangement . <sup>1</sup> {...} 1   NAME 2   COMMAND
\installparameterhandler \. <sup>1</sup> {...} 1   CSNAME 2   NAME
\installparameterhashhandler \. <sup>1</sup> {...} 1   CSNAME 2   NAME
\installparametersethandler \. <sup>1</sup> {...} 1   CSNAME 2   NAME
\installparentinjector \. <sup>1</sup> {...} 1   CSNAME 2   NAME
\installrightframerenderer {. <sup>1</sup> } {. <sup>2</sup> } 1   NAME 2   COMMAND
\installrootparameterhandler \. <sup>1</sup> {...} 1   CSNAME 2   NAME
\installsetuphandler \. <sup>1</sup> {...} 1   CSNAME 2   NAME
\installsetupononlycommandhandler \. <sup>1</sup> {...} 1   CSNAME 2   NAME
\installshipoutmethod {. <sup>1</sup> } {. <sup>2</sup> } 1   NAME 2   COMMAND
\installsimplecommandhandler \. <sup>1</sup> {...} \. <sup>3</sup> . 1   CSNAME 2   NAME 3   CSNAME
\installsimpleframedcommandhandler \. <sup>1</sup> {...} \. <sup>3</sup> . 1   CSNAME 2   NAME 3   CSNAME
\installstyleandcolorhandler \. <sup>1</sup> {...} 1   CSNAME 2   NAME

<pre> \installswitchcommandhandler \.^{.^} \.^ 1 CSNAME 2 NAME 3 CSNAME </pre>
<pre> \installswitchsetuphandler \.^{.^} 1 CSNAME 2 NAME </pre>
<pre> \installtexdirective {...} {...} {...} 1 NAME 2 COMMAND 3 COMMAND </pre>
<pre> \installtextracker {...} {...} {...} 1 NAME 2 COMMAND 3 COMMAND </pre>
<pre> \installtopframerenderer {...} {...} 1 NAME 2 COMMAND </pre>
<pre> \installunitsseparator {...} {...} 1 NAME 2 COMMAND </pre>
<pre> \installunitsspace {...} {...} 1 NAME 2 COMMAND </pre>
<pre> \installversioninfo {...} {...} 1 NAME 2 COMMAND </pre>
<pre> \integerrounding {...} * NUMBER </pre>
<pre> \interactionbar [...] [...,^{.^},...] 1 NAME OPT OPT 2 inherits: \setupinteractionbar </pre>
<pre> \interactionbuttons [...,^{.^},...] [...,^{.^}] 1 inherits: \setupinteractionbar^{.^} 2 page subpage REFERENCE </pre>
<pre> \interactionmenu [...] [...,^{.^},...] 1 NAME OPT 2 inherits: \setupinteractionmenu </pre>
<pre> \intertext {...} * TEXT </pre>
<pre> \invokepagehandler {...} {...} 1 normal none NAME 2 CONTENT </pre>
<pre> \istltdir ... * TLT TRT </pre>



\istrtdir ... * TLT TRT
\italic
\italicbold
\italiccorrection
\italicface
\item [...,*...] * REFERENCE <sup>OPT</sup>
\items [..., <sup>1</sup> ...,...]{. <sup>2</sup> .} 1 inherits: \setupitems <sup>OPT</sup> 2 TEXT
\itemtag [...,*...] * REFERENCE OPT
\jobfilename
\jobfilesuffix
\kap {...} * TEXT
\keepblocks [..., <sup>1</sup> ...] [..., <sup>2</sup> ...] 1 NAME OPT 2 NAME
\keeplinestogether {...} * NUMBER
\keepunwantedspaces
\kerncharacters [..., <sup>1</sup> ...]{. <sup>2</sup> .} 1 NUMBER OPT 2 TEXT
\koreancirclenumerals {...} * NUMBER
\koreannumerals {...} * NUMBER
\koreannumeralsc {...} * NUMBER
\koreannumeralsp {...} * NUMBER
\koreanparentnumerals {...} * NUMBER

<code>\LAMSTEX</code>
<code>\LATEX</code>
<code>\LamSTeX</code>
<code>\LaTeX</code>
<code>\LUAJITTEX</code>
<code>\LUATEX</code>
<code>\Lua</code>
<code>\LuajitTeX</code>
<code>\LuaTeX</code>
<code>\LABELlanguage</code> instances: head label mathlabel taglabel unit operator prefix suffix btxlabel
<code>\btxlabellanguage</code>
<code>\headlanguage</code>
<code>\labellanguage</code>
<code>\mathlabellanguage</code>
<code>\operatorlanguage</code>
<code>\prefixlanguage</code>
<code>\suffixlanguage</code>
<code>\taglabellanguage</code>
<code>\unitlanguage</code>
<code>\LABELtexts {...} {...}</code> 1 KEY 2 TEXT instances: head label mathlabel
<code>\headtexts {...} {...}</code> 1 KEY 2 TEXT
<code>\labeltexts {...} {...}</code> 1 KEY 2 TEXT
<code>\mathlabeltexts {...} {...}</code> 1 KEY 2 TEXT

$\backslash LABELtext \{...\}$ * KEY instances: head label mathlabel taglabel unit operator prefix suffix btxlabel
$\backslash btxlabeltext \{...\}$ * KEY
$\backslash headtext \{...\}$ * KEY
$\backslash labeltext \{...\}$ * KEY
$\backslash mathlabeltext \{...\}$ * KEY
$\backslash operatorortext \{...\}$ * KEY
$\backslash prefixtext \{...\}$ * KEY
$\backslash suffixtext \{...\}$ * KEY
$\backslash taglabeltext \{...\}$ * KEY
$\backslash unittext \{...\}$ * KEY
$\backslash LABEL [ \dots, \dots ] \{ \dots \}$ 1 REFERENCE <small>OPT</small> <small>OPT</small> 2 TEXT
$\backslash language [ \dots ]$ * LANGUAGE
$\backslash languageCharacters \{ \dots \}$ * NUMBER
$\backslash languagecharacters \{ \dots \}$ * NUMBER
$\backslash languagecharwidth \{ \dots \}$ * LANGUAGE
$\backslash LANGUAGE$
$\backslash lastcounter [ \dots ] [ \dots ]$ 1 NAME <small>OPT</small> 2 NUMBER
$\backslash lastcountervalue [ \dots ]$ * NAME

<code>\lastdigit {...}</code> *    NUMBER
<code>\lastlinewidth</code>
<code>\lastnaturalboxdp</code>
<code>\lastnaturalboxht</code>
<code>\lastnaturalboxwd</code>
<code>\lastpredefinedsymbol</code>
<code>\lastrealpage</code>
<code>\lastrealpagenumber</code>
<code>\lastsubcountervalue [...]<sup>1</sup> [...]<sup>2</sup></code> 1    NAME 2    NUMBER
<code>\lastsubpage</code>
<code>\lastsubpagenumber</code>
<code>\lasttwodigits {...}</code> *    NUMBER
<code>\lastuserpage</code>
<code>\lastuserpagenumber</code>
<code>\lateluacode {...}</code> *    COMMAND
<code>\layeredtext [...]<sup>1</sup> [...]<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup></code> 1    inherits: \setuplayer <sup>OPT</sup> 2    inherits: \setuplayeredtext 3    TEXT 4    CONTENT
<code>\layerheight</code>
<code>\layerwidth</code>
<code>\lazysavetaggedtwopassdata {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup></code> 1    NAME 2    NUMBER 3    NAME 4    CONTENT
<code>\lazysavetwopassdata {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup></code> 1    NAME 2    NUMBER 3    CONTENT

$\backslash\text{box} \dots \{ \dots \}$ 1    TEXT <small>OPT</small> 2    CONTENT
$\backslash\text{left} \dots$ *    CHARACTER
$\backslash\text{leftaligned} \{ \dots \}$ *    CONTENT
$\backslash\text{leftbottombox} \{ \dots \}$ *    CONTENT
$\backslash\text{leftbox} \{ \dots \}$ *    CONTENT
$\backslash\text{lefthbox} \{ \dots \}$ *    CONTENT
$\backslash\text{leftLABELtext} \{ \dots \}$ *    KEY instances: head label mathlabel
$\backslash\text{leftheadtext} \{ \dots \}$ *    KEY
$\backslash\text{leftlabeltext} \{ \dots \}$ *    KEY
$\backslash\text{leftmathlabeltext} \{ \dots \}$ *    KEY
$\backslash\text{leftline} \{ \dots \}$ *    CONTENT
$\backslash\text{lefttorrighthbox} \dots \{ \dots \}$ 1    TEXT <small>OPT</small> 2    CONTENT
$\backslash\text{lefttorrightvbox} \dots \{ \dots \}$ 1    TEXT <small>OPT</small> 2    CONTENT
$\backslash\text{lefttorrightvtop} \dots \{ \dots \}$ 1    TEXT <small>OPT</small> 2    CONTENT
$\backslash\text{leftskipadaption}$
$\backslash\text{leftsubguillemot}$
$\backslash\text{lefttopbox} \{ \dots \}$ *    CONTENT
$\backslash\text{lefttoright}$

<code>\lefttorighthbox</code> <sup>1</sup> ... { <sup>2</sup> ...} 1 TEXT OPT 2 CONTENT
<code>\lefttorightvbox</code> <sup>1</sup> ... { <sup>2</sup> ...} 1 TEXT OPT 2 CONTENT
<code>\lefttorightvtop</code> <sup>1</sup> ... { <sup>2</sup> ...} 1 TEXT OPT 2 CONTENT
<code>\letbeundefined</code> { <sup>*</sup> ...} <sup>*</sup> NAME
<code>\letcatcodecommand</code> \ <sup>1</sup> ... <sup>2</sup> ... \ <sup>3</sup> ... 1 CSNAME 2 CHARACTER NUMBER 3 CSNAME
<code>\letcscsname</code> \ <sup>1</sup> ... \csname <sup>2</sup> ... \endcsname 1 CSNAME 2 NAME
<code>\letcsnamecs</code> \csname <sup>1</sup> ... \endcsname \ <sup>2</sup> ... 1 NAME 2 CSNAME
<code>\letcsnamecsname</code> \csname <sup>1</sup> ... \endcsname \csname <sup>2</sup> ... \endcsname 1 NAME 2 NAME
<code>\letdummyparameter</code> { <sup>1</sup> ...} \ <sup>2</sup> ... 1 KEY 2 CSNAME
<code>\letempty</code> \ <sup>*</sup> ... <sup>*</sup> CSNAME
<code>\letgvalue</code> { <sup>1</sup> ...} \ <sup>2</sup> ... 1 NAME 2 CSNAME
<code>\letgvalueempty</code> { <sup>*</sup> ...} <sup>*</sup> NAME
<code>\letgvalurelax</code> { <sup>*</sup> ...} <sup>*</sup> NAME
<code>\letterampersand</code>
<code>\letterat</code>
<code>\letterbackslash</code>
<code>\letterbar</code>
<code>\letterbgroup</code>

<code>\letterclosebrace</code>
<code>\lettercolon</code>
<code>\letterdollar</code>
<code>\letterdoublequote</code>
<code>\letteregroup</code>
<code>\letterescape</code>
<code>\letterexclamationmark</code>
<code>\letterhash</code>
<code>\letterhat</code>
<code>\letterleftbrace</code>
<code>\letterleftbracket</code>
<code>\letterleftparenthesis</code>
<code>\letterless</code>
<code>\lettermore</code>
<code>\letteropenbrace</code>
<code>\letterpercent</code>
<code>\letterquestionmark</code>
<code>\letterrightbrace</code>
<code>\letterrightbracket</code>
<code>\letterrightparenthesis</code>
<code>\lettersinglequote</code>
<code>\letterslash</code>
<code>\letterspacing</code> $[.^\textsuperscript{1}.] \{.^\textsuperscript{2}.\}$ 1    NUMBER                      OPT 2    TEXT
<code>\lettertilde</code>
<code>\letterunderscore</code>

<code>\letvalue {...} \^2..</code> 1 NAME 2 CSNAME
<code>\letvalueempty {...}</code> * NAME
<code>\letvaluerelax {...}</code> * NAME
<code>\lfence {...}</code> * CHARACTER
<code>\lhbox {...}</code> * CONTENT
<code>\limitatefirstline {...} {...} {...}</code> 1 TEXT 2 DIMENSION 3 COMMAND
<code>\limitatelines {...} {...} {...}</code> 1 NUMBER 2 COMMAND 3 TEXT
<code>\limitatetext {...} {...} {...}</code> 1 TEXT 2 [-+]DIMENSION 3 COMMAND
<code>\limitatetext {...} {...^2,...} {...}</code> 1 TEXT 2 [-+]DIMENSION 3 COMMAND
<code>\line {...}</code> * CONTENT
<code>\linebox {...}</code> * CONTENT
<code>\LINENOTE {...}</code> * TEXT instances: linenote
<code>\linenote {...}</code> * TEXT
<code>\linespanningtext {...} {...} {...}</code> 1 TEXT 2 DIMENSION 3 FONT
<code>\linewidth</code>



```
\listcitation [...1...][...2]
1 reference = REFERENCE
  alternative = default category entry short page num textnum year index tag keywords author authoryears authornum
                authoryear
  before      = COMMAND
  after       = COMMAND
  left        = COMMAND
  right       = COMMAND
  inherits: \setupbtx
2 REFERENCE
```

```
\listcitation [...1...][...2]
1 default category entry short page num textnum year index tag keywords author authoryears authornum authoryear
2 REFERENCE
```

```
\listcitation [...1...][...2...]
1 reference = REFERENCE
  alternative = default category entry short page num textnum year index tag keywords author authoryears authornum
                authoryear
  before      = COMMAND
  after       = COMMAND
  left        = COMMAND
  right       = COMMAND
  inherits: \setupbtx
2 KEY = VALUE
```

```
\listcite [...1...][...2]
1 reference = REFERENCE
  alternative = default category entry short page num textnum year index tag keywords author authoryears authornum
                authoryear
  before      = COMMAND
  after       = COMMAND
  left        = COMMAND
  right       = COMMAND
  inherits: \setupbtx
2 REFERENCE
```

```
\listcite [...1...][...2]
1 default category entry short page num textnum year index tag keywords author authoryears authornum authoryear
2 REFERENCE
```

```
\listcite [...1...][...2...]
1 reference = REFERENCE
  alternative = default category entry short page num textnum year index tag keywords author authoryears authornum
                authoryear
  before      = COMMAND
  after       = COMMAND
  left        = COMMAND
  right       = COMMAND
  inherits: \setupbtx
2 KEY = VALUE
```

```
\listlength
```

```
\listnamespaces
```

```
\llap {...}
* CONTENT
```

```
\loadanyfile [...]
* FILE
```

```
\loadanyfileonce [...]
* FILE
```

```
\loadbtxdefinitionfile [...]
* FILE
```

\loadbtxreplacementfile [...] * FILE
\loadcldfile [...] * FILE
\loadcldfileonce [...] * FILE
\loadfontgoodies [...] * FILE
\loadluafile [...] * FILE
\loadluafileonce [...] * FILE
\loadspellchecklist [...] <sup>1</sup> [...] <sup>2</sup> 1 NAME 2 FILE
\loadtexfile [...] * FILE
\loadtexfileonce [...] * FILE
\loadtypescriptfile [...] * FILE
\localframed [...] <sup>1</sup> [...] <sup>2</sup> <sub>OPT</sub> {...} <sup>3</sup> 1 NAME 2 inherits: \setupframed 3 CONTENT
\localframedwithsettings [...] <sup>1</sup> [...] <sup>2</sup> <sub>OPT</sub> {...} <sup>3</sup> 1 NAME 2 inherits: \setupframed 3 CONTENT
\localhsize
\localpopbox ... * CSNAME NUMBER
\localpopmacro \... * CSNAME
\localpushbox ... * CSNAME NUMBER
\localpushmacro \... * CSNAME
\localundefine {...} * NAME

<code>\locatedfilepath</code>
<code>\locatefilepath {...}</code> *    FILE
<code>\locfilename {...}</code> *    FILE
<code>\lohi [...]<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup></code> 1    left <u>right</u> <sup>OPT</sup> 2    CONTENT 3    CONTENT
<code>\lomihi {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup></code> 1    CONTENT 2    CONTENT 3    CONTENT
<code>\low {...}</code> *    CONTENT
<code>\lowerbox {...} \...<sup>2</sup> {...}<sup>3</sup></code> 1    DIMENSION 2    CSNAME 3    CONTENT
<code>\lowercased {...}</code> *    TEXT
<code>\lowercasestring ... \to \...<sup>2</sup></code> 1    TEXT 2    CSNAME
<code>\lowerleftdblquote</code>
<code>\lowerleftsnglquote</code>
<code>\lowerrightdblquote</code>
<code>\lowerrightsnglquote</code>
<code>\LOWHIGH [...]<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup></code> 1    left <u>right</u> <sup>OPT</sup> 2    CONTENT 3    CONTENT
<code>\LOWMIDHIGH {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup></code> 1    CONTENT 2    CONTENT 3    CONTENT
<code>\LOW {...}</code> *    CONTENT <b>instances:</b> unitslow
<code>\unitslow {...}</code> *    CONTENT

<code>\lrbbox {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...} {<sup>5</sup>...}</code> 1    DIMENSION 2    DIMENSION 3    DIMENSION 4    DIMENSION 5    CONTENT
<code>\ltop <sup>1</sup>... {<sup>2</sup>...}</code> 1    TEXT <sup>OPT</sup> 2    CONTENT
<code>\luacode {<sup>*</sup>...}</code> *    COMMAND
<code>\luaconditional \<sup>*</sup>...</code> *    CSNAME
<code>\luaenvironment ...</code> *    FILE
<code>\luaexpanded {<sup>*</sup>...}</code> *    COMMAND
<code>\luaexpr {<sup>*</sup>...}</code> *    CONTENT
<code>\luafunction {<sup>*</sup>...}</code> *    COMMAND
<code>\luajitTeX</code>
<code>\luamajorversion</code>
<code>\luaminorversion</code>
<code>\luaparameterset {<sup>1</sup>...} {<sup>2</sup>...}</code> 1    NAME 2    CONTENT
<code>\luasetup {<sup>*</sup>...}</code> *    NAME
<code>\luaTeX</code>
<code>\luaversion</code>
<code>\METAFONT</code>
<code>\METAFUN</code>
<code>\METAPOST</code>
<code>\MetaFont</code>
<code>\MetaFun</code>
<code>\MetaPost</code>

<code>\MKII</code>
<code>\MKIV</code>
<code>\MKIX</code>
<code>\MKVI</code>
<code>\MKXI</code>
<code>\MONTH {..}</code> *    NUMBER
<code>\MONTHLONG {..}</code> *    NUMBER
<code>\MONTHSHORT {..}</code> *    NUMBER
<code>\MPanchor {..}</code> *    NAME
<code>\MPbetex {..}</code> *    NAME
<code>\MPc {..}</code> *    NAME
<code>\MPcode {..<sup>1</sup>} {..<sup>2</sup>}</code> 1    NAME        OPT 2    CONTENT
<code>\MPcolor {..}</code> *    COLOR
<code>\MPcoloronly {..}</code> *    COLOR
<code>\MPcolumn {..}</code> *    NAME
<code>\MPd {..}</code> *    NAME
<code>\MPdrawing {..}</code> *    CONTENT
<code>\MPfontsizehskip {..}</code> *    FONT
<code>\MPgetmultipars {..<sup>1</sup>} {..<sup>2</sup>}</code> 1    NAME 2    NAME
<code>\MPgetmultishape {..<sup>1</sup>} {..<sup>2</sup>}</code> 1    NAME 2    NAME

\MPgetposboxes {... <sup>1</sup> ,...} {... <sup>2</sup> } 1 NAME 2 NAME
\MPph {...} * NAME
\MPII
\MPIV
\MPinclusions [... <sup>1</sup> ] {... <sup>2</sup> } {... <sup>3</sup> } 1 + OPT OPT 2 NAME 3 CONTENT
\MPleftskip {...} * NAME
\MPll {...} * NAME
\MPlr {...} * NAME
\MPls {...} * NAME
\MPmenubuttons {...} * NAME
\MPn {...} * NAME
\MPoptions {...} * COLOR
\MPoverlayanchor {...} * NAME
\MPp {...} * NAME
\MPpage {...} * NAME
\MPpardata {...} * NAME
\MPplus {... <sup>1</sup> } {... <sup>2</sup> } {... <sup>3</sup> } 1 NAME 2 NUMBER 3 CONTENT
\MPpos {...} * NAME

\MPpositiongraphic {...} {..., <sup>2</sup> ...,...} 1 NAME OPT 2 KEY = VALUE
\MPposset {...} * NAME
\MPr {...} * NAME
\MPrawvar {...} {...} 1 NAME 2 KEY
\MPregion {...} * NAME
\MPrest {...} {...} 1 NAME 2 CONTENT
\MPrightskip {...} * NAME
\MPrs {...} * NAME
\MPstring {...} * NAME
\MPtext {...} * NAME
\MPtransparency {...} * COLOR
\MPul {...} * NAME
\MPur {...} * NAME
\MPVI
\MPv {...} {...} {...} 1 NAME 2 NUMBER 3 CONTENT
\MPvar {...} * KEY
\MPvariable {...} * KEY
\MPvv {...} {...} 1 NAME 2 CONTENT

\MPw {...} * NAME
\MPwhd {...} * NAME
\MPx {...} * NAME
\MPxy {...} * NAME
\MPxywhd {...} * NAME
\MPy {...} * NAME
\m [...] <sup>1</sup> {...} <sup>2</sup> 1 NAME 2 CONTENT
\mainlanguage [...] * LANGUAGE
\makecharacteractive ... * CHARACTER
\makerawcommalist [...] <sup>1</sup> , [...] <sup>2</sup> \... 1 COMMAND 2 CSNAME
\makestrutofbox ... * CSNAME NUMBER
\mapfontsize [...] <sup>1</sup> [...] <sup>2</sup> 1 DIMENSION 2 DIMENSION
\margindata [...] <sup>1</sup> [...] <sup>2</sup> , [...] <sup>3</sup> , [...] <sup>4</sup> {...} 1 NAME 2 reference = REFERENCE inherits: \setupmargindata 3 inherits: \setupmarginframed 4 CONTENT
\MARGINDATA [...] <sup>1</sup> , [...] <sup>2</sup> , [...] <sup>3</sup> {...} 1 reference = REFERENCE inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT instances: inleftmargin inrightmargin inoutermargin ininnermargin inleftedge inrightedge inouteredge ininneredge atleftmargin atrightmargin inleft inright inouter ininner inmargin inother margintext
\atleftmargin [...] <sup>1</sup> , [...] <sup>2</sup> , [...] <sup>3</sup> {...} 1 reference = REFERENCE inherits: \setupmargindata 2 inherits: \setupmarginframed 3 CONTENT



```

\atrightmargin [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 reference = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\ininner [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 reference = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\ininneredge [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 reference = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\ininnermargin [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 reference = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inleft [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 reference = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inleftedge [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 reference = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inleftmargin [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 reference = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inmargin [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 reference = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inother [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 reference = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inouter [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 reference = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

```

\inouteredge [...,\stackrel{1}{=},...] [...,\stackrel{2}{=},...] {\stackrel{3}{.}}
1 reference = REFERENCEOPT
inherits: \setupmargindata
2 inherits: \setupmarginframed
3 CONTENT

```

$\backslash inoutermargin$ [ $\dots$ , $\dots$ , $\overset{1}{=}\dots$ , $\dots$ ] [ $\dots$ , $\dots$ , $\overset{2}{=}\dots$ , $\dots$ ] $\{\dots\}$ 1    reference = REFERENCE <sup>OPT</sup> inherits: \setupmargindata 2    inherits: \setupmarginframed 3    CONTENT
$\backslash inright$ [ $\dots$ , $\dots$ , $\overset{1}{=}\dots$ , $\dots$ ] [ $\dots$ , $\dots$ , $\overset{2}{=}\dots$ , $\dots$ ] $\{\dots\}$ 1    reference = REFERENCE <sup>OPT</sup> inherits: \setupmargindata 2    inherits: \setupmarginframed 3    CONTENT
$\backslash inrightedge$ [ $\dots$ , $\dots$ , $\overset{1}{=}\dots$ , $\dots$ ] [ $\dots$ , $\dots$ , $\overset{2}{=}\dots$ , $\dots$ ] $\{\dots\}$ 1    reference = REFERENCE <sup>OPT</sup> inherits: \setupmargindata 2    inherits: \setupmarginframed 3    CONTENT
$\backslash inrightmargin$ [ $\dots$ , $\dots$ , $\overset{1}{=}\dots$ , $\dots$ ] [ $\dots$ , $\dots$ , $\overset{2}{=}\dots$ , $\dots$ ] $\{\dots\}$ 1    reference = REFERENCE <sup>OPT</sup> inherits: \setupmargindata 2    inherits: \setupmarginframed 3    CONTENT
$\backslash margintext$ [ $\dots$ , $\dots$ , $\overset{1}{=}\dots$ , $\dots$ ] [ $\dots$ , $\dots$ , $\overset{2}{=}\dots$ , $\dots$ ] $\{\dots\}$ 1    reference = REFERENCE <sup>OPT</sup> inherits: \setupmargindata 2    inherits: \setupmarginframed 3    CONTENT
$\backslash markcontent$ [ $\overset{1}{\dots}$ ] $\{\overset{2}{\dots}\}$ 1    reset <u>all</u> NAME <sup>OPT</sup> 2    CONTENT
$\backslash markedpages$ [ $\dots$ ] *    NAME
$\backslash marking$ ( $\dots$ , $\overset{1}{\dots}$ ) ( $\dots$ , $\overset{2}{\dots}$ ) [ $\overset{3}{\dots}$ ] 1    POSITION 2    POSITION 3    REFERENCE
$\backslash markinjector$ [ $\dots$ ] *    NAME
$\backslash markpage$ [ $\overset{1}{\dots}$ ] [ $\dots$ , $\overset{2}{\dots}$ , $\dots$ ] 1    NAME <sup>OPT</sup> 2    [-+]NUMBER
$\backslash mat$ $\{\overset{*}{\dots}\}$ *    CONTENT
$\backslash math$ [ $\overset{1}{\dots}$ ] $\{\overset{2}{\dots}\}$ 1    NAME <sup>OPT</sup> 2    CONTENT
$\backslash mathbf$
$\backslash mathbi$
$\backslash mathblackboard$

<code>\mathbs</code>
$\backslash\text{MATHCOMMAND}$ $\{.^1..\}$ $\{.^2..\}$ 1    TEXT                    OPT            OPT 2    TEXT
<code>\mathdefault</code>
$\backslash\text{mathdouble}$ $[.^1..]$ $\{.^2..\}$ $\{.^3..\}$ $\{.^4..\}$ 1    both vfenced    OPT 2    NUMBER 3    TEXT 4    TEXT
$\backslash\text{MATHDOUBLEEXTENSIBLE}$ $\{.^1..\}$ $\{.^2..\}$ 1    TEXT 2    TEXT instances: doublebar doublebrace doubleparent doublebracket overbarunderbar overbraceunderbrace overparentunderparent overbracketunderbracket
$\backslash\text{doublebar}$ $\{.^1..\}$ $\{.^2..\}$ 1    TEXT 2    TEXT
$\backslash\text{doublebrace}$ $\{.^1..\}$ $\{.^2..\}$ 1    TEXT 2    TEXT
$\backslash\text{doublebracket}$ $\{.^1..\}$ $\{.^2..\}$ 1    TEXT 2    TEXT
$\backslash\text{doubleparent}$ $\{.^1..\}$ $\{.^2..\}$ 1    TEXT 2    TEXT
$\backslash\text{overbarunderbar}$ $\{.^1..\}$ $\{.^2..\}$ 1    TEXT 2    TEXT
$\backslash\text{overbraceunderbrace}$ $\{.^1..\}$ $\{.^2..\}$ 1    TEXT 2    TEXT
$\backslash\text{overbracketunderbracket}$ $\{.^1..\}$ $\{.^2..\}$ 1    TEXT 2    TEXT
$\backslash\text{overparentunderparent}$ $\{.^1..\}$ $\{.^2..\}$ 1    TEXT 2    TEXT
$\backslash\text{mathematics}$ $[.^1..]$ $\{.^2..\}$ 1    NAME                    OPT 2    CONTENT

`\MATHEXTENSIBLE {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

instances: xrel xequal xleftarrow xrightarrow xleftrightharrow xLeftarrow xRightarrow  
xleftrightharpoon xtwoheadleftarrow xtwoheadrightarrow xmapsto xhookleftarrow xhookrightarrow  
xleftharpoondown xleftharpoonup xrightarpoon xrightarpoonup xrightoverleftarrow  
xleftrightharpoons xrightleftharpoons xtriplerel mrel mequal mleftarrow mrightarrow mleftrightharpoon  
mLeftarrow mRightarrow mLeftrightharpoon mtwoheadleftarrow mtwoheadrightarrow mmapsto mhookleftarrow  
mhookrightarrow mleftharpoondown mleftharpoonup mrightarpoon mrightarpoonup mrightoverleftarrow  
mleftrightharpoons mrightleftharpoons mtriplerel eleftrightarrowfill erightarrowfill eleftrightarrowfill  
etwoheadrightarrowfill eleftharpoondownfill eleftharpoonupfill erightharpoondownfill  
erightharpoonupfill eoverbarfill eunderbarfill eoverbracefill eunderbracefill eoverparentfill  
eunderparentfill eoverbracketfill eunderbracketfill trel tequal tmapsto tleftarrow trightarrow  
tleftrightarrow tLeftarrow tRightarrow tleftrightharpoon ttwoheadleftarrow ttwoheadrightarrow  
thookleftarrow thookrightarrow tleftharpoondown tleftharpoonup trightharpoondown trightharpoonup  
trightoverleftarrow tleftrightharpoons trightleftharpoons ttriplerel cleftarrow crightarrow  
crightoverleftarrow

`\cleftarrow {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\crightarrow {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\crightoverleftarrow {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\eleftrightarrowfill {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\eleftharpoondownfill {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\eleftharpoonupfill {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\eleftrightarrowfill {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\eoverbarfill {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\eoverbracefill {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\eoverbracketfill {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\eoverparentfill {...} {...}`

1 TEXT

OPT

OPT

2 TEXT

`\erightarrowfill {...} {...}`

1    TEXT                    OPT            OPT  
2    TEXT

`\erightharpoondownfill {...} {...}`

1    TEXT                    OPT            OPT  
2    TEXT

`\erightharpoonupfill {...} {...}`

1    TEXT                    OPT            OPT  
2    TEXT

`\etwoheadrightarrowfill {...} {...}`

1    TEXT                    OPT            OPT  
2    TEXT

`\eunderbarfill {...} {...}`

1    TEXT                    OPT            OPT  
2    TEXT

`\eunderbracefill {...} {...}`

1    TEXT                    OPT            OPT  
2    TEXT

`\eunderbracketfill {...} {...}`

1    TEXT                    OPT            OPT  
2    TEXT

`\eunderparentfill {...} {...}`

1    TEXT                    OPT            OPT  
2    TEXT

`\mequal {...} {...}`

1    TEXT            OPT            OPT  
2    TEXT

`\mhookleftarrow {...} {...}`

1    TEXT                    OPT            OPT  
2    TEXT

`\mhookrightarrow {...} {...}`

1    TEXT                    OPT            OPT  
2    TEXT

`\mLeftarrow {...} {...}`

1    TEXT                    OPT            OPT  
2    TEXT

`\mLeftrightarrow {...} {...}`

1    TEXT                    OPT            OPT  
2    TEXT

`\mleftarrow {...} {...}`

1    TEXT                    OPT            OPT  
2    TEXT

`\mleftharpoondown {...} {...}`

1    TEXT                    OPT            OPT  
2    TEXT

`\mleftharpoonup {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\mleftrightharpoonup {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\mleftrightharpoons {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\mmapsto {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\mRightharpoonup {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\mrel {...} {...}`

1    TEXT    OPT            OPT

2    TEXT

`\mrightarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\mrightharpoondown {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\mrightharpoonup {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\mrightharpoons {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\mrightharpoonoverleftarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\mtriplerel {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\mtwoheadleftarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\mtwoheadrightarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tequal {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\thookleftarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\thookrightarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tleftarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tlefttrightharpoonarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tleftarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tleftharpoontdown {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tleftharpoonup {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tleftrightarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tleftrightharpoons {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\tmapsto {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\trightarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\trrel {...} {...}`

1    TEXT    OPT            OPT

2    TEXT

`\rightarrow {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\trightharpoontdown {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\trightharpoonup {...} {...}`

1    TEXT                    OPT            OPT

2    TEXT

`\trigtlleftharpoons {...} {...}`  
1    TEXT                      OPT            OPT  
2    TEXT

`\trightoverleftarrow {...} {...}`  
1    TEXT                      OPT            OPT  
2    TEXT

`\ttriplerel {...} {...}`  
1    TEXT                      OPT            OPT  
2    TEXT

`\twoheadleftarrow {...} {...}`  
1    TEXT                      OPT            OPT  
2    TEXT

`\twoheadrightarrow {...} {...}`  
1    TEXT                      OPT            OPT  
2    TEXT

`\xequal {...} {...}`  
1    TEXT                      OPT            OPT  
2    TEXT

`\xhookleftarrow {...} {...}`  
1    TEXT                      OPT            OPT  
2    TEXT

`\xhookrightarrow {...} {...}`  
1    TEXT                      OPT            OPT  
2    TEXT

`\xLeftarrow {...} {...}`  
1    TEXT                      OPT            OPT  
2    TEXT

`\xLeftrightarrow {...} {...}`  
1    TEXT                      OPT            OPT  
2    TEXT

`\xleftarrow {...} {...}`  
1    TEXT                      OPT            OPT  
2    TEXT

`\xleftharpoondown {...} {...}`  
1    TEXT                      OPT            OPT  
2    TEXT

`\xleftharpoonup {...} {...}`  
1    TEXT                      OPT            OPT  
2    TEXT

`\xleftrightharpoonup {...} {...}`  
1    TEXT                      OPT            OPT  
2    TEXT

`\xleftrightharpoons {...} {...}`  
1    TEXT                      OPT            OPT  
2    TEXT



`\xmapsto {...} {...}`

1 TEXT OPT OPT  
2 TEXT

`\xrightarrow {...} {...}`

1 TEXT OPT OPT  
2 TEXT

`\xrel {...} {...}`

1 TEXT OPT OPT  
2 TEXT

`\xrightarrow {...} {...}`

1 TEXT OPT OPT  
2 TEXT

`\xrightarrowtharpoondown {...} {...}`

1 TEXT OPT OPT  
2 TEXT

`\xrightarrowtharpoonup {...} {...}`

1 TEXT OPT OPT  
2 TEXT

`\xrightarrowleftharpoons {...} {...}`

1 TEXT OPT OPT  
2 TEXT

`\xrightarrowoverleftarrow {...} {...}`

1 TEXT OPT OPT  
2 TEXT

`\xtriplerel {...} {...}`

1 TEXT OPT OPT  
2 TEXT

`\twoheadleftarrow {...} {...}`

1 TEXT OPT OPT  
2 TEXT

`\twoheadrightarrow {...} {...}`

1 TEXT OPT OPT  
2 TEXT

`\mathfraktur`

`\MATHFRAMED [...,\stackrel{1}{=},...] {...}`

1 inherits: \setupmathframed  
2 CONTENT  
instances: mframed inmframed mcframed

`\inmframed [...,\stackrel{1}{=},...] {...}`

1 inherits: \setupmathframed  
2 CONTENT

`\mcframed [...,\stackrel{1}{=},...] {...}`

1 inherits: \setupmathframed  
2 CONTENT

$$\mframe{[\dots,\dots^1\dots,\dots]} \{\dots^2\}$$
 $\mathbf{\operatorname{function}} \{...\}$  $\mathit$  $\mathbf{\mathit{}}$ 
$$\backslash MATHEMATICS \{..*\}$$
 $\mathop{\{...\}}^*$  $\backslash\mathrm{MATHORNAMENT}\{...\}$ 
$$\mathop{\mathrm{over}}\limits [ \overset{1}{. . .} ] \{ \overset{2}{. . .} \} \{ \overset{3}{. . .} \}$$
 $\backslash\mathrm{MATHOVEREXTENSIBLE}\{\dots\}$  $\text{\textit{\texttt{\textbackslash MATHOVERTEXTTEXTENSIBLE}}}\{\dots\}\{\dots\}$  $\sqrt{[...]} \{...\}$  $\mathrm$  $\mathcal{M}$  $\backslash\mathrm{mathsl}$  $\mathbb{S}$ 
$$\text{\texttt{\textbackslash mathtext}} \dots \{ \dots \}$$
$$\mathbf{\dots}^1 \{ \dots \}^2$$
 $\mathtt{\text{bi}} \dots \{ \dots \}$

$\backslash\mathtextbs \dots \{...\}$ 1    TEXT            OPT 2    TEXT
$\backslash\mathtextit \dots \{...\}$ 1    TEXT            OPT 2    TEXT
$\backslash\mathtextsl \dots \{...\}$ 1    TEXT            OPT 2    TEXT
$\backslash\mathtexttf \dots \{...\}$ 1    TEXT            OPT 2    TEXT
$\backslash\mathtf$
$\backslash\mathtripler [\dots] \{...\} \{...\} \{...\}$ 1    NAME            OPT            OPT            OPT            OPT 2    TEXT 3    TEXT 4    TEXT
$\backslash\mathtriplet [\dots] \{...\} \{...\} \{...\}$ 1    NAME            OPT            OPT            OPT            OPT 2    TEXT 3    TEXT 4    TEXT
$\backslash\mathtt$
$\backslash\mathunder [\dots] \{...\} \{...\}$ 1    bottom vfence $\mathbb{F}$ 2    NUMBER 3    TEXT
$\backslash\mathunderextensible \{...\}$ *    TEXT
$\backslash\mathunderextextensible \{...\} \{...\}$ 1    TEXT 2    TEXT instances:
$\backslash\mathunstacked$
$\backslash\mathupright$
$\backslash\mathword \dots \{...\}$ 1    TEXT            OPT 2    TEXT
$\backslash\mathwordbf \dots \{...\}$ 1    TEXT            OPT 2    TEXT
$\backslash\mathwordbi \dots \{...\}$ 1    TEXT            OPT 2    TEXT

$\backslash\mathwordbs \dots^{1}\{...\}$ 1 TEXT OPT 2 TEXT
$\backslash\mathwordit \dots^{1}\{...\}$ 1 TEXT OPT 2 TEXT
$\backslash\mathwordsl \dots^{1}\{...\}$ 1 TEXT OPT 2 TEXT
$\backslash\mathwordtf \dots^{1}\{...\}$ 1 TEXT OPT 2 TEXT
$\backslash\maxaligned \{...\}$ * CONTENT
$\backslash\mbox \{...\}$ * CONTENT
$\backslash\measure \{...\}$ * NAME
$\backslash\measured \{...\}$ * NAME
$\backslash\medskip$
$\backslash\medspace$
$\backslash\menubutton [\dots^{1}\dots] \{...\} \{...\}$ 1 inherits: \setupbutton 2 TEXT 3 REFERENCE
$\backslash\menubutton [\dots^{1}] [\dots^{2}\dots] \{...\} \{...\}$ 1 NAME OPT 2 inherits: \setupinteractionmenu 3 TEXT 4 REFERENCE
$\backslash\message \{...\}$ * TEXT
$\backslash\metaTeX$
$\backslash\mfence \{...\}$ * CHARACTER
$\backslash\mfunction \{...\}$ * CONTENT
$\backslash\mfunctionlabeltext \{...\}$ * NAME
$\backslash\mhbox \{...\}$ * CONTENT

<code>\midaligned {...}</code> *    CONTENT
<code>\middle ...</code> *    CHARACTER
<code>\middlealigned {...}</code> *    CONTENT
<code>\middlebox {...}</code> *    CONTENT
<code>\midhbox {...}</code> *    CONTENT
<code>\midsubsentence</code>
<code>\minimalhbox ...<sup>1</sup> {...<sup>2</sup>}</code> 1    TEXT            OPT 2    CONTENT
<code>\mirror {...}</code> *    CONTENT
<code>\mixedcaps {...}</code> *    TEXT
<code>\mkvibuffer [...<sup>*</sup>]</code> *    BUFFER            OPT
<code>\moduleparameter {...<sup>1</sup>} {...<sup>2</sup>}</code> 1    FILE 2    KEY
<code>\molecule {...}</code> *    CONTENT
<code>\mono</code>
<code>\monobold</code>
<code>\mononormal</code>
<code>\month {...}</code> *    NUMBER
<code>\monthlong {...}</code> *    NUMBER
<code>\monthshort {...}</code> *    NUMBER
<code>\mprandomnumber</code>
<code>\mtext {...}</code> *    CONTENT

<code>\NormalizeFontHeight \...<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup></code> 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT
<code>\NormalizeFontWidth \...<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup></code> 1 CSNAME 2 TEXT 3 DIMENSION 4 FONT
<code>\NormalizeTextHeight {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup></code> 1 FONT 2 DIMENSION 3 TEXT
<code>\NormalizeTextWidth {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup></code> 1 FONT 2 DIMENSION 3 TEXT
<code>\Numbers {...}</code> * NUMBER
<code>\namedheadnumber {...}</code> * SECTION
<code>\namedstructureheadlocation {...}</code> * SECTION
<code>\namedstructureuservariable {...}<sup>1</sup> {...}<sup>2</sup></code> 1 SECTION 2 KEY
<code>\namedstructurevariable {...}<sup>1</sup> {...}<sup>2</sup></code> 1 SECTION 2 KEY
<code>\namedtaggedlabeltexts {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup> {...}<sup>4</sup> {...}<sup>5</sup></code> 1 NAME 2 NAME 3 NAME 4 NAME 5 CONTENT
<code>\naturalhbox ...<sup>1</sup> {...}<sup>2</sup></code> 1 TEXT OPT 2 CONTENT
<code>\naturalhpack ...<sup>1</sup> {...}<sup>2</sup></code> 1 TEXT OPT 2 CONTENT
<code>\naturalvbox ...<sup>1</sup> {...}<sup>2</sup></code> 1 TEXT OPT 2 CONTENT
<code>\naturalvcenter ...<sup>1</sup> {...}<sup>2</sup></code> 1 TEXT OPT 2 CONTENT

$\backslash\text{naturalvpack} \dots \overset{1}{\{...\}}$ 1    TEXT                    OPT 2    CONTENT
$\backslash\text{naturalvtop} \dots \overset{1}{\{...\}}$ 1    TEXT                    OPT 2    CONTENT
$\backslash\text{naturalwd} \dots$ *    CSNAME NUMBER
$\backslash\text{negatecolorbox} \dots$ *    CSNAME NUMBER
$\backslash\text{negated} \{...\}$ *    TEXT
$\backslash\text{negemspace}$
$\backslash\text{negenspace}$
$\backslash\text{negthinspace}$
$\backslash\text{newattribute} \backslash\dots$ *    CSNAME
$\backslash\text{newcatcodetable} \backslash\dots$ *    CSNAME
$\backslash\text{newcounter} \backslash\dots$ *    CSNAME
$\backslash\text{newevery} \backslash\dots \backslash\dots$ 1    CSNAME 2    CSNAME
$\backslash\text{newfrenchspacing}$
$\backslash\text{newmode} \{...\}$ *    NAME
$\backslash\text{newsignal} \backslash\dots$ *    CSNAME
$\backslash\text{newsystemmode} \{...\}$ *    NAME
$\backslash\text{nextbox}$
$\backslash\text{nextboxdp}$
$\backslash\text{nextboxht}$
$\backslash\text{nextboxhtdp}$
$\backslash\text{nextboxwd}$

<code>\nextcounter [...] [...]</code> 1 NAME OPT 2 NUMBER
<code>\nextcountervalue [...]</code> * NAME
<code>\nextdepth</code>
<code>\nextparagraphs</code>
<code>\nextPARAGRAPHS</code>
<code>\nextrealpage</code>
<code>\nextrealpagenumber</code>
<code>\nextsubcountervalue [...] [...]</code> 1 NAME 2 NUMBER
<code>\nextsubpage</code>
<code>\nextsubpagenumber</code>
<code>\nextuserpage</code>
<code>\nextuserpagenumber</code>
<code>\nocharacteralign</code>
<code>\nocitation [...]</code> * REFERENCE
<code>\nocitation {...}</code> * REFERENCE
<code>\nocite [...]</code> * REFERENCE
<code>\nocite {...}</code> * REFERENCE
<code>\nodetostring \... {...}</code> 1 CSNAME 2 CONTENT
<code>\nofffigurepages</code>
<code>\noflines</code>
<code>\noflocalfloats</code>
<code>\noheaderandfooterlines</code>



<code>\noheightstrut</code>
<code>\noindentation</code>
<code>\noitem</code>
<code>\nonfrenchspacing</code>
<code>\nonmathematics {...}</code> *    CONTENT
<code>\normal</code>
<code>\normalboldface</code>
<code>\normalframedwithsettings [...,\stackrel{1}{...},...] {...}</code> 1    inherits: \setupframed 2    CONTENT
<code>\normalitalicface</code>
<code>\normalizebodyfontsize \stackrel{1}{...} {...}</code> 1    CSNAME 2    DIMENSION
<code>\normalizedfontsize</code>
<code>\normalizefontdepth \stackrel{1}{...} {...} {...} {...}</code> 1    CSNAME 2    TEXT 3    DIMENSION 4    FONT
<code>\normalizefontheight \stackrel{1}{...} {...} {...} {...}</code> 1    CSNAME 2    TEXT 3    DIMENSION 4    FONT
<code>\normalizefontline \stackrel{1}{...} {...} {...} {...}</code> 1    CSNAME 2    TEXT 3    DIMENSION 4    FONT
<code>\normalizefontwidth \stackrel{1}{...} {...} {...} {...}</code> 1    CSNAME 2    TEXT 3    DIMENSION 4    FONT
<code>\normalizetextdepth {...} {...} {...}</code> 1    FONT 2    DIMENSION 3    TEXT
<code>\normalizetextheight {...} {...} {...}</code> 1    FONT 2    DIMENSION 3    TEXT

<pre> \normalizetextline {...} {...} {...} 1  FONT 2  DIMENSION 3  TEXT </pre>
<pre> \normalizetextwidth {...} {...} {...} 1  FONT 2  DIMENSION 3  TEXT </pre>
<pre> \normalslantedface </pre>
<pre> \normaltypeface </pre>
<pre> \nospace </pre>
<pre> \note [...<sup>1</sup>] [...<sup>2</sup>] 1  NAME <sup>OPT</sup> 2  REFERENCE </pre>
<pre> \notesymbol [...<sup>1</sup>] [...<sup>2</sup>] 1  NAME <sup>OPT</sup> 2  REFERENCE </pre>
<pre> \NOTE [...<sup>1</sup>,...<sup>2</sup>] {...} 1  REFERENCE<sup>OPT</sup> 2  TEXT instances: footnote endnote </pre>
<pre> \NOTE [...,*...<sup>*</sup>,...] *  title      = TEXT    bookmark   = TEXT    list       = TEXT    reference  = REFERENCE instances: footnote endnote </pre>
<pre> \endnote [...,*...<sup>*</sup>,...] *  title      = TEXT    bookmark   = TEXT    list       = TEXT    reference  = REFERENCE </pre>
<pre> \footnote [...,*...<sup>*</sup>,...] *  title      = TEXT    bookmark   = TEXT    list       = TEXT    reference  = REFERENCE </pre>
<pre> \endnote [...<sup>1</sup>,...<sup>2</sup>] {...} 1  REFERENCE <sup>OPT</sup> 2  TEXT </pre>
<pre> \footnote [...<sup>1</sup>,...<sup>2</sup>] {...} 1  REFERENCE <sup>OPT</sup> 2  TEXT </pre>
<pre> \notopandbottomlines </pre>
<pre> \notragged </pre>
<pre> \notsmallcapped {...} *  TEXT </pre>

<code>\ntimes {...} {...}</code> 1    TEXT 2    NUMBER
<code>\numberofpoints {...}</code> *    DIMENSION
<code>\numbers {...}</code> *    NUMBER
<code>\obeydepth</code>
<code>\objectdepth</code>
<code>\objectheight</code>
<code>\objectmargin</code>
<code>\objectwidth</code>
<code>\obox {...}</code> *    CONTENT
<code>\offset [...,\overset{1}{...}] {...}</code> 1    inherits: \setupoffset 2    CONTENT
<code>\offsetbox [...,\overset{1}{...}] \overset{2}{...} {...}</code> 1    inherits: \setupoffsetbox 2    CSNAME 3    CONTENT
<code>\onedigitrounding {...}</code> *    NUMBER
<code>\ordinaldaynumber {...}</code> *    NUMBER
<code>\ordinalstr {...}</code> *    TEXT
<code>\ornamenttext [...,\overset{1}{...}] [...,\overset{2}{...}] {...} {...}</code> 1    alternative = <u>a</u> <u>b</u> <span style="float: right;">OPT</span> inherits: \setupcollector 2    style = STYLE COMMAND color = COLOR inherits: \setupframed 3    TEXT 4    CONTENT
<code>\ornamenttext [...] {...} {...}</code> 1    NAME 2    TEXT 3    CONTENT
<code>\ornamenttext [...,\overset{1}{...}] [...,\overset{2}{...}] {...} {...}</code> 1    alternative = <u>a</u> <u>b</u> <span style="float: right;">OPT</span> inherits: \setupplayer 2    inherits: \setuplayeredtext 3    TEXT 4    CONTENT

$\backslash ORNAMENT \{.^1.\} \{.^2.\}$ 1 TEXT 2 CONTENT
$\backslash outputfilename$
$\backslash outputstreambox [.^*.]$ * NAME
$\backslash outputstreamcopy [.^*.]$ * NAME
$\backslash outputstreamunvbox [.^*.]$ * NAME
$\backslash outputstreamunvcopy [.^*.]$ * NAME
$\backslash over [.^*.]$ * REFERENCE
$\backslash overlaybutton [.^*.]$ * REFERENCE
$\backslash overlaybutton \{.^*.\}$ * REFERENCE
$\backslash overlaycolor$
$\backslash overlaydepth$
$\backslash overlayfigure \{.^*.\}$ * FILE
$\backslash overlayheight$
$\backslash overlayimage \{.^*.\}$ * FILE
$\backslash overlaylinecolor$
$\backslash overlaylinewidth$
$\backslash overlayoffset$
$\backslash overlayrollbutton [.^1.] [.^2.]$ 1 REFERENCE 2 REFERENCE
$\backslash overlaywidth$
$\backslash overloaderror$
$\backslash overset \{.^1.\} \{.^2.\}$ 1 TEXT 2 TEXT



<p><code>\pagereference [...]*,...]</code></p> <p>*    REFERENCE</p>
<p><code>\pagestaterealpage {...} {...}</code></p> <p>1    NAME</p> <p>2    NAME NUMBER</p>
<p><code>\pagestaterealpageorder {...} {...}</code></p> <p>1    NAME</p> <p>2    NAME NUMBER</p>
<p><code>\paletsize</code></p>
<p><code>\PARAGRAPHS</code></p>
<p><code>\pdfactualtext {...} {...}</code></p> <p>1    CONTENT</p> <p>2    TEXT</p>
<p><code>\pdfbackendactualtext {...} {...}</code></p> <p>1    CONTENT</p> <p>2    TEXT</p>
<p><code>\pdfbackendcurrentresources</code></p>
<p><code>\pdfbackendsetcatalog {...} {...}</code></p> <p>1    NAME</p> <p>2    TEXT</p>
<p><code>\pdfbackendsetcolorspace {...} {...}</code></p> <p>1    NAME</p> <p>2    TEXT</p>
<p><code>\pdfbackendsettextgstate {...} {...}</code></p> <p>1    NAME</p> <p>2    TEXT</p>
<p><code>\pdfbackendsetinfo {...} {...}</code></p> <p>1    NAME</p> <p>2    TEXT</p>
<p><code>\pdfbackendsetname {...} {...}</code></p> <p>1    NAME</p> <p>2    TEXT</p>
<p><code>\pdfbackendsetpageattribute {...} {...}</code></p> <p>1    NAME</p> <p>2    TEXT</p>
<p><code>\pdfbackendsetpageresource {...} {...}</code></p> <p>1    NAME</p> <p>2    TEXT</p>
<p><code>\pdfbackendsetpagesattribute {...} {...}</code></p> <p>1    NAME</p> <p>2    TEXT</p>
<p><code>\pdfbackendsetpattern {...} {...}</code></p> <p>1    NAME</p> <p>2    TEXT</p>

<code>\pdfbackendsetshade {...} {...}</code> 1 NAME 2 TEXT
<code>\pdfcolor {...}</code> * NAME
<code>\pdfeTeX</code>
<code>\pdfTeX</code>
<code>\percent</code>
<code>\percentdimen {...} {...}</code> 1 DIMENSION CSNAME 2 DIMENSION NUMBER
<code>\periods [...]</code> * NUMBER <small>OPT</small>
<code>\periods [...,...<sup>*</sup>...,...]</code> * inherits: <small>OPT</small> \setupperiods
<code>\permitcaretescape</code>
<code>\permitcircumflexescape</code>
<code>\permitspacesbetweengroups</code>
<code>\persiandecimals {...}</code> * NUMBER
<code>\persiannumerals {...}</code> * NUMBER
<code>\phantom {...}</code> * CONTENT
<code>\phantombox [...,...<sup>*</sup>...,...]</code> * width = DIMENSION height = DIMENSION depth = DIMENSION
<code>\pickupgroupedcommand {...} {...} {...}</code> 1 COMMAND 2 COMMAND 3 COMMAND
<code>\placeattachments</code>
<code>\placebookmarks [...,<sup>1</sup>...] [...,<sup>2</sup>...] [...,<sup>3</sup>...,...]</code> 1 SECTION LIST <small>OPT</small> 2 SECTION LIST <small>OPT</small> 3 inherits: \setupbookmark <small>OPT</small>
<code>\placebtxrendering [...<sup>1</sup>] [...,<sup>2</sup>...,...]</code> 1 NAME <small>OPT</small> 2 inherits: \setupbtxrendering <small>OPT</small>

<p><code>\placecitation [...]</code></p> <p>* REFERENCE</p>
<p><code>\placecombinedlist [...]<sup>1</sup> [...,...<sup>2</sup>...,...]</code></p> <p>1 LIST</p> <p>2 inherits: \setupcombinedlist</p>
<p><code>\placeCOMBINEDLIST [...,...<sup>*</sup>...,...]</code></p> <p>* inherits: \setupcombinedlist<sup>OPT</sup></p> <p>instances: content</p>
<p><code>\placecontent [...,...<sup>*</sup>...,...]</code></p> <p>* inherits: \setupcombinedlist<sup>OPT</sup></p>
<p><code>\placecomments</code></p>
<p><code>\placecurrentformulanumber</code></p>
<p><code>\placedbox {...}</code></p> <p>* CONTENT</p>
<p><code>\placefloat [...]<sup>1</sup> [...,...<sup>2</sup>...,...]<sup>OPT</sup> [...,...<sup>3</sup>...,...]<sup>OPT</sup> {...<sup>4</sup>...} {...<sup>5</sup>...}</code></p> <p>1 SINGULAR</p> <p>2 split always left right inner outer backspace cutspace inleft inright inmargin leftmargin rightmargin leftedge rightedge innermargin outermargin inneredge outeredge text opposite reset height depth [-+]line halfline grid high low fit 90 180 270 nonumber none local here force margin [-+]hang hanging tall both middle offset top bottom auto page leftpage rightpage somewhere effective header footer</p> <p>3 REFERENCE</p> <p>4 TEXT</p> <p>5 CONTENT</p>
<p><code>\placefloatwithsetups [...]<sup>1</sup> [...,...<sup>2</sup>...,...]<sup>OPT</sup> [...,...<sup>3</sup>...,...]<sup>OPT</sup> {...<sup>4</sup>...} {...<sup>5</sup>...}</code></p> <p>1 NAME</p> <p>2 split always left right inner outer backspace cutspace inleft inright inmargin leftmargin rightmargin leftedge rightedge innermargin outermargin inneredge outeredge text opposite reset height depth [-+]line halfline grid high low fit 90 180 270 nonumber none local here force margin [-+]hang hanging tall both middle offset top bottom auto page leftpage rightpage somewhere effective header footer</p> <p>3 REFERENCE</p> <p>4 TEXT</p> <p>5 CONTENT</p>
<p><code>\placeFLOAT [...]<sup>1</sup> [...,...<sup>2</sup>...,...]<sup>OPT</sup> {...<sup>3</sup>...} {...<sup>4</sup>...}</code></p> <p>1 split always left<sup>OPT</sup>right inner<sup>OPT</sup>outer backspace cutspace inleft inright inmargin leftmargin rightmargin leftedge rightedge innermargin outermargin inneredge outeredge text opposite reset height depth [-+]line halfline grid high low fit 90 180 270 nonumber none local here force margin [-+]hang hanging tall both middle offset top bottom auto page leftpage rightpage somewhere effective header footer</p> <p>2 REFERENCE</p> <p>3 TEXT</p> <p>4 CONTENT</p> <p>instances: chemical figure table intermezzo graphic</p>
<p><code>\placechemical [...]<sup>1</sup> [...,...<sup>2</sup>...,...]<sup>OPT</sup> {...<sup>3</sup>...} {...<sup>4</sup>...}</code></p> <p>1 split always left<sup>OPT</sup>right inner<sup>OPT</sup>outer backspace cutspace inleft inright inmargin leftmargin rightmargin leftedge rightedge innermargin outermargin inneredge outeredge text opposite reset height depth [-+]line halfline grid high low fit 90 180 270 nonumber none local here force margin [-+]hang hanging tall both middle offset top bottom auto page leftpage rightpage somewhere effective header footer</p> <p>2 REFERENCE</p> <p>3 TEXT</p> <p>4 CONTENT</p>



`\placefigure [...1,...] [...2,...] {...3} {...4}`

1 split always left <sup>OPT</sup>right inner <sup>OPT</sup>outer backspace cutspace inleft inright inmargin leftmargin rightmargin leftedge  
rightedge innermargin outermargin inneredge outeredge text opposite reset height depth [-+]line halfline grid high  
low fit 90 180 270 nonumber none local here force margin [-+]hang hanging tall both middle offset top bottom auto  
page leftpage rightpage somewhere effective header footer  
2 REFERENCE  
3 TEXT  
4 CONTENT

`\placegraphic [...1,...] [...2,...] {...3} {...4}`

1 split always left <sup>OPT</sup>right inner <sup>OPT</sup>outer backspace cutspace inleft inright inmargin leftmargin rightmargin leftedge  
rightedge innermargin outermargin inneredge outeredge text opposite reset height depth [-+]line halfline grid high  
low fit 90 180 270 nonumber none local here force margin [-+]hang hanging tall both middle offset top bottom auto  
page leftpage rightpage somewhere effective header footer  
2 REFERENCE  
3 TEXT  
4 CONTENT

`\placeintermezzo [...1,...] [...2,...] {...3} {...4}`

1 split always left <sup>OPT</sup>right inner <sup>OPT</sup>outer backspace cutspace inleft inright inmargin leftmargin rightmargin leftedge  
rightedge innermargin outermargin inneredge outeredge text opposite reset height depth [-+]line halfline grid high  
low fit 90 180 270 nonumber none local here force margin [-+]hang hanging tall both middle offset top bottom auto  
page leftpage rightpage somewhere effective header footer  
2 REFERENCE  
3 TEXT  
4 CONTENT

`\placetable [...1,...] [...2,...] {...3} {...4}`

1 split always left <sup>OPT</sup>right inner <sup>OPT</sup>outer backspace cutspace inleft inright inmargin leftmargin rightmargin leftedge  
rightedge innermargin outermargin inneredge outeredge text opposite reset height depth [-+]line halfline grid high  
low fit 90 180 270 nonumber none local here force margin [-+]hang hanging tall both middle offset top bottom auto  
page leftpage rightpage somewhere effective header footer  
2 REFERENCE  
3 TEXT  
4 CONTENT

`\placefootnotes [...*,...] [...*,...]`

\* inherits: \setupnote <sup>OPT</sup>

`\placeformula [...1,...] {...2}`

1 + - REFERENCE <sup>OPT</sup> <sup>OPT</sup>  
2 TEXT

`\placeframed [...1] [...2,...2,...] {...3}`

1 NAME <sup>OPT</sup>  
2 inherits: \setupframed  
3 CONTENT

`\placeheadnumber [...]`

\* SECTION

`\placeheadtext [...]`

\* SECTION

`\placehelp`

`\placeinitial [...]`

\* NAME <sup>OPT</sup>

`\placelayer [...]`

\* NAME

$\backslash\text{placelayeredtext}$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sub>OPT</sub> ...] [ <sup>3</sup> ... <sub>OPT</sub> ...] { <sup>4</sup> ...} { <sup>5</sup> ...} 1 NAME 2 inherits: \setuplayer 3 inherits: \setuplayeredtext 4 TEXT 5 CONTENT
$\backslash\text{placelist}$ [... <sup>1</sup> ...] [... <sup>2</sup> ... <sub>OPT</sub> ...] 1 LIST 2 inherits: \setuplist
$\backslash\text{placelistofFLOATS}$ [... <sup>*</sup> ... <sub>OPT</sub> ...] * inherits: \setuplist instances: chemicals figures tables intermezzi graphics
$\backslash\text{placelistofchemicals}$ [... <sup>*</sup> ... <sub>OPT</sub> ...] * inherits: \setuplist
$\backslash\text{placelistoffigures}$ [... <sup>*</sup> ... <sub>OPT</sub> ...] * inherits: \setuplist
$\backslash\text{placelistofgraphics}$ [... <sup>*</sup> ... <sub>OPT</sub> ...] * inherits: \setuplist
$\backslash\text{placelistofintermezzi}$ [... <sup>*</sup> ... <sub>OPT</sub> ...] * inherits: \setuplist
$\backslash\text{placelistoftables}$ [... <sup>*</sup> ... <sub>OPT</sub> ...] * inherits: \setuplist
$\backslash\text{placelistofpublications}$ [ <sup>1</sup> ...] [... <sup>2</sup> ... <sub>OPT</sub> ...] 1 NAME 2 inherits: \setupbtxrendering
$\backslash\text{placelistofsorts}$ [ <sup>1</sup> ...] [... <sup>2</sup> ... <sub>OPT</sub> ...] 1 SINGULAR 2 inherits: \setupsorting
$\backslash\text{placelistofSORTS}$ [... <sup>*</sup> ... <sub>OPT</sub> ...] * inherits: \setupsorting instances: logos
$\backslash\text{placelistoflogos}$ [... <sup>*</sup> ... <sub>OPT</sub> ...] * inherits: \setupsorting
$\backslash\text{placelistofsynonyms}$ [ <sup>1</sup> ...] [... <sup>2</sup> ... <sub>OPT</sub> ...] 1 SINGULAR 2 inherits: \setupsynonyms
$\backslash\text{placelistofSYNONYMS}$ [... <sup>*</sup> ... <sub>OPT</sub> ...] * inherits: \setupsynonyms instances: abbreviations
$\backslash\text{placelistofabbreviations}$ [... <sup>*</sup> ... <sub>OPT</sub> ...] * inherits: \setupsynonyms
$\backslash\text{placelocalfootnotes}$ [... <sup>*</sup> ... <sub>OPT</sub> ...] * inherits: \setupnote

$\backslash\text{placelocalnotes}$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sub>OPT</sub> ...] 1 NAME 2 inherits: \setupnote
$\backslash\text{placement}$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sub>OPT</sub> ...] { <sup>3</sup> ...} 1 NAME 2 inherits: \setupplacement 3 CONTENT
$\backslash\text{PLACEMENT}$ [ <sup>1</sup> ... <sub>OPT</sub> ...] { <sup>2</sup> ...} 1 inherits: \setupplacement 2 CONTENT
$\backslash\text{placenamefloat}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...] 1 NAME 2 REFERENCE
$\backslash\text{placenameformula}$ [ <sup>1</sup> ... <sub>OPT</sub> ...] { <sup>2</sup> ...} { <sup>3</sup> ... <sub>OPT</sub> } 1 + - REFERENCE 2 TEXT 3 TEXT
$\backslash\text{placenotes}$ [ <sup>1</sup> ... <sub>OPT</sub> ...] [ <sup>2</sup> ... <sub>OPT</sub> ...] 1 NAME 2 inherits: \setupnote
$\backslash\text{placeongrid}$ [ <sup>1</sup> ...] { <sup>2</sup> ...} 1 normal standard <sub>OPT</sub> yes strict tolerant top bottom both broad fit first last high one low none line strut box min max middle math math:line math:halfline math:-line math:-halfline NAME 2 CONTENT
$\backslash\text{placeongrid}$ [ <sup>1</sup> ... <sub>OPT</sub> ...] { <sup>2</sup> ...} 1 inherits: \definegridsnapping 2 CONTENT
$\backslash\text{placeontopofeachother}$ { <sup>1</sup> ...} { <sup>2</sup> ...} 1 CONTENT 2 CONTENT
$\backslash\text{placepagenumber}$
$\backslash\text{placepairedbox}$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sub>OPT</sub> ...] { <sup>3</sup> ...} { <sup>4</sup> ...} 1 NAME 2 inherits: \setuppairedbox 3 CONTENT 4 TEXT
$\backslash\text{placePAIREDBOX}$ [ <sup>1</sup> ... <sub>OPT</sub> ...] { <sup>2</sup> ...} { <sup>3</sup> ...} 1 inherits: \setuppairedbox 2 CONTENT 3 TEXT instances: legend
$\backslash\text{placelegend}$ [ <sup>1</sup> ... <sub>OPT</sub> ...] { <sup>2</sup> ...} { <sup>3</sup> ...} 1 inherits: \setuppairedbox 2 CONTENT 3 TEXT
$\backslash\text{placeparallel}$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sub>OPT</sub> ...] [ <sup>3</sup> ... <sub>OPT</sub> ...] 1 NAME 2 NAME 3 inherits: \setupparallel

<p><b>\placerawlist</b> [<sup>1</sup>...] [<sup>2</sup>...<sub>OPT</sub>...]</p> <p>1 LIST</p> <p>2 inherits: \setuplist</p>
<p><b>\placeregister</b> [<sup>1</sup>...] [<sup>2</sup>...<sub>OPT</sub>...]</p> <p>1 NAME</p> <p>2 inherits: \setupregister</p>
<p><b>\placeREGISTER</b> [...<sub>OPT</sub>...]</p> <p>* inherits: \setupregister<sub>OPT</sub></p> <p>instances: index</p>
<p><b>\placeindex</b> [...<sub>OPT</sub>...]</p> <p>* inherits: \setupregister<sub>OPT</sub></p>
<p><b>\placereadingwindow</b> [<sup>1</sup>...] [<sup>2</sup>...<sub>OPT</sub>]</p> <p>1 NAME</p> <p>2 NAME</p>
<p><b>\placesidebyside</b> {...<sup>1</sup>} {...<sup>2</sup>}</p> <p>1 CONTENT</p> <p>2 CONTENT</p>
<p><b>\placesubformula</b> [...<sup>1</sup>...<sub>OPT</sub>] {...<sup>2</sup>...<sub>OPT</sub>}</p> <p>1 + - REFERENCE</p> <p>2 TEXT</p>
<p><b>\popattribute</b> \*...</p> <p>* CSNAME</p>
<p><b>\popmacro</b> \*...</p> <p>* CSNAME</p>
<p><b>\popmode</b> [...]</p> <p>* NAME</p>
<p><b>\popsystemmode</b> {...}</p> <p>* NAME</p>
<p><b>\position</b> [...<sub>OPT</sub>...<sup>1</sup>...] (...<sup>2</sup>,...) {...<sup>3</sup>}</p> <p>1 inherits: \setuppositioning<sub>OPT</sub></p> <p>2 POSITION</p> <p>3 CONTENT</p>
<p><b>\positionoverlay</b> {...}</p> <p>* NAME</p>
<p><b>\positionregionoverlay</b> {...<sup>1</sup>} {...<sup>2</sup>}</p> <p>1 NAME</p> <p>2 NAME</p>
<p><b>\postponenotes</b></p>
<p><b>\predefinedfont</b> [...]</p> <p>* FONT</p>
<p><b>\predefinefont</b> [<sup>1</sup>...] [<sup>2</sup>...]</p> <p>1 NAME</p> <p>2 FONT</p>

<pre> \predefinesymbol [...] *   NAME </pre>
<pre> \prefixedpagenumber </pre>
<pre> \prependetoks ... \to ... 1   COMMAND 2   CSNAME </pre>
<pre> \prependgvalue {...} {...} 1   NAME 2   COMMAND </pre>
<pre> \prependtocommalist {...} ... 1   TEXT 2   CSNAME </pre>
<pre> \prependtoks ... \to ... 1   COMMAND 2   CSNAME </pre>
<pre> \prependtoksonce ... \to ... 1   COMMAND 2   CSNAME </pre>
<pre> \prependvalue {...} {...} 1   NAME 2   COMMAND </pre>
<pre> \prerollblank [...,*...] *   inherits: \blank </pre>
<pre> \presetdocument [...,*...,...] *   inherits: \setupdocument </pre>
<pre> \presetfieldsymbols [...,*...] *   NAME </pre>
<pre> \presetLABELtext [...] [...] [...] 1   LANGUAGE          OPT 2   KEY = VALUE instances: head label mathlabel taglabel unit operator prefix suffix btxlabel </pre>
<pre> \presetbtxlabeltext [...] [...] [...] 1   LANGUAGE          OPT 2   KEY = VALUE </pre>
<pre> \presetheadtext [...] [...] [...] 1   LANGUAGE          OPT 2   KEY = VALUE </pre>
<pre> \presetlabeltext [...] [...] [...] 1   LANGUAGE          OPT 2   KEY = VALUE </pre>
<pre> \presetmathlabeltext [...] [...] [...] 1   LANGUAGE          OPT 2   KEY = VALUE </pre>

<pre> \presetoperatortext [...] [...<sup>2</sup>...] 1  LANGUAGE          OPT 2  KEY = VALUE </pre>
<pre> \presetprefixtext [...] [...<sup>2</sup>...] 1  LANGUAGE          OPT 2  KEY = VALUE </pre>
<pre> \presetsuffixtext [...] [...<sup>2</sup>...] 1  LANGUAGE          OPT 2  KEY = VALUE </pre>
<pre> \presettaglabeltext [...] [...<sup>2</sup>...] 1  LANGUAGE          OPT 2  KEY = VALUE </pre>
<pre> \presetunittext [...] [...<sup>2</sup>...] 1  LANGUAGE          OPT 2  KEY = VALUE </pre>
<pre> \pretocommalist {...} \<sup>2</sup>... 1  TEXT 2  CSNAME </pre>
<pre> \prettyprintbuffer {...} {<sup>2</sup>...} 1  BUFFER 2  mp lua xml parsed-xml nested tex context none NAME </pre>
<pre> \prevcounter [...] [<sup>2</sup>...] 1  NAME          OPT 2  NUMBER </pre>
<pre> \prevcountervalue [...] *  NAME </pre>
<pre> \preventmode [...,*...] *  NAME </pre>
<pre> \prevrealpage </pre>
<pre> \prevrealpagenumber </pre>
<pre> \prevsubcountervalue [<sup>1</sup>] [<sup>2</sup>] 1  NAME 2  NUMBER </pre>
<pre> \prevsubpage </pre>
<pre> \prevsubpagenumber </pre>
<pre> \prevuserpage </pre>
<pre> \prevuserpagenumber </pre>
<pre> \procent </pre>
<pre> \processaction [...] [...<sup>2</sup>=&gt;...] 1  COMMAND 2  APPLY </pre>

<code>\processallactionsinset [...]<sup>1</sup> [...,...=&gt;...,...]</code> 1    COMMAND 2    APPLY
<code>\processassignlist [...,...]<sup>1</sup> \...<sup>2</sup></code> 1    TEXT 2    CSNAME
<code>\processassignmentcommand [...,...<sup>1</sup>...,...] \...<sup>2</sup></code> 1    KEY = VALUE 2    CSNAME
<code>\processassignmentlist [...,...<sup>1</sup>...,...] \...<sup>2</sup></code> 1    KEY = VALUE 2    CSNAME
<code>\processbetween {...}<sup>1</sup> \...<sup>2</sup></code> 1    NAME 2    CSNAME
<code>\processblocks [...,...]<sup>1</sup> [...,...]<sup>2</sup> [...,...<sup>3</sup>...,...]</code> 1    NAME 2    NAME 3    criterium = <u>text</u> SECTION <div> <div>OPT</div> <div>OPT</div> </div>
<code>\processbodyfontenvironmentlist \...</code> *    CSNAME
<code>\processcolorcomponents {...}<sup>*</sup></code> *    COLOR
<code>\processcommaccommand [...,...]<sup>1</sup> \...<sup>2</sup></code> 1    COMMAND 2    CSNAME
<code>\processcommalist [...,...]<sup>1</sup> \...<sup>2</sup></code> 1    COMMAND 2    CSNAME
<code>\processcommalistwithparameters [...,...]<sup>1</sup> \...<sup>2</sup></code> 1    COMMAND 2    CSNAME
<code>\processcontent {...}<sup>1</sup> \...<sup>2</sup></code> 1    NAME 2    CSNAME
<code>\processfile {...}<sup>*</sup></code> *    FILE
<code>\processfilemany {...}<sup>*</sup></code> *    FILE
<code>\processfilenone {...}<sup>*</sup></code> *    FILE
<code>\processfileonce {...}<sup>*</sup></code> *    FILE

<pre> \processfirstactioninset [...] [...] [...] 1  COMMAND 2  APPLY </pre>
<pre> \processisolatedchars {...} \^2.. 1  TEXT 2  CSNAME </pre>
<pre> \processisolatedwords {...} \^2.. 1  TEXT 2  CSNAME </pre>
<pre> \processlinetablebuffer [...] *  BUFFER                      OPT </pre>
<pre> \processlinetablefile {...} *  FILE </pre>
<pre> \processlist {...} {...} {...} \^4.. 1  CHARACTER 2  CHARACTER 3  TEXT 4  CSNAME </pre>
<pre> \processMPbuffer [...] *  NAME                      OPT </pre>
<pre> \processMPfigurefile {...} *  FILE </pre>
<pre> \processmonth {...} {...} {...} 1  NUMBER 2  NUMBER 3  COMMAND </pre>
<pre> \processranges [...] \^2.. 1  NUMBER NUMBER:NUMBER 2  CSNAME </pre>
<pre> \processseparatedlist [...] [...] {...} 1  TEXT 2  TEXT 3  CSNAME COMMAND </pre>
<pre> \processTEXbuffer [...] *  BUFFER                      OPT </pre>
<pre> \processtokens {...} {...} {...} {...} {...} 1  COMMAND 2  COMMAND 3  COMMAND 4  COMMAND 5  TEXT </pre>
<pre> \processuntil \^*.. *  CSNAME </pre>
<pre> \processxtablebuffer [...] *  NAME                      OPT </pre>



<p><code>\processyear {...} {...} {...} {...}</code></p> <p>1 NUMBER</p> <p>2 COMMAND</p> <p>3 COMMAND</p> <p>4 COMMAND</p>
<p><code>\product [...]</code></p> <p>* FILE</p>
<p><code>\product ...</code></p> <p>* FILE</p>
<p><code>\profiledbox [...]<sup>1</sup> [...,...<sup>2</sup>...,...]<sup>2</sup> {...}<sup>3</sup></code></p> <p>1 none fixed strict halffixed quarterfixed eightsfixed NAME</p> <p>2 inherits: \setupprofile</p> <p>3 CONTENT</p>
<p><code>\profilegivenbox {...}<sup>1</sup> ...<sup>2</sup></code></p> <p>1 none fixed strict halffixed quarterfixed eightsfixed NAME</p> <p>2 CSNAME NUMBER</p>
<p><code>\program [...]</code></p> <p>* NAME</p>
<p><code>\project [...]</code></p> <p>* FILE</p>
<p><code>\project ...</code></p> <p>* FILE</p>
<p><code>\pseudoMixedCapped {...}</code></p> <p>* TEXT</p>
<p><code>\pseudoSmallCapped {...}</code></p> <p>* TEXT</p>
<p><code>\pseudoSmallcapped {...}</code></p> <p>* TEXT</p>
<p><code>\pseudosmallcapped {...}</code></p> <p>* TEXT</p>
<p><code>\purenumber {...}</code></p> <p>* NUMBER</p>
<p><code>\pusharrangedpages ... \poparrangedpages</code></p>
<p><code>\pushattribute \...</code></p> <p>* CSNAME</p>
<p><code>\pushbackground [...]<sup>1</sup> ... \popbackground</code></p> <p>* NAME</p>
<p><code>\pushbar [...]<sup>1</sup> ... \popbar</code></p> <p>* NAME</p>
<p><code>\pushbutton [...]<sup>1</sup> [...]<sup>2</sup></code></p> <p>1 NAME</p> <p>2 REFERENCE</p>

<code>\pushcatcodetable ... \popcatcodetable</code>
<code>\pushcolor [...] ... \popcolor</code> <code>* COLOR</code>
<code>\pushendofline ... \popendofline</code>
<code>\pushindentation ... \popindentation</code>
<code>\pushMPdrawing ... \popMPdrawing</code>
<code>\pushmacro \...</code> <code>* CSNAME</code>
<code>\pushmathstyle ... \popmathstyle</code>
<code>\pushmode [...]</code> <code>* NAME</code>
<code>\pushoutputstream [...]</code> <code>* NAME</code> <code>OPT</code>
<code>\pushpath [...] ... \poppath</code> <code>* PATH</code>
<code>\pushpunctuation ... \poppunctuation</code>
<code>\pushrandomseed ... \poprandomseed</code>
<code>\pushreferenceprefix {...} ... \popreferenceprefix</code> <code>* + - TEXT</code>
<code>\pushsystemmode {...}</code> <code>* NAME</code>
<code>\putboxincache {...} {...} ...</code> <code>1 NAME</code> <code>2 NUMBER TEXT</code> <code>3 CSNAME NUMBER</code>
<code>\putnextboxincache {...} {...} \... {...}</code> <code>1 NAME</code> <code>2 NUMBER TEXT</code> <code>3 CSNAME</code> <code>4 CONTENT</code>
<code>\qqquad</code>
<code>\quad</code>
<code>\quads [...]</code> <code>* NUMBER OPT</code>
<code>\quarterstrut</code>
<code>\quitcommalist</code>



**\rawgetparameters** [<sup>1</sup>...] [<sup>2</sup>...]

- 1 TEXT
- 2 KEY = VALUE

**\rawprocessaction** [<sup>1</sup>...] [<sup>2</sup>...]

- 1 COMMAND
- 2 APPLY

**\rawprocesscommacommmand** [...,<sup>1</sup>...] \<sup>2</sup>...

- 1 COMMAND
- 2 CSNAME

**\rawprocesscommalist** [...,<sup>1</sup>...] \<sup>2</sup>...

- 1 COMMAND
- 2 CSNAME

**\rawstructurelistuservariable** {...}

- \* KEY

**\rawsubcountervalue** [<sup>1</sup>] [<sup>2</sup>]

- 1 NAME
- 2 NUMBER

**\rbox** <sup>1</sup>... {<sup>2</sup>...}

- 1 TEXT <sup>OPT</sup>
- 2 CONTENT

**\readfile** {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}

- 1 FILE
- 2 TRUE
- 3 FALSE

**\readfixfile** {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...}

- 1 PATH
- 2 FILE
- 3 TRUE
- 4 FALSE

**\readjobfile** {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}

- 1 FILE
- 2 TRUE
- 3 FALSE

**\readlocfile** {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}

- 1 FILE
- 2 TRUE
- 3 FALSE

**\readsetfile** {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...}

- 1 PATH
- 2 FILE
- 3 TRUE
- 4 FALSE

**\readsysfile** {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}

- 1 FILE
- 2 TRUE
- 3 FALSE

**\readtexfile** {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}

- 1 FILE
- 2 TRUE
- 3 FALSE

<code>\readxmlfile {...} {...} {...}</code> 1 FILE 2 TRUE 3 FALSE
<code>\realpagenumber</code>
<code>\realSmallCapped {...}</code> * TEXT
<code>\realSmallcapped {...}</code> * TEXT
<code>\realsmallcapped {...}</code> * TEXT
<code>\recursedepth</code>
<code>\recurselevel</code>
<code>\recursestring</code>
<code>\redoconvertfont</code>
<code>\ref [...<sup>1</sup>] [...<sup>2</sup>]</code> 1 default text title number page realpage 2 REFERENCE
<code>\reference [...<sup>1</sup>,...] {...<sup>2</sup>}</code> 1 REFERENCE 2 TEXT
<code>\REFERENCEFORMAT {...<sup>1</sup>} {...<sup>2</sup>} [...<sup>3</sup>]</code> 1 TEXT OPT OPT 2 TEXT 3 REFERENCE
<code>\referenceprefix</code>
<code>\referring (...<sup>1</sup>,...) (...<sup>2</sup>,...) [...<sup>3</sup>]</code> 1 POSITION 2 POSITION 3 REFERENCE
<code>\registerattachment [...<sup>1</sup>] [...<sup>2</sup>,...<sup>2</sup>,...]</code> 1 NAME 2 inherits: \setupattachment
<code>\registerctxluafile {...<sup>1</sup>} {...<sup>2</sup>}</code> 1 FILE 2 NUMBER
<code>\registerexternalfigure [...<sup>1</sup>] [...<sup>2</sup>] [...<sup>3</sup>,...<sup>3</sup>,...]</code> 1 FILE OPT OPT 2 NAME 3 inherits: \setupexternalfigure
<code>\registerfontclass {...<sup>*</sup>}</code> * NAME

\registerhyphenationexception [...] [...] 1 LANGUAGE OPT 2 TEXT
\registerhyphenationpattern [...] [...] 1 LANGUAGE OPT 2 TEXT
\registermenubuttons [...] [...] 1 NAME 2 TEXT
\registersort [...] [...] 1 SINGULAR 2 NAME
\registersynonym [...] [...] 1 SINGULAR 2 NAME
\registerunit [...] [...,... <sup>2</sup> ...,...] 1 prefix <u>unit</u> operator <sup>OPT</sup> suffixe symbol packaged 2 KEY = VALUE
\REGISTER [...] {...+... <sup>2</sup> +...} 1 TEXT PROCESSOR <sup>OPT</sup> ->TEXT 2 INDEX instances: index
\index [...] {...+... <sup>2</sup> +...} 1 TEXT PROCESSOR <sup>OPT</sup> ->TEXT 2 INDEX
\REGISTER [...] {... <sup>2</sup> } {...+... <sup>3</sup> +...} 1 TEXT PROCESSOR <sup>OPT</sup> ->TEXT 2 TEXT 3 INDEX instances: index
\index [...] {... <sup>2</sup> } {...+... <sup>3</sup> +...} 1 TEXT PROCESSOR <sup>OPT</sup> ->TEXT 2 TEXT 3 INDEX
\regular
\relatemarking [...] [...] 1 MARK 2 MARK
\relateparameterhandlers {... <sup>1</sup> } {... <sup>2</sup> } {... <sup>3</sup> } {... <sup>4</sup> } 1 NAME 2 NAME 3 NAME 4 NAME
\relaxvalueifundefined {...} * NAME
\remainingcharacters

<pre> \remark (...<sup>1</sup>,...) (...<sup>2</sup>,...) [...<sup>3</sup><sub>OPT</sub>,...] {...<sup>4</sup>} 1  POSITION 2  POSITION 3  inherits: \setupframed 4  TEXT </pre>
<pre> \removebottomthings </pre>
<pre> \removedepth </pre>
<pre> \removefromcommalist {...<sup>1</sup>} \..<sup>2</sup> 1  TEXT 2  CSNAME </pre>
<pre> \removelastskip </pre>
<pre> \removelastspace </pre>
<pre> \removemarkedcontent [...<sup>*</sup>] *  NAME </pre>
<pre> \removepunctuation </pre>
<pre> \removesubstring ...<sup>1</sup> \from ...<sup>2</sup> \to \..<sup>3</sup> 1  TEXT 2  TEXT 3  CSNAME </pre>
<pre> \removetoks ...<sup>1</sup> \from \..<sup>2</sup> 1  COMMAND 2  CSNAME </pre>
<pre> \removeunwantedspaces </pre>
<pre> \replacefeature [...<sup>*</sup>] *  NAME </pre>
<pre> \replacefeature {...<sup>*</sup>} *  NAME </pre>
<pre> \replaceincommalist \..<sup>1</sup> {...<sup>2</sup>} 1  CSNAME 2  NUMBER </pre>
<pre> \replaceword [...<sup>1</sup>] [...<sup>2</sup>] [...<sup>3</sup>] 1  NAME 2  TEXT 3  TEXT </pre>
<pre> \rescan {...<sup>*</sup>} *  CONTENT </pre>
<pre> \rescanwithsetup {...<sup>1</sup>} {...<sup>2</sup>} 1  NAME 2  CONTENT </pre>
<pre> \resetallattributes </pre>

<pre>\resetandaddfeature [...] * NAME</pre>
<pre>\resetandaddfeature {...} * NAME</pre>
<pre>\resetbar</pre>
<pre>\resetboxesincache {...} * NAME</pre>
<pre>\resetbreakpoints</pre>
<pre>\resetbuffer [...] * BUFFER</pre>
<pre>\resetcharacteralign</pre>
<pre>\resetcharacterkerning</pre>
<pre>\resetcharacterspacing</pre>
<pre>\resetcharacterstripping</pre>
<pre>\resetcollector [...] * NAME</pre>
<pre>\resetcounter [...]<sup>1</sup> [...]<sup>2</sup> 1 NAME OPT 2 NUMBER</pre>
<pre>\resetdigitsmanipulation</pre>
<pre>\resetdirection</pre>
<pre>\resetfeature</pre>
<pre>\resetflag {...} * NAME</pre>
<pre>\resetfontcolorscheme</pre>
<pre>\resetfontfallback [...]<sup>1</sup> [...]<sup>2</sup> 1 NAME OPT 2 FONT</pre>
<pre>\resetfontsolution</pre>
<pre>\resethyphenationfeatures</pre>
<pre>\resetinjector [...] * NAME</pre>
<pre>\resetinteractionmenu [...] * NAME</pre>





<code>\resetsymbolset</code>
<code>\resetsystemmode {...}</code> *    NAME
<code>\resettimer</code>
<code>\resettrackers</code>
<code>\resettrialtypesetting</code>
<code>\resetusedsortings [...]</code> *    SINGULAR
<code>\resetusedsynonyms [...]</code> *    SINGULAR
<code>\resetuserpagenumber</code>
<code>\resetvalue {...}</code> *    NAME
<code>\resetvisualizers</code>
<code>\reshapebox {...}</code> *    COMMAND
<code>\resolvedglyphdirect {...} {...}</code> 1    FONT 2    e:NAME x:NUMBER d:NUMBER s:NUMBER i:NUMBER n:NAME c:NAME u:NAME a:NAME
<code>\resolvedglyphstyled {...} {...}</code> 1    FONT 2    e:NAME x:NUMBER d:NUMBER s:NUMBER i:NUMBER n:NAME c:NAME u:NAME a:NAME
<code>\restartcounter [...] [...<sup>1</sup>] [...<sup>2</sup>] [...<sup>3</sup>]</code> 1    NAME 2    NUMBER 3    NUMBER
<code>\restorebox {...} {...}</code> 1    NAME 2    NAME
<code>\restorecatcodes</code>
<code>\restorecounter [...]</code> *    NAME
<code>\restorecurrentattributes {...}</code> *    NAME
<code>\restoreendofline</code>
<code>\restoreglobalbodyfont</code>

$\backslash$ reusableMPgraphic {...} {..., <sup>2</sup> ...,...} 1 NAME OPT 2 KEY = VALUE
$\backslash$ reuseMPgraphic {...} {..., <sup>2</sup> ...,...} 1 NAME OPT 2 KEY = VALUE
$\backslash$ reuserandomseed
$\backslash$ revivefeature
$\backslash$ rfence {...} * CHARACTER
$\backslash$ rhbox {...} * CONTENT
$\backslash$ right .. * CHARACTER
$\backslash$ rightaligned {...} * CONTENT
$\backslash$ rightbottombox {...} * CONTENT
$\backslash$ rightbox {...} * CONTENT
$\backslash$ right hbox {...} * CONTENT
$\backslash$ right LABELtext {...} * KEY instances: head label mathlabel
$\backslash$ right headtext {...} * KEY
$\backslash$ right labeltext {...} * KEY
$\backslash$ right mathlabeltext {...} * KEY
$\backslash$ rightline {...} * CONTENT
$\backslash$ rightorleftpageaction {...} {...} 1 COMMAND 2 COMMAND
$\backslash$ rightpageorder
$\backslash$ rightskipadaption

<code>\rightsubguillemot</code>
<code>\righttopleft</code>
<code>\righttolefthbox</code> $\overset{1}{...} \{ \overset{2}{...} \}$ 1 TEXT OPT 2 CONTENT
<code>\righttopleftvbox</code> $\overset{1}{...} \{ \overset{2}{...} \}$ 1 TEXT OPT 2 CONTENT
<code>\righttopleftvtop</code> $\overset{1}{...} \{ \overset{2}{...} \}$ 1 TEXT OPT 2 CONTENT
<code>\righttopbox</code> $\{ \overset{*}{...} \}$ * CONTENT
<code>\ring</code> $\{ \overset{*}{...} \}$ * CHARACTER
<code>\rlap</code> $\{ \overset{*}{...} \}$ * CONTENT
<code>\robustaddtocommalist</code> $\{ \overset{1}{...} \} \backslash \overset{2}{...}$ 1 TEXT 2 CSNAME
<code>\robustdoifelseinset</code> $\{ \overset{1}{...} \} \{ \overset{2}{...}, \overset{2}{...} \} \{ \overset{3}{...} \} \{ \overset{4}{...} \}$ 1 TEXT 2 TEXT 3 TRUE 4 FALSE
<code>\robustdoifinsetelse</code> $\{ \overset{1}{...} \} \{ \overset{2}{...}, \overset{2}{...} \} \{ \overset{3}{...} \} \{ \overset{4}{...} \}$ 1 TEXT 2 TEXT 3 TRUE 4 FALSE
<code>\robustpretocommalist</code> $\{ \overset{1}{...} \} \backslash \overset{2}{...}$ 1 TEXT 2 CSNAME
<code>\rollbutton</code> $[ \overset{1}{...}, \overset{1}{...}, \overset{1}{...} ] \overset{2}{...} [ \overset{3}{...} ]$ 1 inherits: \setupbutton 2 TEXT 3 REFERENCE
<code>\rollbutton</code> $[ \overset{1}{...} ] [ \overset{2}{...}, \overset{2}{...}, \overset{2}{...} ] \overset{3}{...} [ \overset{4}{...} ]$ 1 NAME OPT OPT 2 inherits: \setupinteractionmenu 3 TEXT 4 REFERENCE
<code>\roman</code>
<code>\romannumerals</code> $\{ \overset{*}{...} \}$ * NUMBER

```
\rotate [...,\stackrel{1}{=},...] {\dots}
1 inherits: \setuprotate
2 CONTENT
```

```
\rtop ... {\dots}
1 TEXT OPT
2 CONTENT
```

```
\ruby [...]\stackrel{1}{...} {\dots} {\dots}
1 NAME OPT
2 TEXT
3 TEXT
```

```
\ruledhbox ... {\dots}
1 TEXT OPT
2 CONTENT
```

```
\ruledhpack ... {\dots}
1 TEXT OPT
2 CONTENT
```

```
\ruledmbox {\dots}
* CONTENT
```

```
\ruledtopv ... {\dots}
1 TEXT OPT
2 CONTENT
```

```
\ruledtpack ... {\dots}
1 TEXT OPT
2 CONTENT
```

```
\ruledvbox ... {\dots}
1 TEXT OPT
2 CONTENT
```

```
\ruledvpack ... {\dots}
1 TEXT OPT
2 CONTENT
```

```
\ruledvtop ... {\dots}
1 TEXT OPT
2 CONTENT
```

```
\runMPbuffer [...]\stackrel{*}{...}
* NAME OPT
```

```
\runninghbox {\dots}
* CONTENT
```

```
\ScaledPointsToBigPoints {\dots} \dots
1 DIMENSION
2 CSNAME
```

```
\ScaledPointsToWholeBigPoints {\dots} \dots
1 DIMENSION
2 CSNAME
```

```
\SmallCapped {\dots}
* TEXT
```

\* TEXT

\* NUMBER

\* FILE

\sansbold

\sansserif

```
1  NAME
2  NAME
3  CONTENT
```

[illegible]

```
*  list      = NAME
   file      = FILE
   prefix    = yes no
```

```
1  BUFFER
2  FILE
```

\* NAME

\* NAME

\* CSNAME

1	NAME
2	NUMBER
3	NAME
4	CONTENT

1	NAME
2	NUMBER
3	CONTENT

<code>\sbox {...}</code> *    CONTENT
<code>\scale [<sup>1</sup>...] [<sup>2</sup>...,...<sup>2</sup>...,...] {<sup>3</sup>...}</code> 1    NAME        OPT                    OPT 2    inherits: \setupscale 3    CONTENT
<code>\screen [...,*,...]</code> *    inherits: \ <sup>OPT</sup> page
<code>\SCRIPT</code> instances: hangul hanzi nihongo ethiopic thai latin test
<code>\ethiopic</code>
<code>\hangul</code>
<code>\hanzi</code>
<code>\latin</code>
<code>\nihongo</code>
<code>\test</code>
<code>\thai</code>
<code>\secondoffivearguments {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...} {<sup>5</sup>...}</code> 1    TEXT 2    TEXT 3    TEXT 4    TEXT 5    TEXT
<code>\secondoffourarguments {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...}</code> 1    TEXT 2    TEXT 3    TEXT 4    TEXT
<code>\secondofsixarguments {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...} {<sup>4</sup>...} {<sup>5</sup>...} {<sup>6</sup>...}</code> 1    TEXT 2    TEXT 3    TEXT 4    TEXT 5    TEXT 6    TEXT
<code>\secondofthreearguments {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}</code> 1    TEXT 2    TEXT 3    TEXT
<code>\secondofthreeunexpanded {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}</code> 1    TEXT 2    TEXT 3    TEXT

`\secondoftwoarguments {...} {...}`

1 TEXT  
2 TEXT

`\secondoftwounexpanded {...} {...}`

1 TEXT  
2 TEXT

`\SECTION [...,1...] {...}`

1 REFERENCE OPT  
2 TEXT

instances: part chapter section subsection subsubsection subsubsubsection subsubsubsubsection  
title subject subsubject subsubsubject subsubsubsubject subsubsubsubsubject

`\SECTION [...,..*...,...]`

\* title = TEXT  
bookmark = TEXT  
marking = TEXT  
list = TEXT  
reference = REFERENCE  
ownnumber = TEXT

instances: part chapter section subsection subsubsection subsubsubsection subsubsubsubsection  
title subject subsubject subsubsubject subsubsubsubject subsubsubsubsubject

`\chapter [...,..*...,...]`

\* title = TEXT  
bookmark = TEXT  
marking = TEXT  
list = TEXT  
reference = REFERENCE  
ownnumber = TEXT

`\part [...,..*...,...]`

\* title = TEXT  
bookmark = TEXT  
marking = TEXT  
list = TEXT  
reference = REFERENCE  
ownnumber = TEXT

`\section [...,..*...,...]`

\* title = TEXT  
bookmark = TEXT  
marking = TEXT  
list = TEXT  
reference = REFERENCE  
ownnumber = TEXT

`\subject [...,..*...,...]`

\* title = TEXT  
bookmark = TEXT  
marking = TEXT  
list = TEXT  
reference = REFERENCE  
ownnumber = TEXT

`\subsection [...,..*...,...]`

\* title = TEXT  
bookmark = TEXT  
marking = TEXT  
list = TEXT  
reference = REFERENCE  
ownnumber = TEXT



`\subsubject [...,.*=...]`

```
* title      = TEXT
bookmark    = TEXT
marking     = TEXT
list        = TEXT
reference   = REFERENCE
ownnumber   = TEXT
```

`\subsubsection [...,.*=...]`

```
* title      = TEXT
bookmark    = TEXT
marking     = TEXT
list        = TEXT
reference   = REFERENCE
ownnumber   = TEXT
```

`\subsubsubject [...,.*=...]`

```
* title      = TEXT
bookmark    = TEXT
marking     = TEXT
list        = TEXT
reference   = REFERENCE
ownnumber   = TEXT
```

`\subsubsubsection [...,.*=...]`

```
* title      = TEXT
bookmark    = TEXT
marking     = TEXT
list        = TEXT
reference   = REFERENCE
ownnumber   = TEXT
```

`\subsubsubsubject [...,.*=...]`

```
* title      = TEXT
bookmark    = TEXT
marking     = TEXT
list        = TEXT
reference   = REFERENCE
ownnumber   = TEXT
```

`\subsubsubsubsection [...,.*=...]`

```
* title      = TEXT
bookmark    = TEXT
marking     = TEXT
list        = TEXT
reference   = REFERENCE
ownnumber   = TEXT
```

`\subsubsubsubsubject [...,.*=...]`

```
* title      = TEXT
bookmark    = TEXT
marking     = TEXT
list        = TEXT
reference   = REFERENCE
ownnumber   = TEXT
```

`\title [...,.*=...]`

```
* title      = TEXT
bookmark    = TEXT
marking     = TEXT
list        = TEXT
reference   = REFERENCE
ownnumber   = TEXT
```

`\chapter [...,1...] {2...}`

```
1 REFERENCE OPT
2 TEXT
```

`\SECTION [...,1...] {...} {...3}`

1 REFERENCE <sup>OPT</sup>  
2 NUMBER  
3 TEXT

instances: part chapter section subsection subsubsection subsubsubsection subsubsubsubsection  
title subject subsubject subsubsubject subsubsubsubject subsubsubsubsubject

`\chapter [...,1...] {...} {...3}`

1 REFERENCE <sup>OPT</sup>  
2 NUMBER  
3 TEXT

`\part [...,1...] {...} {...3}`

1 REFERENCE<sup>PT</sup>  
2 NUMBER  
3 TEXT

`\section [...,1...] {...} {...3}`

1 REFERENCE <sup>OPT</sup>  
2 NUMBER  
3 TEXT

`\subject [...,1...] {...} {...3}`

1 REFERENCE <sup>OPT</sup>  
2 NUMBER  
3 TEXT

`\subsection [...,1...] {...} {...3}`

1 REFERENCE <sup>OPT</sup>  
2 NUMBER  
3 TEXT

`\subsubject [...,1...] {...} {...3}`

1 REFERENCE <sup>OPT</sup>  
2 NUMBER  
3 TEXT

`\subsubsection [...,1...] {...} {...3}`

1 REFERENCE <sup>OPT</sup>  
2 NUMBER  
3 TEXT

`\subsubsubject [...,1...] {...} {...3}`

1 REFERENCE <sup>OPT</sup>  
2 NUMBER  
3 TEXT

`\subsubsubsection [...,1...] {...} {...3}`

1 REFERENCE <sup>OPT</sup>  
2 NUMBER  
3 TEXT

`\subsubsubsubject [...,1...] {...} {...3}`

1 REFERENCE <sup>OPT</sup>  
2 NUMBER  
3 TEXT

`\subsubsubsubsection [...,1...] {...} {...3}`

1 REFERENCE <sup>OPT</sup>  
2 NUMBER  
3 TEXT

<p><code>\subsubsubsubsubject [...,<sup>1</sup>...] {...} {...}</code></p> <p>1    REFERENCE                    OPT</p> <p>2    NUMBER</p> <p>3    TEXT</p>
<p><code>\title [...,<sup>1</sup>...] {...} {...}</code></p> <p>1    REFERENCE    OPT</p> <p>2    NUMBER</p> <p>3    TEXT</p>
<p><code>\part [...,<sup>1</sup>...] {...}</code></p> <p>1    REFERENCE<sup>PT</sup></p> <p>2    TEXT</p>
<p><code>\section [...,<sup>1</sup>...] {...}</code></p> <p>1    REFERENCE            OPT</p> <p>2    TEXT</p>
<p><code>\subject [...,<sup>1</sup>...] {...}</code></p> <p>1    REFERENCE            OPT</p> <p>2    TEXT</p>
<p><code>\subsection [...,<sup>1</sup>...] {...}</code></p> <p>1    REFERENCE            OPT</p> <p>2    TEXT</p>
<p><code>\subsubject [...,<sup>1</sup>...] {...}</code></p> <p>1    REFERENCE            OPT</p> <p>2    TEXT</p>
<p><code>\subsubsection [...,<sup>1</sup>...] {...}</code></p> <p>1    REFERENCE            OPT</p> <p>2    TEXT</p>
<p><code>\subsubsubject [...,<sup>1</sup>...] {...}</code></p> <p>1    REFERENCE            OPT</p> <p>2    TEXT</p>
<p><code>\subsubsubsection [...,<sup>1</sup>...] {...}</code></p> <p>1    REFERENCE            OPT</p> <p>2    TEXT</p>
<p><code>\subsubsubsubject [...,<sup>1</sup>...] {...}</code></p> <p>1    REFERENCE            OPT</p> <p>2    TEXT</p>
<p><code>\subsubsubsubsection [...,<sup>1</sup>...] {...}</code></p> <p>1    REFERENCE            OPT</p> <p>2    TEXT</p>
<p><code>\subsubsubsubsubject [...,<sup>1</sup>...] {...}</code></p> <p>1    REFERENCE            OPT</p> <p>2    TEXT</p>
<p><code>\subsubsubsubsubsection [...,<sup>1</sup>...] {...}</code></p> <p>1    REFERENCE            OPT</p> <p>2    TEXT</p>
<p><code>\subsubsubsubsubsubject [...,<sup>1</sup>...] {...}</code></p> <p>1    REFERENCE            OPT</p> <p>2    TEXT</p>
<p><code>\title [...,<sup>1</sup>...] {...}</code></p> <p>1    REFERENCE    OPT</p> <p>2    TEXT</p>

```
\seeREGISTER [...]1 {...+...+...}2 {...}3
1 TEXT PROCESSOR->TEXT
2 INDEX
3 TEXT PROCESSOR->TEXT
instances: index
```

```
\seeindex [...]1 {...+...+...}2 {...}3
1 TEXT PROCESSOR->TEXT
2 INDEX
3 TEXT PROCESSOR->TEXT
```

```
\select {...}1 {...}2 {...}3 {...}4 {...}5 {...}6
1 NAME OPT OPT OPT OPT OPT
2 CONTENT
3 CONTENT
4 CONTENT
5 CONTENT
6 CONTENT
```

```
\selectblocks [...]1,... [...]2,... [...]3,...
1 NAME OPT OPT
2 NAME
3 criterium = text SECTION
```

```
\serializecommalist [...]*,...]
* COMMAND
```

```
\serializedcommalist
```

```
\serif
```

```
\serifbold
```

```
\serifnormal
```

```
\setautopagestaterealpageno {...}
* NAME
```

```
\setbar [...]*
* NAME
```

```
\setbigbodyfont
```

```
\setboxllx ...1 {...}2
1 CSNAME NUMBER
2 DIMENSION
```

```
\setboxlly ...1 {...}2
1 CSNAME NUMBER
2 DIMENSION
```

```
\setbreakpoints [...]*
* reset NAME
```

```
\setbuffer [...]* ... \endbuffer
* NAME
```

```
\setcapstrut
```

```
\setcatcodetable \.*
```

\* CSNAME

$$\backslash\mathrm{setcharacteralign}\{\ldots\}^1\{\ldots\}^2$$

1 NUMBER

2 TEXT number->TEXT text->TEXT

```
\setcharacteraligndetail {...} {...} {...} {...}
```

1 NUMBER

2 TEXT number->TEXT text->TEXT

### 3 DIMENSION

## 4 DIMENSION

```
\setcharactercasing [...]
```

```
*  reset WORD word Word Words capital Capital none random mixed camel cap Cap
```

```
\setcharactercleaning [...]
```

```
* reset 1
```

`\setcharacterkerning [...]`

```
* reset NAME
```

`\setcharacterspacing [...]`

```
*  reset NAME
```

`\setcharacterstripping [...]`

```
* reset 1
```

`\setcharstrut {...}`

\* TEXT

$$\backslash\mathrm{setcollector} \left[ \overset{1}{\dots} \right] \left[ \dots, \overset{2}{\dots} \dots, \dots \right] \{ \overset{3}{\dots} \}$$

1 NAME

```
2 inherits: \setupcollector
```

### 3 CONTENT

```
\setcolormodel [..]
```

```
*  black bw gray rgb cmyk all none
```

```
\setcounter [...] [...] [...]
```

1 NAME

1	NAME
2	NUMBER

3 NUMBER

```
\setcounterown [...] [.^2.] [...]
```

1 NAME

1	NAME
2	NUMBER

3 TEXT

```
\setcurrentfontclass {...}
```

\* NAME

```
\setdataset [...] [...] [...,...3...]
```

1 NAME

1	NAME
2	NAME

```

3  KEY  =  VALUE

```

\setdefaultpenalties

<pre> \setdigitsmanipulation [...] *   reset NUMBER </pre>
<pre> \setdirection [...] *   NUMBER </pre>
<pre> \setdocumentargument {...} {...} 1   NAME 2   TEXT </pre>
<pre> \setdocumentargumentdefault {...} {...} 1   NAME 2   TEXT </pre>
<pre> \setdocumentfilename {...} {...} 1   NUMBER 2   TEXT </pre>
<pre> \setdummyparameter {...} {...} 1   KEY 2   COMMAND </pre>
<pre> \setelementexporttag [...] [...] [...] 1   NAME                                OPT 2   export nature pdf 3   inline display mixed </pre>
<pre> \setemeasure {...} {...} 1   NAME 2   DIMENSION </pre>
<pre> \setevalue {...} {...} 1   NAME 2   CONTENT </pre>
<pre> \setevariable {...} {...} {...} 1   NAME 2   KEY 3   VALUE </pre>
<pre> \setevariables [...] [...] [...] 1   NAME 2   set    = COMMAND    reset  = COMMAND    KEY    = VALUE </pre>
<pre> \setfirstline [...] *   NAME                                OPT </pre>
<pre> \setfirstpasscharacteralign </pre>
<pre> \setflag {...} *   NAME </pre>
<pre> \setfont ... *   FONT </pre>
<pre> \setfontcolorscheme [...] *   NAME </pre>

\* NAME

\* NAME

\setfontstrut

```
* hangul hanzi nihongo ethiopic thai test NAME
```

1	NAME
2	DIMENSION

```

1  NAME
2  CONTENT

```

```
1  NAME
2  KEY
3  VALUE
```

```

1  NAME
2  set      =  COMMAND
   reset    =  COMMAND
   KEY      =  VALUE

```

```

1  CSNAME NUMBER
2  CONTENT

```

\* TEXT

\* TEXT

\* TEXT

```
* NAME reset OPT
```

```
1  NAME          OPT          OPT
2  inherits: \setupinitial
```

1	NAME
2	NUMBER
3	COMMAND

```
* hidden NAME
```

1	NAME
2	NAME

```

1  NAME
2  NAME

```

```

1  NAME
2  NAME

```

```
1  NAME
2  title NAME NUMBER
3  TEXT
```

1	NAME
2	NAME

```

1  NAME
2  auto embed
3  CONTENT

```

```
* reset 1 2
```

1	NAME
2	CONTENT

```

1  NAME                                OPT
2  left right even odd
3  inherits: \setupplayer
4  CONTENT

```

```

1  NAME
2  inherits: \setupplayer
3  inherits: \setupframed
4  CONTENT

```

1	NAME	OPT
2	inherits: \setupplayerinherits: \setupframed	
3	CONTENT	

```

1  NAME
2  inherits: \setupplayer
3  align = inherits: \setupalign
    width = DIMENSION
    style = STYLE COMMAND
    color = COLOR
4  TEXT

```

```
*  filler NAME
```

\* [-+] DIMENSION OPT



$\backslash\text{setlocalscript}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...] *    hangul hanzi nihongo ethiopic thai test NAME
$\backslash\text{setMPplayer}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...] [ <sup>3</sup> ...,... <sup>3</sup> ...,...] <sup>4</sup> { <sup>4</sup> ...} 1    NAME 2    NAME 3    inherits: \setupplayer 4    CONTENT
$\backslash\text{setMPpositiongraphic}$ { <sup>1</sup> ...} { <sup>2</sup> ...} { <sup>3</sup> ...,... <sup>3</sup> ...,...} 1    NAME 2    NAME 3    KEY = VALUE
$\backslash\text{setMPpositiongraphicrange}$ { <sup>1</sup> ...} { <sup>2</sup> ...} { <sup>3</sup> ...} { <sup>4</sup> ...,... <sup>4</sup> ...,...} 1    NAME 2    NAME 3    NAME 4    KEY = VALUE
$\backslash\text{setMPtext}$ { <sup>1</sup> ...} { <sup>2</sup> ...} 1    NAME 2    TEXT
$\backslash\text{setMPvariable}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...] 1    NAME 2    KEY = VALUE
$\backslash\text{setMPvariables}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...,... <sup>2</sup> ...,...] 1    NAME 2    KEY = VALUE
$\backslash\text{setmainbodyfont}$
$\backslash\text{setmainparbuilder}$ [ <sup>1</sup> ...] *    default oneline basic NAME
$\backslash\text{setmarker}$ [ <sup>1</sup> ...] [ <sup>2</sup> ...] 1    NAME 2    NUMBER
$\backslash\text{setmarking}$ [ <sup>1</sup> ...] { <sup>2</sup> ...} 1    MARK 2    TEXT
$\backslash\text{setmathstyle}$ {...,...} *    display text script scriptscript cramped uncramped normal packed small big NAME
$\backslash\text{setmeasure}$ { <sup>1</sup> ...} { <sup>2</sup> ...} 1    NAME 2    DIMENSION
$\backslash\text{setmessagetext}$ { <sup>1</sup> ...} { <sup>2</sup> ...} 1    NAME 2    NAME NUMBER
$\backslash\text{setmode}$ {...} *    NAME
$\backslash\text{setnostrut}$

`\setnote [...]1 [...,2...] {...}3`

1 NAME  
2 REFERENCE  
3 TEXT

`\setnotetext [...]1 [...,2...] {...}3`

1 NAME  
2 REFERENCE  
3 TEXT

`\setnotetext [...]1 [...,2...,...]`

1 NAME  
2 title = TEXT  
bookmark = TEXT  
list = TEXT  
reference = REFERENCE

`\setnote [...]1 [...,2...,...]`

1 NAME  
2 title = TEXT  
bookmark = TEXT  
list = TEXT  
reference = REFERENCE

`\setobject {...}1 {...}2 \... {...}4`

1 NAME  
2 NAME  
3 CSNAME  
4 CONTENT

`\setoldstyle`

`\setpagereference {...}1 {...,2...}`

1 NAME  
2 REFERENCE

`\setpagestate [...]1 [...]2`

1 NAME  
2 NAME NUMBER

`\setpagestaterealpageno {...}1 {...}2`

1 NAME  
2 NAME NUMBER

`\setpenalties \... {...}1 {...}2 {...}3`

1 CSNAME  
2 NUMBER  
3 NUMBER

`\setpercentdimen {...}1 {...}2`

1 DIMENSION CSNAME  
2 DIMENSION NUMBER

`\setperiodkerning [...]`

\* reset NAME

`\setposition {...}`

\* NAME

`\setpositionbox {...}1 \... {...}3`

1 NAME  
2 CSNAME  
3 CONTENT

\setpositiondata {...} {...} {...} {...}

1 NAME  
2 DIMENSION  
3 DIMENSION  
4 DIMENSION

\setpositiondataplus {...} {...} {...} {...} {...,<sup>5</sup>...}

1 NAME  
2 DIMENSION  
3 DIMENSION  
4 DIMENSION  
5 TEXT

\setpositiononly {...}

\* NAME

\setpositionplus {...} {...,<sup>2</sup>...} \<sup>3</sup>... {...}

1 NAME  
2 TEXT  
3 CSNAME  
4 CONTENT

\setpositionstrut {...}

\* NAME

\setprofile [...]

\* none fixed strict halfixed quarterfixed eightsfixed NAME

\setrandomseed {...}

\* NUMBER

\setreference [...,<sup>1</sup>...] [...,<sup>2</sup>...,...]

1 REFERENCE  
2 KEY = VALUE

\setreferencedobject {...} {...} \<sup>3</sup>... {...}

1 NAME  
2 NAME  
3 CSNAME  
4 CONTENT

\setregisterentry [...]<sup>1</sup> [...,<sup>2</sup>...,...]<sup>3</sup> [...,<sup>3</sup>...,...]<sup>OPT</sup>

1 NAME  
2 label = NAME  
keys = TEXT PROCESSOR->TEXT  
entries = TEXT PROCESSOR->TEXT  
keys:1 = TEXT  
keys:2 = TEXT  
keys:3 = TEXT  
entries:1 = TEXT  
entries:2 = TEXT  
entries:3 = TEXT  
alternative = TEXT  
3 KEY = VALUE

\setreplacement [...]

\* reset NAME

\setrigidcolumnbalance ...

\* CSNAME NUMBER

\setrigidcolumnhsize {...} {...} {...}

1 DIMENSION  
2 DIMENSION  
3 NUMBER

```
\setscript [...]
*   hangul hanzi nihongo ethiopic thai test NAME
```

```
\setsecondpasscharacteralign
```

```
\setsectionblock [...] [...] 2...OPT...]
```

```
1  NAME
2  bookmark = TEXT
```

```
\setsimplecolumnhsize [...]...*...]
```

```
*   n           = NUMBER
    width       = DIMENSION
    distance    = DIMENSION
    lines       = NUMBER
```

```
\setsmallbodyfont
```

```
\setsmallcaps
```

```
\setstackbox {1.} {2.} {3.}
```

```
1  NAME
2  NAME
3  CONTENT
```

```
\setstructurepageregister [...] [...] 2...OPT...3...OPT...]
```

```
1  NAME
2  label      = NAME
   keys       = TEXT PROCESSOR->TEXT
   entries    = TEXT PROCESSOR->TEXT
   keys:1     = TEXT
   keys:2     = TEXT
   keys:3     = TEXT
   entries:1  = TEXT
   entries:2  = TEXT
   entries:3  = TEXT
   alternative = TEXT
3  KEY = VALUE
```

```
\setstrut
```

```
\setsuperiors
```

```
\setssystemmode {...}
```

```
*   NAME
```

```
\settabular
```

```
\settaggedmetadata [...]...*...]
```

```
*   KEY = VALUE
```

```
\settextcontent [1.] [2.] [3.] [4.] [5.]
```

```
1  top header text footer bottom OPT OPT
2  text margin edge
3  left middle right
4  date pagenumber MARK TEXT COMMAND
5  date pagenumber MARK TEXT COMMAND
```

```
\settightobject {1.} {2.} \3. {4.}
```

```
1  NAME
2  NAME
3  CSNAME
4  CONTENT
```

<code>\settightreferencedobject {...} {...} \... {...}</code> 1 NAME 2 NAME 3 CSNAME 4 CONTENT
<code>\settightstrut</code>
<code>\settightunreferencedobject {...} {...} \... {...}</code> 1 NAME 2 NAME 3 CSNAME 4 CONTENT
<code>\settrialtypesetting</code>
<code>\setuevalue {...} {...}</code> 1 NAME 2 CONTENT
<code>\setugvalue {...} {...}</code> 1 NAME 2 CONTENT
<code>\setunreferencedobject {...} {...} \... {...}</code> 1 NAME 2 NAME 3 CSNAME 4 CONTENT
<code>\setup [...]</code> * NAME
<code>\setupalign [...,*,...]</code> * broad wide <u>bottom</u> height line high low lohi flushright flushleft middle yes no <u>width</u> normal reset inner outer flushinner flushouter left right center disable last end paragraph lefttoright righttoleft l2r r2l table lessshyphenation morehyphenation hanging nohanging hz fullhz nohz hyphenated nothyphenated tolerant verytolerant stretch extremestretch final 1*final 2*final 3*final 4*final more 1*more 2*more
<code>\setupalternativestyles [...,*=...,...]</code> * method = <u>normal</u> auto
<code>\setuparranging [...,*,...]</code> * disable mirrored doublesided negative 90 180 270 reset background normal 2*16 2*8 2*4 2*2 2**2 2SIDE 2TOP 2UP 2DOWN 2*4*2 2*2*4 2TOPSIDE 2*8*Z 2*6*Z 1*8 1*4 3SIDE TRYPTICHON ZFLYER-8 ZFLYER-10 ZFLYER-12 MAPFLYER-12 DOUBLEWINDOW 1*2-Conference 1*4-Conference 2*2*2 2*2*3 XY NAME
<code>\setupattachment [...,<sup>1</sup>...] [...,<sup>2</sup>=...,...]</code> 1 NAME <small>OPT</small> 2 title = TEXT subtile = TEXT author = TEXT file = FILE name = NAME buffer = BUFFER state = start stop method = <u>normal</u> hidden symbol = Graph Paperclip Pushpin Default width = fit DIMENSION height = fit DIMENSION depth = fit DIMENSION color = COLOR textlayer = NAME location = leftedge rightedge inmargin leftmargin rightmargin <u>text</u> high none distance = DIMENSION

**\setupattachments** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 inherits: \setupattachment

**\setupbackend** [...<sup>\*</sup>,...]

\* export = yes FILE  
xhtml = FILE  
file = FILE  
intent = Coated FOGRA39 (ISO 12647-2:2004) GRACoL2006\_Coated1v2.icc ISO Coated v2 300 ISO Coated v2 (ECI) ISOnewspaper26v4 ISOnewspaper26v4\_gr ISO Uncoated ISO Uncoated Yellowish ISO Web Coated Japan Color 2001 Coated Japan Color 2002 Newspaper Japan Web Coated (Ad) SNAP 2007 SWOP2006\_Coated3v2.icc SWOP2006\_Coated5v2.icc Uncoated FOGRA29 (ISO 12647-2:2004) Web Coated FOGRA28 (ISO 12647-2:2004) PSR\_LWC\_PLUS\_V2\_PT PSR\_LWC\_STD\_V2\_PT PSR\_SC\_PLUS\_V2\_PT PSR\_SC\_STD\_V2\_PT PSRgravureMF  
space = yes no  
xmpfile = FILE  
format = version default PDF/X-1a:2001 PDF/X-1a:2003 PDF/X-3:2002 PDF/X-3:2003 PDF/X-4 PDF/X-4p PDF/X-5g PDF/X-5pg PDF/X-5n PDF/A-1a:2005 PDF/A-1b:2005 PDF/A-2a PDF/A-3a PDF/UA-1  
level = NUMBER  
option = always never  
profile = FILE

**\setupbackground** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 state = start stop  
leftoffset = DIMENSION  
rightoffset = DIMENSION  
topoffset = DIMENSION  
bottomoffset = DIMENSION  
before = COMMAND  
after = COMMAND  
inherits: \setupframed

**\setupbackgrounds** [...<sup>1</sup>,...] [...<sup>2</sup>,...] [...<sup>3</sup>,...]

1 top header text footer bottom OPT  
2 leftedge leftmargin text rightmargin rightedge  
3 inherits: \setupframed

**\setupbackgrounds** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 paper page leftpage rightpage text hidden OPT  
2 state = start stop  
inherits: \setupframed

**\setupbar** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 color = COLOR  
continue = yes no all  
empty = yes no  
unit = ex em pt in cm mm sp bp pc dd cc nc  
order = foreground background  
rulethickness = DIMENSION  
method = NUMBER  
offset = NUMBER  
dy = NUMBER  
max = NUMBER  
foregroundstyle = STYLE COMMAND  
foregroundcolor = COLOR  
mp = NAME  
left = TEXT  
right = TEXT

**\setupbars** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 inherits: \setupbar

**\setupblackrules** [...,<sup>\*</sup>...]

\* width = max DIMENSION  
height = max DIMENSION  
depth = max DIMENSION  
distance = DIMENSION  
n = NUMBER  
alternative = a b  
style = STYLE COMMAND  
color = COLOR  
type = mp yes no  
mp = NAME

**\setupblank** [...,<sup>\*</sup>...]

\* inherits: \blank<sup>OPT</sup>

**\setupbleeding** [...,<sup>\*</sup>...]

\* width = DIMENSION  
height = DIMENSION  
offset = DIMENSION  
hoffset = DIMENSION  
voffset = DIMENSION  
location = t b l r bl lb br rb tl lt tr rt  
stretch = yes no  
page = yes no

**\setupblock** [...,<sup>1</sup>...] [...,<sup>2</sup>...]

1 NAME <sup>OPT</sup>  
2 before = COMMAND  
after = COMMAND  
left = COMMAND  
right = COMMAND  
alternative = paragraph text  
inner = COMMAND  
setups = NAME  
align = left right middle flushleft flushright inner outer  
style = STYLE COMMAND  
color = COLOR

**\setupbodyfont** [...,<sup>\*</sup>...]

\* DIMENSION NAME global<sup>PT</sup>reset x xx small big script scriptscript rm ss tt hw cg roman serif regular sans sansserif support type teletype mono handwritten calligraphic

**\setupbookmark** [...,<sup>\*</sup>...]

\* force = yes no  
number = yes no  
numberseparatorset = NAME  
numberconversionset = NAME  
numberstarter = COMMAND  
numberstopper = COMMAND  
numbersegments = NUMBER NUMBER:NUMBER NUMBER:\* NUMBER:all SECTION:SECTION SECTION:\* SECTION:all  
current  
sectionblock = yes no

**\setupbottom** [<sup>1</sup>...] [...,<sup>2</sup>...]

1 text margin edge<sup>OPT</sup>  
2 inherits: \setuplayouttext

**\setupbottomtexts** [<sup>1</sup>...] [<sup>2</sup>...] [<sup>3</sup>...] [<sup>4</sup>...] [<sup>5</sup>...]

1 text margin edge <sup>OPT</sup> <sup>OPT</sup> <sup>OPT</sup> <sup>OPT</sup> <sup>OPT</sup>  
2 date pagenumber MARK TEXT COMMAND  
3 date pagenumber MARK TEXT COMMAND  
4 date pagenumber MARK TEXT COMMAND  
5 date pagenumber MARK TEXT COMMAND

**\setupbtx** [<sup>1</sup>...] [<sup>2</sup>...,...]

```
1 NAME OPT
2 specification = default apa aps NAME
  dataset       = default NAME
  command       = \...##1
  left          = COMMAND
  right         = COMMAND
  authorconversion = normal normalshort normalinverted invertedshort short
  etallimit     = NUMBER
  etaldisplay   = NUMBER
  etaloption    = last
  stopper      = initials
  interaction   = start stop number text page all
  alternative   = default category entry short page num textnum year index tag keywords author authoryears
                  authornum authoryear
  sorttype     = normal reverse
  compress     = yes no
  default      = default NAME
  style        = STYLE COMMAND
  color        = COLOR
```

**\setupbtxdataset** [<sup>1</sup>...,...] [<sup>2</sup>...,...]

```
1 NAME OPT
2 language = LANGUAGE
```

**\setupbtxlist** [<sup>1</sup>...] [<sup>2</sup>...,...]

```
1 NAME OPT
2 inherits: \setuplist
```

**\setupbtxregister** [<sup>1</sup>...,...] [<sup>2</sup>...,...]

```
1 NAME OPT
2 state      = start stop
  dataset    = NAME
  field      = keyword range pagenumber author
  register   = NAME
  method     = once
  alternative = normalshort invertedshort
  style      = STYLE COMMAND
  color      = COLOR
```

**\setupbtxrendering** [<sup>1</sup>...,...] [<sup>2</sup>...,...]

```
1 NAME OPT
2 textstate   = start stop
  pagestate   = start stop
  separator   = COMMAND
  criterium   = previous cite here all none
  filter      = TEXT
  specification = NAME
  title       = TEXT
  before      = COMMAND
  after       = COMMAND
  dataset     = NAME
  method      = dataset force local global none
  sorttype    = short dataset list reference used default cite index
  repeat      = yes no
  group       = NAME
  numbering   = yes no num index tag short page
```

**\setupbtx** [...]

```
* NAME
```

**\setupbuffer** [<sup>1</sup>...,...] [<sup>2</sup>...,...]

```
1 BUFFER OPT
2 before = COMMAND
  after  = COMMAND
  strip  = yes no
```



```
\setupbutton [...1,...] [...2,...]
1 NAME OPT
2 state = start stop
  samepage = yes no empty none normal default
  style = STYLE COMMAND
  color = COLOR
  contrastcolor = COLOR
  alternative = hidden
  inherits: \setupframed
```

```
\setupcapitals [...1,...] [...2,...]
1 NAME OPT
2 title = yes no
  sc = yes no
  style = STYLE COMMAND
```

```
\setupcaption [...1,...] [...2,...]
1 NAME OPT
2 suffix = COMMAND
  suffixseparator = COMMAND
  suffixstopper = COMMAND
  location = left right middle low high grid lines overlay inner outer innermargin outermargin leftmargin
    rightmargin lefthanging righthanging hang top bottom stretch tolerant verytolerant none
    default
  command = \...##1
  numbercommand = \...##1
  textcommand = \...##1
  spacebefore = inherits: \blank
  spaceinbetween = inherits: \blank
  spaceafter = inherits: \blank
  distance = DIMENSION
  headstyle = STYLE COMMAND
  headcolor = COLOR
  headseparator = TEXT
  inbetween = COMMAND
  style = STYLE COMMAND
  color = COLOR
  topoffset = DIMENSION
  bottomoffset = DIMENSION
  number = yes no none
  group = TEXT
  leftmargin = DIMENSION
  rightmargin = DIMENSION
  innermargin = DIMENSION
  outermargin = DIMENSION
  align = inherits: \setupalign
  width = fit max DIMENSION
  minwidth = fit DIMENSION
  maxwidth = DIMENSION
  inherits: \setupcounter
```

```
\setupcaptions [...1,...] [...2,...]
1 NAME OPT
2 inherits: \setupcaption
```

```
\setupcharacteralign [...*,...]
* leftwidth = DIMENSION
  rightwidth = DIMENSION
  leftsample = TEXT
  rightsample = TEXT
  character = TEXT number->TEXT text->TEXT
```

```
\setupcharacterkerning [...1,...] [...2,...]
1 NAME OPT
2 factor = max NUMBER
  width = DIMENSION
  features = NAME
  style = STYLE COMMAND
  color = COLOR
```

```
\setupcharacterspacing [...1] [...2] [...3...3...]
1 NAME OPT
2 NUMBER
3 left = NUMBER
right = NUMBER
alternative = 0 1
```

```
\setupchemical [...1,...] [...2...2...]
1 NAME OPT
2 strut = yes no auto cap fit line default CHARACTER
width = fit none NUMBER
height = fit none NUMBER
left = fit none NUMBER
right = fit none NUMBER
top = fit none NUMBER
bottom = fit none NUMBER
scale = small medium big normal NUMBER
rotation = NUMBER
symalign = auto
axis = on off
framecolor = COLOR
rulethickness = DIMENSION
offset = DIMENSION
unit = DIMENSION
factor = NUMBER
frame = on off
rulecolor = COLOR
bodyfont = inherits: \setupbodyfont
size = small medium big
style = STYLE COMMAND
color = COLOR
```

```
\setupchemicalframed [...1,...] [...2...2...]
1 NAME OPT
2 inherits: \setupframed
```

```
\setupclipping [...*...*...]
* state = start stop
width = DIMENSION
height = DIMENSION
hoffset = DIMENSION
voffset = DIMENSION
x = NUMBER
y = NUMBER
nx = NUMBER
ny = NUMBER
sx = NUMBER
sy = NUMBER
leftoffset = DIMENSION
rightoffset = DIMENSION
topoffset = DIMENSION
bottomoffset = DIMENSION
mp = NAME
n = NUMBER
offset = DIMENSION
```

```
\setupcollector [...1,...] [...2...2...]
1 NAME OPT
2 rotation = left right inner outer NUMBER
corner = left middle right top bottom
x = DIMENSION
y = DIMENSION
hoffset = DIMENSION
voffset = DIMENSION
location = left middle right top bottom line l c r m t b g
state = start stop
```

```
\setupcolor [...*]
* FILE
```

```
\setupcolors [...,..*...,...]
* state      = start stop
  spot       = yes no
  expansion  = yes no
  factor     = yes no
  rgb        = yes no
  cmyk       = yes no
  conversion = yes no always
  pagecolormodel = auto none NAME
  textcolor  = COLOR
  intent     = overprint knockout none
```

```
\setupcolumns [...,..*...,...]
* n          = NUMBER
  distance   = DIMENSION
  option     = background
  offset     = DIMENSION
  command    = \...##1
  height     = DIMENSION
  direction  = left right
  balance    = yes no
  align      = setupalign
  tolerance  = settolerance
  blank      = inherits: \blank
  ntop       = NUMBER
  rule       = on off COMMAND
```

```
\setupcolumnset [...,1...,...] [...,..2...,...]
1 NAME      OPT
2 n          = NUMBER
  nleft      = NUMBER
  nright     = NUMBER
  width      = DIMENSION auto
  distance   = DIMENSION
  lines      = NUMBER
  maxwidth   = DIMENSION
  maxheight  = DIMENSION
  direction  = normal reverse
  page       = inherits: \page
  inherits: \setupframed
```

```
\setupcolumnsetarea [...,1...,...] [...,..2...,...]
1 NAME      OPT
2 state      = start stop repeat
  x          = NUMBER
  y          = NUMBER
  nx         = NUMBER
  ny         = NUMBER
  style      = STYLE COMMAND
  color      = COLOR
  clipoffset = DIMENSION
  rightoffset = DIMENSION
  inherits: \setupframed
```

```
\setupcolumnsetareatext [...,1...] [...,2...]
1 NAME
2 TEXT
```

```
\setupcolumnsetlines [...,1...] [...,2...] [...,3...] [...,4...]
1 NAME
2 NUMBER
3 NUMBER
4 NUMBER
```

```
\setupcolumnsetspan [...,1...,...] [...,..2...,...]
1 NAME      OPT
2 n          = NUMBER
  style     = STYLE COMMAND
  color     = COLOR
  before    = COMMAND
  after     = COMMAND
  inherits: \setupframed
```

```
\setupcolumnsetstart [...]1 [...]2 [...]3 [...]4
1 NAME
2 NUMBER
3 NUMBER
4 NUMBER
```

```
\setupcolumnspan [...]* [...]*
* n = NUMBER
  inherits: \setupframed
```

```
\setupcombination [...]1 [...]2 [...]2 [...]2
1 NAME OPT
2 nx = NUMBER
  ny = NUMBER
  width = fit DIMENSION
  height = fit DIMENSION
  location = left middle right top bottom
  distance = DIMENSION
  alternative = label text
  align = inherits: \setupalign
  continue = yes no
  before = COMMAND
  after = COMMAND
  inbetween = COMMAND
  style = STYLE COMMAND
  color = COLOR
```

```
\setupcombinedlist [...]1 [...]2 [...]2 [...]2
1 LIST
2 criterium = local intro reference SECTIONBLOCK:reference all SECTIONBLOCK:all text SECTIONBLOCK:text current
              SECTIONBLOCK:current here previous SECTIONBLOCK:previous component SECTION SECTIONBLOCK:SECTION
  reference = NUMBER
  extras = NAME
  order = command all title
  alternative = a b c d e f g left right top bottom command none interactive paragraph horizontal vertical NAME
```

```
\setupCOMBINEDLIST [...]* [...]* [...]*
* inherits: \setupcombinedlist
instances: content
```

```
\setupcontent [...]* [...]* [...]*
* inherits: \setupcombinedlist
```

```
\setupcomment [...]1 [...]2 [...]2 [...]2
1 NAME OPT
2 state = start stop none
  method = normal hidden
  symbol = Comment Help Insert Key Newparagraph Note Paragraph Default
  width = fit DIMENSION
  height = fit DIMENSION
  depth = fit DIMENSION
  title = TEXT
  subtitle = TEXT
  author = TEXT
  nx = NUMBER
  ny = NUMBER
  color = COLOR
  option = xml max
  textlayer = NAME
  location = leftedge rightedge inmargin leftmargin rightmargin text high none
  distance = DIMENSION
  space = yes
  buffer = BUFFER
```

\setupcounter [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```

1  NAME                      OPT
2  start                     = NUMBER
   counter                   = NAME
   method                    = page
   state                     = start stop
   way                       = bypage byblock bytext byhead bySECTION
   prefix                    = yes no
   prefixseparatorset        = NAME
   prefixconversion          = NAME
   prefixconversionset       = NAME
   prefixstarter             = COMMAND PROCESSOR->COMMAND
   prefixstopper             = COMMAND PROCESSOR->COMMAND
   prefixset                 = NAME
   prefixsegments            = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:all SECTION SECTION:SECTION SECTION:* SECTION:all
                               current
   numberorder               = reverse
   numberseparatorset        = NAME
   numberconversion          = NAME
   numberconversionset       = NAME
   numberstarter             = COMMAND PROCESSOR->COMMAND
   numberstopper             = COMMAND PROCESSOR->COMMAND
   numbersegments            = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:all
   type                     = first previous next last number
   criterium                 = strict positive all
   prefixconnector           = COMMAND PROCESSOR->COMMAND

```

\setupdataset [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```

1  NAME                      OPT
2  delay = yes no

```

\setupdelimitedtext [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```

1  NAME                      OPT
2  before                    = COMMAND
   after                     = COMMAND
   language                  = local global LANGUAGE
   method                    = font
   repeat                    = yes no
   location                  = text paragraph margin
   left                      = COMMAND
   middle                    = COMMAND
   right                     = COMMAND
   nextleft                  = COMMAND
   nextright                 = COMMAND
   spacebefore               = inherits: \blank
   spaceafter                = inherits: \blank
   leftmargin                = yes no standard DIMENSION
   rightmargin               = yes no standard DIMENSION
   indenting                 = inherits: \setupindenting
   indentnext                = yes no auto
   style                     = STYLE COMMAND
   color                     = COLOR
   symstyle                  = STYLE COMMAND
   symcolor                  = COLOR

```

`\setupdescription [...1,...] [...2,...]`

```

1  NAME                      OPT
2  title                    = yes no
   level                    = NUMBER
   text                     = TEXT
   headcommand              = \...##1
   before                   = COMMAND
   after                    = COMMAND
   inbetween                = COMMAND
   alternative              = left right inmargin inleft inright margin leftmargin rightmargin innermargin outermargin
                             serried hanging top empty command NAME
   align                    = inherits: \setupalign
   headalign                = inherits: \setupalign
   indenting                = inherits: \setupindenting
   display                  = yes no
   indentnext               = yes no auto
   width                    = fit broad line DIMENSION
   distance                 = none DIMENSION
   stretch                 = NUMBER
   shrink                   = NUMBER
   hang                     = fit broad none margin NUMBER
   closesymbol              = COMMAND
   closecommand             = \...##1
   expansion                = yes no xml
   referenceprefix          = + - TEXT
   sample                   = TEXT
   margin                   = yes no standard DIMENSION
   style                    = STYLE COMMAND
   color                    = COLOR
   headstyle                = STYLE COMMAND
   headcolor                = COLOR
   aligntitle               = yes no

```

`\setupdirections [...*,...]`

```

*  bidi    = on off local global
   method  = one two default
   fences  = yes no
   break   = both before

```

`\setupdocument [...*,...]`

```

*  before    = COMMAND
   after     = COMMAND
   metadata:author = TEXT
   metadata:title  = TEXT
   metadata:subject = TEXT
   metadata:keywords = TEXT
   KEY        = VALUE

```

`\setupeffect [...1,...] [...2,...]`

```

1  NAME                      OPT
2  method                   = none command
   stretch                 = NUMBER
   rulethickness            = DIMENSION
   alternative              = normal inner outer both hidden stretch

```

`\setupenumeration [...,1...] [...,2...,...]`

```
1 NAME OPT
2 title = yes no
  number = yes no
  numbercommand = \...##1
  titledistance = DIMENSION
  titlestyle = STYLE COMMAND
  titlecolor = COLOR
  titlecommand = \...##1
  titleleft = COMMAND
  titleright = COMMAND
  left = COMMAND
  right = COMMAND
  symbol = COMMAND
  starter = COMMAND
  stopper = COMMAND
  coupling = NAME
  counter = NAME
  level = NUMBER
  text = TEXT
  headcommand = \...##1
  before = COMMAND
  after = COMMAND
  inbetween = COMMAND
  alternative = left right inmargin inleft inright margin leftmargin rightmargin innermargin outermargin
               serried hanging top empty command NAME
  align = inherits: \setupalign
  headalign = inherits: \setupalign
  indenting = inherits: \setupindenting
  display = yes no
  indentnext = yes no auto
  width = fit broad line DIMENSION
  distance = none DIMENSION
  stretch = NUMBER
  shrink = NUMBER
  hang = fit broad none margin NUMBER
  closesymbol = COMMAND
  closecommand = \...##1
  expansion = yes no xml
  referenceprefix = + - TEXT
  sample = TEXT
  margin = yes no standard DIMENSION
  style = STYLE COMMAND
  color = COLOR
  headstyle = STYLE COMMAND
  headcolor = COLOR
  aligntitle = yes no
  inherits: \setupcounter
```

`\setupenumerations [...,1...] [...,2...,...]`

```
1 NAME OPT
2 inherits: \setupenumeration
```

`\setupenv [...,*...,...]`

```
* set = COMMAND
  reset = COMMAND
  KEY = VALUE
```

`\setupexport [...,*...,...]`

```
* align = flushleft middle flushright normal
  bodyfont = DIMENSION
  width = DIMENSION
  title = TEXT
  subtitle = TEXT
  author = TEXT
  alternative = html div
  properties = yes no
  hyphen = yes no
  cssfile = FILE
  firstpage = FILE
  lastpage = FILE
```

`\setupexternalfigure [...1,...] [...2,...,...]`

```

1  NAME                                OPT
2  width                             = DIMENSION
   height                           = DIMENSION
   label                             = NAME
   page                              = NUMBER
   object                            = yes no
   prefix                            = TEXT
   method                            = pdf mps jpg png jp2 jbig svg eps gif tif mov buffer tex cld auto
   controls                          = yes no
   preview                           = yes no
   mask                              = none
   resolution                         = NUMBER
   color                             = COLOR
   arguments                         = TEXT
   repeat                            = yes no
   factor                            = fit broad max auto default
   hfactor                           = fit broad max auto default
   wfactor                           = fit broad max auto default
   maxwidth                          = DIMENSION
   maxheight                         = DIMENSION
   equalwidth                        = DIMENSION
   equalheight                       = DIMENSION
   scale                             = NUMBER
   xscale                            = NUMBER
   yscale                            = NUMBER
   s                                 = NUMBER
   sx                                = NUMBER
   sy                                = NUMBER
   lines                             = NUMBER
   location                          = local global default
   directory                         = PATH
   option                            = test frame empty
   foregroundcolor                   = COLOR
   reset                             = yes no
   background                        = color foreground NAME
   frame                             = on off
   backgroundcolor                   = COLOR
   xmax                             = NUMBER
   ymax                             = NUMBER
   frames                            = on off
   interaction                       = yes all none reference layer bookmark
   bodyfont                          = DIMENSION
   comment                           = COMMAND TEXT
   size                              = none media crop trim art
   cache                             = PATH
   resources                         = PATH
   display                           = FILE
   conversion                        = TEXT
   order                             = LIST
   crossreference                    = yes no NUMBER
   transform                         = auto NUMBER
   userpassword                      = TEXT
   ownerpassword                     = TEXT

```

`\setupexternalsoundtracks [...*,...,...]`

\* option = repeat

`\setupfacingfloat [...1,...] [...2,...,...]`

```

1  NAME                                OPT
2  inbetween                          = COMMAND
   page                              = inherits: \page
   spaceinbetween                    = inherits: \blank
   style                             = STYLE COMMAND
   color                             = COLOR
   inherits: \setupframed

```

`\setupfield [...1,...] [...2,...] [...3,...,...4] [...4,...,...5] [...5,...,...]`

```

1  NAME                                OPT          OPT          OPT
2  reset label frame horizontal vertical
3  inherits: \setupfieldtotalframed
4  inherits: \setupfieldlabelframed
5  inherits: \setupfieldcontentframed

```



`\setupfieldbody [...1,...] [...2,...]`

```
1 NAME OPT
2 category = NAME
  inherits: \setupfieldcategory
```

`\setupfieldcategory [...1,...] [...2,...]`

```
1 NAME OPT
2 start = NUMBER
  style = STYLE COMMAND
  color = COLOR
  type = radio sub text line push check signature
  values = TEXT
  default = TEXT
  fieldframecolor = COLOR
  fieldbackgroundcolor = COLOR
  width = DIMENSION
  height = DIMENSION
  depth = DIMENSION
  align = left middle right flushleft center flushright
  n = NUMBER
  symbol = NAME
  fieldlayer = NAME
  option = readonly required protected sorted unavailable nocheck fixed file hidden printable auto
  clickin = REFERENCE
  clickout = REFERENCE
  regionin = REFERENCE
  regionout = REFERENCE
  afterkey = REFERENCE
  format = REFERENCE
  validate = REFERENCE
  calculate = REFERENCE
  focusin = REFERENCE
  focusout = REFERENCE
  openpage = REFERENCE
  closepage = REFERENCE
```

`\setupfieldcontentframed [...1,...] [...2,...]`

```
1 NAME OPT
2 inherits: \setupframed inherits: \setupfieldcategory
```

`\setupfieldlabelframed [...1,...] [...2,...]`

```
1 NAME OPT
2 inherits: \setupframed
```

`\setupfields [...1,...] [...2,...] [...3,...] [...4,...]`

```
1 reset label frame OPT horizontal vertical OPT
2 inherits: \setupfieldtotalframed
3 inherits: \setupfieldlabelframed
4 inherits: \setupfieldcontentframed
```

`\setupfieldtotalframed [...1,...] [...2,...]`

```
1 NAME OPT
2 before = COMMAND
  after = COMMAND
  inbetween = COMMAND
  distance = DIMENSION
  alternative = reset label frame horizontal vertical
  inherits: \setupframed
```

`\setupfiller [...1,...] [...2,...]`

```
1 NAME OPT
2 leftmargin = DIMENSION
  rightmargin = DIMENSION
  left = COMMAND
  right = COMMAND
  alternative = symbol stretch rule space
  method = local global middle broad
  width = DIMENSION
  height = DIMENSION
  depth = DIMENSION
  offset = DIMENSION
  distance = DIMENSION
  align = left right middle flushleft flushright inner outer
  symbol = COMMAND
  style = STYLE COMMAND
  color = COLOR
```

`\setupfillinlines [...*,...]`

```
* before = COMMAND
  after = COMMAND
  margin = DIMENSION
  width = DIMENSION
  distance = DIMENSION
  rulethickness = DIMENSION
  color = COLOR
```

`\setupfillinrules [...*,...]`

```
* before = COMMAND
  after = COMMAND
  n = NUMBER
  interlinespace = small medium big NUMBER
  distance = DIMENSION
  width = fit broad DIMENSION
  separator = COMMAND
  style = STYLE COMMAND
  color = COLOR
```

`\setupfirstline [...1,...] [...2,...]`

```
1 NAME OPT
2 n = NUMBER
  alternative = default line word
  style = STYLE COMMAND
  color = COLOR
```

`\setupfittingpage [...1,...] [...2,...]`

```
1 NAME OPT
2 pagestate = start stop
  command = \...##1
  margin = page
  scale = NUMBER
  paper = auto default NAME
  inherits: \setupframed
```

```

\setupfloat [...1,...] [...2,...]
1 SINGULAR OPT
2 indentnext = yes no auto
   default = inherits: \placefloat
   fallback = inherits: \placefloat
   inner = COMMAND
   criterium = DIMENSION
   method = NUMBER
   sidemethod = NUMBER
   textmethod = NUMBER
   sidealign = height depth line halfline grid normal
   grid = inherits: \suptogrid
   local = yes no
   command = \...##1
   availablewidth = DIMENSION
   availableheight = DIMENSION
   minwidth = DIMENSION
   maxwidth = DIMENSION
   location = left right middle flushleft flushright center max inner outer innermargin outermargin
             inneredge outeredge backspace cutspace leftmargin rightmargin leftedge rightedge
   leftmargindistance = DIMENSION
   rightmargindistance = DIMENSION
   leftmargin = DIMENSION
   rightmargin = DIMENSION
   innermargin = DIMENSION
   outermargin = DIMENSION
   bottombefore = COMMAND
   bottomafter = COMMAND
   expansion = yes no xml
   referenceprefix = + - TEXT
   xmlsetup = NAME
   catcodes = NAME
   freeregion = yes no
   spacebefore = none inherits: \blank
   spaceafter = none inherits: \blank
   width = DIMENSION
   height = DIMENSION
   offset = DIMENSION none overlay
   sidespacebefore = none inherits: \blank
   sidespaceafter = none inherits: \blank
   spacebeforeinside = none inherits: \blank
   spaceafterside = none inherits: \blank
   sidethreshold = old dimension
   margin = DIMENSION
   ntop = NUMBER
   nbottom = NUMBER
   step = small medium big line depth
   nlines = NUMBER
   cache = yes no

```

```

\setupfloats [...1,...] [...2,...]
1 SINGULAR OPT
2 inherits: \setupfloat

```

```

\setupfloatsplitting [...*,...]
* before = COMMAND
  after = COMMAND
  inbetween = COMMAND
  lines = auto NUMBER
  conversion = NAME

```

```

\setupfontexpansion [...1] [...2,...]
1 NAME
2 vector = NAME
   factor = NUMBER
   stretch = NUMBER
   shrink = NUMBER
   step = NUMBER

```

```

\setupfontprotrusion [...1] [...2,...]
1 NAME
2 vector = NAME
   factor = NUMBER
   left = NUMBER
   right = NUMBER

```

```
\setupfonts [...,.*,...]
```

```
* language = no auto
```

```
\setupfontsolution [...,1...] [...,..2...,...]
```

```
1 NAME OPT
2 goodies = FILE
  solution = NAME
  less = NAME
  more = NAME
  method = preroll split normal reverse random
  criterium = NUMBER
```

```
\setupfooter [...]1 [...,..2...,...]
```

```
1 text margin edgeOPT
2 inherits: \setuplayouttext
```

```
\setupfootertexts [...]1 [...]2 [...]3 [...]4 [...]5
```

```
1 text margin edge OPT OPT OPT OPT OPT
2 date pagenumber MARK TEXT COMMAND
3 date pagenumber MARK TEXT COMMAND
4 date pagenumber MARK TEXT COMMAND
5 date pagenumber MARK TEXT COMMAND
```

```
\setupforms [...,.*,...]
```

```
* method = XML HTML PDF
  export = yes no
```

```
\setupformula [...,1...] [...,..2...,...]
```

```
1 NAME OPT
2 location = left right
  align = left middle right flushleft center flushright normal
  split = yes no page
  strut = yes no
  distance = DIMENSION
  left = COMMAND
  right = COMMAND
  spacebefore = inherits: \blank
  spaceafter = inherits: \blank
  numbercommand = \...##1
  color = COLOR
  numberstyle = STYLE COMMAND
  numbercolor = COLOR
  option = packed tight middle frame depth line halflines -line -halflines inherits: \setupbodyfont
  margin = yes no standard DIMENSION
  leftmargin = DIMENSION
  rightmargin = DIMENSION
  alternative = NAME
  indentnext = yes no auto
  grid = inherits: \suptogrid
  frame = number
  hang = none auto
  expansion = yes no xml
  referenceprefix = + - TEXT
  xmlsetup = NAME
  catcodes = NAME
  inherits: \setupcounter
```

```
\setupformulaframed [...,1...] [...,..2...,...]
```

```
1 NAME OPT
2 inherits: \setupframed
```

```
\setupformulas [...,1...] [...,..2...,...]
```

```
1 NAME OPT
2 inherits: \setupformula
```

`\setupframed [...1,...] [...2...,...]`

```

1  NAME          OPT
2  corner         = rectangular round NUMBER
   framecorner    = rectangular round NUMBER
   backgroundcorner = rectangular round NUMBER
   radius         = DIMENSION
   frameradius    = DIMENSION
   backgroundradius = DIMENSION
   depth         = DIMENSION
   frameddepth    = DIMENSION
   backgrounddepth = DIMENSION
   framecolor     = COLOR
   topframe       = on off NAME
   bottomframe    = on off NAME
   leftframe      = on off NAME
   rightframe     = on off NAME
   region         = yes no
   rulethickness  = DIMENSION
   frameoffset    = DIMENSION
   frame         = on off overlay none
   background     = foreground color NAME
   backgroundoffset = frame DIMENSION
   component      = NAME
   extras         = COMMAND
   foregroundstyle = STYLE COMMAND
   foregroundcolor = COLOR
   setups         = NAME
   offset         = default overlay none DIMENSION
   width          = local fit max broad fixed DIMENSION
   height         = fit max broad DIMENSION
   align          = inherits: \setupalign
   strut          = yes no none local global
   autostrut      = yes no
   location       = height depth high low top middle bottom line lohi hanging keep formula mathematics normal
   autowidth      = yes no force
   lines          = NUMBER
   top            = COMMAND
   bottom         = COMMAND
   blank          = yes no
   profile        = NAME
   empty          = yes no
   loffset        = DIMENSION
   roffset        = DIMENSION
   toffset        = DIMENSION
   boffset        = DIMENSION
   orientation    = NUMBER

```

`\setupframedcontent [...1,...] [...2...,...]`

```

1  NAME          OPT
2  left          = COMMAND
   right         = COMMAND
   leftoffset    = DIMENSION
   rightoffset   = DIMENSION
   topoffset     = DIMENSION
   bottomoffset  = DIMENSION
   linecorrection = yes no
   inherits: \setupframed

```

`\setupframedtable [...1.] [...2...,...]`

```

1  NAME          OPT
2  before        = COMMAND
   after         = COMMAND
   inbetween     = COMMAND
   distance      = DIMENSION
   inherits: \setupframed

```

`\setupframedtablecolumn [...1.] [...2.] [...3...,...]`

```

1  NAME          OPT
2  NUMBER each
3  inherits: \setupframed

```

`\setupframedtablerow [...1.] [...2.] [...3...,...]`

```

1  NAME          OPT
2  NUMBER each
3  inherits: \setupframed

```

```

\setupframedtext [...1,...] [...2...2...]
1  NAME                      OPT
2  left                      = COMMAND
   right                    = COMMAND
   inner                    = COMMAND
   location                  = left right middle none
   depthcorrection          = on off
   bodyfont                  = inherits: \setupbodyfont
   indenting                 = inherits: \setupindenting
   style                     = STYLE COMMAND
   color                     = COLOR
   inherits: \setupframedinherits: \setupplacement

```

```

\setupframedtexts [...1,...] [...2...2...]
1  NAME                      OPT
2  inherits: \setupframedtext

```

```

\setupglobalreferenceprefix [...*]
*  + - TEXT

```

**\setuphead** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```

1  SECTION OPT
2  frontpartlabel      = NAME
   bodypartlabel       = NAME
   appendixlabel       = NAME
   backpartlabel       = NAME
   expansion           = yes no xml
   catcodes            = NAME
   sectionresetset     = NAME
   sectionseparatorset = NAME
   sectionconversionset = NAME
   conversion          = NAME
   sectionstarter      = COMMAND PROCESSOR->COMMAND
   sectionstopper      = COMMAND PROCESSOR->COMMAND
   sectionset          = NAME
   sectionsegments     = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:all SECTION SECTION:SECTION SECTION:* SECTION:all
                        current
   referenceprefix     = + - TEXT
   style               = STYLE COMMAND
   color               = COLOR
   textstyle           = STYLE COMMAND
   textcolor           = COLOR
   numberstyle         = STYLE COMMAND
   numbercolor         = COLOR
   coupling            = SECTION
   ownnumber           = yes no
   beforesection       = COMMAND
   aftersection        = COMMAND
   insidesection       = COMMAND
   incrementnumber     = yes no list empty
   placehead           = yes no hidden empty section
   number              = yes no
   page                = inherits: \page
   marking             = page reset
   header              = start stop high none normal empty nomarking NAME
   text                = start stop high none normal empty nomarking NAME
   footer              = start stop high none normal empty nomarking NAME
   before              = COMMAND
   after               = COMMAND
   inbetween           = COMMAND
   continue            = yes no
   aligntitle          = yes no float
   interlinespace      = NAME
   interaction         = list reference
   internalgrid        = NAME
   grid                = normal standard yes strict tolerant top bottom both broad fit first last high one low
                        none line strut box min max middle math math:line math:halfline math:-line math:-halfline
                        NAME
   align               = inherits: \setupalign
   tolerance           = inherits: \setuptolerance
   strut               = yes no
   hang                = line broad fit none NUMBER
   margin              = DIMENSION
   indentnext          = yes no auto
   alternative         = text paragraph normal margin inmargin top middle bottom reverse margintext NAME
   width               = DIMENSION
   numberwidth         = DIMENSION
   textwidth           = DIMENSION
   distance            = DIMENSION
   textdistance        = DIMENSION
   commandbefore       = COMMAND
   commandafter        = COMMAND
   command             = \...##1##2
   textcommand         = \...##1
   deeptextcommand     = \...##1
   numbercommand       = \...##1
   deepnumbercommand   = \...##1
   location            = NAME
   criterium           = strict positive all

```

**\setupheadalternative** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```

1  NAME OPT
2  alternative      = horizontal vertical somewhere
   renderingsetup   = NAME

```

**\setupheader** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```

1  text margin edge OPT
2  inherits: \setuplayouttext

```

```
\setupheadertexts [...1] [...2] [...3] [...4] [...5]
1  text margin edge      OPT      OPT      OPT      OPT      OPT
2  date pagenumber MARK TEXT COMMAND
3  date pagenumber MARK TEXT COMMAND
4  date pagenumber MARK TEXT COMMAND
5  date pagenumber MARK TEXT COMMAND
```

```
\setupheadnumber [...1] [...2]
1  SECTION
2  [-+]NUMBER
```

```
\setupheads [...,1...] [...,2...]
1  SECTION      OPT
2  inherits: \setuphead
```

```
\setuphelp [...,1...] [...,2...]
1  NAME      OPT
2  inherits: \setupframed
```

```
\setuphigh [...,1...] [...,2...]
1  NAME      OPT
2  distance  = DIMENSION
   up        = DIMENSION
   style     = STYLE COMMAND
   color     = COLOR
```

```
\setuphighlight [...,1...] [...,2...]
1  NAME      OPT
2  command   = yes no
   style     = STYLE COMMAND
   color     = COLOR
```

```
\setuphyphenation [...,*...]
*  method = original tex default hyphenate expanded traditional none
```

```
\setuphyphenmark [...,*...]
*  sign = normal wide
```

```
\setupindentedtext [...,1...] [...,2...]
1  NAME      OPT
2  before    = COMMAND
   after     = COMMAND
   distance  = DIMENSION
   sample    = TEXT
   text      = TEXT
   width     = fit broad DIMENSION
   separator = COMMAND
   style     = STYLE COMMAND
   color     = COLOR
   headstyle = STYLE COMMAND
   headcolor = COLOR
```

```
\setupindenting [...,*...]
*  [-+]small [-+]medium [ETbig none no not first next yes always never odd even normal reset toggle DIMENSION NAME
```



`\setupinitial [...,1...] [...,2...,...]`

```
1 NAME OPT
2 n = NUMBER
  m = NUMBER
  before = COMMAND
  distance = DIMENSION
  hoffset = DIMENSION
  voffset = line DIMENSION
  style = STYLE COMMAND
  color = COLOR
  font = FONT
  text = TEXT
  location = margin text
  method = first last auto none
```

`\setupinsertion [...,1...] [...,2...,...]`

```
1 NAME OPT
2 location = page text columns firstcolumn lastcolumn
```

`\setupinteraction [...,1...] [...,2...,...]`

```
1 NAME OPT
2 state = start stop
  style = STYLE COMMAND
  color = COLOR
  contrastcolor = COLOR
  title = TEXT
  subtitle = COLOR
  author = TEXT
  date = TEXT
  keyword = TEXT
  focus = standard frame width minwidth height minheight fit tight
  menu = on off
  fieldlayer = auto NAME
  calculate = REFERENCE
  click = yes no
  display = normal new
  page = yes no page name auto
  openaction = REFERENCE
  closeaction = REFERENCE
  openpageaction = REFERENCE
  closepageaction = REFERENCE
  symbolset = NAME
  height = DIMENSION
  depth = DIMENSION
  focusoffset = DIMENSION
```

`\setupinteractionbar [...,1...] [...,2...,...]`

```
1 NAME OPT
2 alternative = a b c d e f g
  state = start stop
  command = CSNAME
  width = DIMENSION
  height = DIMENSION max broad
  depth = DIMENSION max
  distance = DIMENSION
  step = small medium big
  backgroundcolor = COLOR
  style = STYLE COMMAND
  color = COLOR
  contrastcolor = COLOR
  symbol = yes no
  inherits: \setupframed
```

`\setupinteractionmenu [...1,...] [...2,...]`

1 NAME OPT  
2 alternative = vertical horizontal hidden  
category = NAME  
leftoffset = overlay frame none default DIMENSION  
rightoffset = overlay frame none default DIMENSION  
topoffset = overlay frame none default DIMENSION  
bottomoffset = overlay frame none default DIMENSION  
maxwidth = DIMENSION  
maxheight = DIMENSION  
itemalign = left middle right flushleft flushright low high lohi  
state = start empty local  
left = COMMAND  
right = COMMAND  
distance = overlay DIMENSION  
before = COMMAND  
after = COMMAND  
inbetween = COMMAND  
position = yes no  
middle = COMMAND  
style = STYLE COMMAND  
color = COLOR  
samepage = yes no empty none normal default  
contrastcolor = COLOR  
inherits: \setupframed

`\setupinteractionscreen [...*,...]`

\* width = fit max tight DIMENSION  
height = fit max tight DIMENSION  
backspace = DIMENSION  
horoffset = DIMENSION  
veroffset = DIMENSION  
topspace = DIMENSION  
option = fit max singlesided doublesided bookmark auto none default fixed landscape portrait page paper  
attachment layer title  
copies = NUMBER  
print = LIST  
delay = none NUMBER

`\setupinteraction [...]`

\* NAME OPT

`\setupinterlinespace [...1,...] [...2,...]`

1 NAME OPT  
2 line = DIMENSION  
height = NUMBER  
depth = NUMBER  
minheight = NUMBER  
mindepth = NUMBER  
distance = DIMENSION  
top = NUMBER height  
bottom = NUMBER  
stretch = NUMBER  
shrink = NUMBER

`\setupinterlinespace [...*,...]`

\* on off reset auto small medium <sup>off</sup> big NUMBER DIMENSION

`\setupinterlinespace [...]`

\* NAME

`\setupitaliccorrection [...*,...]`

\* text always global none

```

\setupitemgroup [...1] [...2,...] [...3,...] [...4,...=...,...]
1  NAME                                OPT      OPT      OPT
2  each NUMBER
3  intro random continue packed autointro broad text before after nowhite margin inmargin atmargin intext loose fit
   nofit paragraph joinedup serried stopper nostopper unpacked repeat norepeat reverse columns one two three four
   five six seven eight nine standard NUMBER*broad NUMBER*serried horizontal NAME
4  before      = COMMAND
   after       = COMMAND
   inbetween   = COMMAND
   beforehead  = COMMAND
   afterhead   = COMMAND
   lefttext    = COMMAND
   righttext   = COMMAND
   left        = COMMAND
   right       = COMMAND
   factor      = NUMBER
   step        = DIMENSION
   width       = DIMENSION
   distance    = DIMENSION
   margin      = yes no standard DIMENSION
   leftmargin  = yes no standard DIMENSION
   rightmargin = yes no standard DIMENSION
   align       = inherits: \setupalign
   indenting   = inherits: \setupindenting
   start       = NUMBER
   symalign    = left middle right flushleft center flushright
   symbol      = NAME
   n           = NUMBER
   indentnext  = yes no auto
   inner       = COMMAND
   command     = CSNAME
   items       = NUMBER
   maxwidth    = DIMENSION
   itemalign   = left right middle flushleft flushright inner outer
   alignsymbol = yes no
   textdistance = small medium big none space DIMENSION
   placestopper = yes no
   style       = STYLE COMMAND
   color       = COLOR
   headstyle   = STYLE COMMAND
   headcolor   = COLOR
   marstyle    = STYLE COMMAND
   marcolor    = COLOR
   symstyle    = STYLE COMMAND
   symcolor    = COLOR
   grid        = inherits: \definegridsnapping
   inherits: \setupcounter

```

```

\setupitemgroups [...1,...] [...2,...=...,...]
1  NAME NAME:NUMBER      OPT
2  inherits: \setupitemgroup

```

**\setupitemgroup** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```

1  NAME NAME:NUMBER      OPT
2  before      = COMMAND
   after       = COMMAND
   inbetween   = COMMAND
   beforehead  = COMMAND
   afterhead   = COMMAND
   lefttext    = COMMAND
   righttext   = COMMAND
   left        = COMMAND
   right       = COMMAND
   factor      = NUMBER
   step        = DIMENSION
   width       = DIMENSION
   distance    = DIMENSION
   option      = intro random continue packed autointro broad text before after nowhite margin inmargin atmargin
                  intext loose fit nofit paragraph joinedup serried stopper unpacked repeat norepeat reverse
                  columns one two three four five six seven eight nine standard NUMBER*broad NUMBER*serried horizontal
                  NAME
   margin      = yes no standard DIMENSION
   leftmargin  = yes no standard DIMENSION
   rightmargin = yes no standard DIMENSION
   align       = inherits: \setupalign
   indenting   = inherits: \setupindenting
   start       = NUMBER
   symalign    = left middle right flushleft center flushright
   symbol      = NAME
   n          = NUMBER
   indentnext  = yes no auto
   inner       = COMMAND
   command     = CSNAME
   items       = NUMBER
   maxwidth    = DIMENSION
   itemalign   = left right middle flushleft flushright inner outer
   alignsymbol = yes no
   textdistance = small medium big none space DIMENSION
   placestopper = yes no
   style       = STYLE COMMAND
   color       = COLOR
   headstyle   = STYLE COMMAND
   headcolor   = COLOR
   marstyle    = STYLE COMMAND
   marcolor    = COLOR
   symstyle    = STYLE COMMAND
   symcolor    = COLOR
   grid        = inherits: \definegridsnapping
   inherits: \setupcounter

```

**\setupITEMGROUP** [...<sup>1</sup>,...] [...<sup>2</sup>,...] [...<sup>3</sup>,...]

```

1  each NUMBER      OPT      OPT      OPT
2  inherits: \setupitemgroup
3  inherits: \setupitemgroup
instances: itemize

```

**\setupitemize** [...<sup>1</sup>,...] [...<sup>2</sup>,...] [...<sup>3</sup>,...]

```

1  each NUMBER      OPT      OPT      OPT
2  inherits: \setupitemgroup
3  inherits: \setupitemgroup

```

**\setupitems** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```

1  NAME      OPT
2  alternative = left right top bottom inmargin
   textwidth  = DIMENSION
   width      = DIMENSION
   distance   = DIMENSION
   symbol     = none NAME
   align      = left middle right flushleft flushright inner outer margin
   textalign  = left middle right flushleft flushright inner outer
   n         = NUMBER
   before     = COMMAND
   after      = COMMAND
   inbetween  = COMMAND

```

```

\setuplabel [...1...]2 [...2...]1
1  NAME                OPT
2  title                = yes no
   number               = yes no
   numbercommand        = \...##1
   titledistance        = DIMENSION
   titlestyle           = STYLE COMMAND
   titlecolor           = COLOR
   titlecommand         = \...##1
   titleleft            = COMMAND
   titleright           = COMMAND
   left                 = COMMAND
   right                = COMMAND
   symbol               = COMMAND
   starter              = COMMAND
   stopper              = COMMAND
   coupling              = NAME
   counter              = NAME
   level                = NUMBER
   text                 = TEXT
   headcommand          = \...##1
   before               = COMMAND
   after                = COMMAND
   inbetween            = COMMAND
   alternative          = left right inmargin inleft inright margin leftmargin rightmargin innermargin outermargin
                        serried hanging top empty command intext NAME
   align                = inherits: \setupalign
   headalign            = inherits: \setupalign
   indenting            = inherits: \setupindenting
   display              = yes no
   indentnext           = yes no auto
   width                = fit broad line DIMENSION
   distance             = none DIMENSION
   stretch             = NUMBER
   shrink               = NUMBER
   hang                 = fit broad none margin NUMBER
   closesymbol          = COMMAND
   closecommand         = \...##1
   expansion            = yes no xml
   referenceprefix      = + - TEXT
   sample               = TEXT
   margin               = yes no standard DIMENSION
   style                = STYLE COMMAND
   color                = COLOR
   headstyle            = STYLE COMMAND
   headcolor            = COLOR
   aligntitle           = yes no
   inherits: \setupcounter

```

```

\setupLABELtext [...1...]2 [...2...]1
1  LANGUAGE            OPT
2  KEY = VALUE
instances: head label mathlabel taglabel unit operator prefix suffix btxlabel

```

```

\setupbtxlabeltext [...1...]2 [...2...]1
1  LANGUAGE            OPT
2  KEY = VALUE

```

```

\setupheadtext [...1...]2 [...2...]1
1  LANGUAGE            OPT
2  KEY = VALUE

```

```

\setuplabeltext [...1...]2 [...2...]1
1  LANGUAGE            OPT
2  KEY = VALUE

```

```

\setupmathlabeltext [...1...]2 [...2...]1
1  LANGUAGE            OPT
2  KEY = VALUE

```

```

\setupoperatortext [...1...]2 [...2...]1
1  LANGUAGE            OPT
2  KEY = VALUE

```

`\setupprefixtext [...]1 [...,...2...]`

1 LANGUAGE OPT

2 KEY = VALUE

`\setupsuffixtext [...]1 [...,...2...]`

1 LANGUAGE OPT

2 KEY = VALUE

`\setuptaglabeltext [...]1 [...,...2...]`

1 LANGUAGE OPT

2 KEY = VALUE

`\setupunittext [...]1 [...,...2...]`

1 LANGUAGE OPT

2 KEY = VALUE

`\setuplanguage [...]1 [...,...2...]`

1 LANGUAGE default OPT

2 default = LANGUAGE  
state = start stop  
date = inherits: \currentdate  
time = inherits: \currenttime  
patterns = FILE  
lefthyphenmin = NUMBER  
righthyphenmin = NUMBER  
lefthyphenchar = NUMBER  
righthyphenchar = NUMBER  
setups = NAME  
spacing = broad packed  
font = auto  
bidi = left right l2r r2l  
text = TEXT  
limittext = TEXT  
hyphen = TEXT  
compoundhyphen = TEXT  
leftcompoundhyphen = TEXT  
rightcompoundhyphen = TEXT  
leftquote = COMMAND  
rightquote = COMMAND  
leftquotation = COMMAND  
rightquotation = COMMAND  
leftspeech = COMMAND  
rightspeech = COMMAND  
leftsentence = COMMAND  
middlespeech = COMMAND  
rightsentence = COMMAND  
midsentence = COMMAND  
leftsubsentence = COMMAND  
rightsubsentence = COMMAND  
factor = yes no

`\setuplayer [...,1...] [...,2...]`

```

1  NAME          OPT
2  state         = start stop continue next repeat
   option        = test
   page          = NUMBER
   width         = DIMENSION
   height        = DIMENSION
   region        = NAME
   rotation      = left right inner outer NUMBER
   position      = yes no overlay
   hoffset       = max DIMENSION
   voffset       = max DIMENSION
   offset        = DIMENSION
   dx            = DIMENSION
   dy            = DIMENSION
   sx            = NUMBER
   sy            = NUMBER
   x             = DIMENSION
   y             = DIMENSION
   corner        = left middle right top bottom
   location      = grid left middle right top bottom line l c r m t b g
   line          = NUMBER
   column        = NUMBER
   direction     = normal reverse
   doublesided   = yes no
   method        = fit overlay
   repeat        = yes
   preset        = lefttop righttop leftbottom rightbottom middle middletop middlebottom middleleft middleright
                  leftopleft lefttopright NAME

```

`\setuplayeredtext [...,1...] [...,2...]`

```

1  NAME          OPT
2  style = STYLE COMMAND
   color = COLOR
   inherits: \setupframed

```

\setuplayout [...]<sup>1</sup> [...,...<sup>2</sup>...,...]

```

1  NAME          OPT
2  state          = start stop normal repeat
   margin         = DIMENSION
   edge           = DIMENSION
   margindistance = DIMENSION
   edgedistance   = DIMENSION
   leftedgedistance = DIMENSION
   rightedgedistance = DIMENSION
   leftmargindistance = DIMENSION
   rightmargindistance = DIMENSION
   topdistance    = DIMENSION
   headerdistance  = DIMENSION
   footerdistance  = DIMENSION
   bottomdistance  = DIMENSION
   preset         = NAME
   leftmargin     = DIMENSION
   rightmargin    = DIMENSION
   leftedge       = DIMENSION
   rightedge      = DIMENSION
   header         = DIMENSION
   footer         = DIMENSION
   top            = DIMENSION
   bottom         = DIMENSION
   backspace      = DIMENSION
   topspace       = DIMENSION
   setups         = NAME
   cutspace       = DIMENSION
   width          = DIMENSION middle fit
   bottomspace    = DIMENSION
   lines          = NUMBER
   height         = DIMENSION middle fit
   horoffset      = DIMENSION
   veroffset      = DIMENSION
   columns        = NUMBER
   columndistance = DIMENSION
   method         = default normal NAME
   location       = left middle right top bottom singlesided doublesided
   textwidth      = DIMENSION
   textheight     = DIMENSION
   nx            = NUMBER
   ny            = NUMBER
   dx            = DIMENSION
   dy            = DIMENSION
   scale         = NUMBER
   sx            = NUMBER
   sy            = NUMBER
   marking        = on off page empty color one two four
   grid           = yes no off
   textdistance   = DIMENSION
   alternative     = default normal makeup NAME
   clipoffset     = DIMENSION
   cropoffset     = DIMENSION auto
   trimoffset     = DIMENSION
   bleedoffset    = DIMENSION
   artoffset      = DIMENSION

```

\setuplayouttext [...]<sup>1</sup> [...]<sup>2</sup> [...,...<sup>3</sup>...,...]

```

1  top header text footer bottomOPT
2  text margin edge
3  state          = start stop empty high none normal nomarking NAME
   style          = STYLE COMMAND
   color          = COLOR
   strut         = yes no
   n             = NUMBER
   before        = COMMAND
   after         = COMMAND
   leftstyle     = STYLE COMMAND
   rightstyle    = STYLE COMMAND
   leftcolor     = COLOR
   rightcolor    = COLOR
   width         = DIMENSION
   leftwidth     = DIMENSION
   rightwidth    = DIMENSION

```

\setuplayout [...]

\* reset NAME



`\setuplinefiller [...,1...] [...,2...,...]`

```
1  NAME                OPT
2  location             = left right both
   scope               = left right local
   mp                  = NAME
   height              = DIMENSION
   depth              = DIMENSION
   distance            = DIMENSION
   threshold           = DIMENSION
   rulethickness       = DIMENSION
   before              = COMMAND
   after               = COMMAND
   color               = COLOR
   textstyle           = STYLE COMMAND
   textcolor           = COLOR
   align               = inherits: \setupalign
```

`\setuplinefillers [...,1...] [...,2...,...]`

```
1  NAME                OPT
2  inherits: \setuplinefiller
```

`\setuplinenote [...,1...] [...,2...,...]`

```
1  NAME                OPT
2  compress             = yes no
   compressmethod       = separator stopper space
   compressseparator    = COMMAND
   compressdistance     = DIMENSION
   inherits: \setupnote
```

`\setuplinenumbering [...,1...] [...,2...,...]`

```
1  NAME                OPT
2  start               = NUMBER
   step               = NUMBER
   method             = page first next
   conversion         = NAME
   continue           = yes no
   location           = text begin end default left right inner outer inleft inright margin inmargin
   distance           = DIMENSION
   align              = inner outer flushleft flushright left right middle auto
   command            = \...##1
   left               = COMMAND
   right              = COMMAND
   margin             = DIMENSION
   width              = margin DIMENSION
   style              = STYLE COMMAND
   color              = COLOR
```

`\setuplines [...,1...] [...,2...,...]`

```
1  NAME                OPT
2  option             = packed
   before            = COMMAND
   after             = COMMAND
   inbetween         = COMMAND
   indenting         = inherits: \setupindenting
   align             = inherits: \setupalign
   space            = yes on off fixed default
   command           = COMMAND
   style            = STYLE COMMAND
   color            = COLOR
   left            = COMMAND
   right           = COMMAND
```

```
\setuplinetable [1...] [2...] [3...,...=...,...]
```

```
1  r c          OPT      OPT
2  odd even header NUMBER
3  lines        = fit NUMBER
   before       = COMMAND
   after        = COMMAND
   inbetween    = COMMAND
   stretch     = yes no DIMENSION
   maxwidth     = fit DIMENSION
   nleft       = NUMBER
   n            = NUMBER
   repeat       = yes no
   nx          = NUMBER
   width        = DIMENSION
   height       = fit line DIMENSION
   distance     = DIMENSION
   leftoffset   = DIMENSION
   rightoffset  = DIMENSION
   align        = inherits: \setupalign
   background   = color
   backgroundcolor = COLOR
   xheight      = max DIMENSION
   xdepth       = max DIMENSION
   style        = STYLE COMMAND
   color        = COLOR
```

```
\setuplinewidth [...]
```

```
*   small medium big DIMENSION
```

```

\setuplist [...1,...] [...2,...]
1  LIST                                OPT
2  state                             = start stop
   location                         = none here
   type                             = simple command userdata
   criterium                        = local intro reference SECTIONBLOCK:reference all SECTIONBLOCK:all text SECTIONBLOCK:text
                                   current SECTIONBLOCK:current here previous SECTIONBLOCK:previous component SECTION
                                   SECTIONBLOCK:SECTION
   list                             = NAME
   width                            = fit broad DIMENSION
   height                           = fit broad DIMENSION
   depth                            = fit broad DIMENSION
   symbol                            = one two three none default
   label                            = yes no none NAME
   starter                           = COMMAND
   stopper                           = COMMAND
   command                          = \...##1##2##3
   numbercommand                    = \...##1
   textcommand                      = \...##1
   pagecommand                      = \...##1
   pagenumber                       = yes no always
   headnumber                       = yes no always
   before                           = COMMAND
   after                             = COMMAND
   inbetween                         = COMMAND
   margin                           = none DIMENSION
   distance                         = none DIMENSION
   aligntitle                       = yes no
   numberalign                      = left right middle flushleft flushright inner outer
   align                             = inherits: \setupalign
   hang                             = yes no
   left                             = COMMAND
   right                             = COMMAND
   interaction                      = yes no all number text title page sectionnumber pagenumber
   limittext                        = yes no TEXT
   style                             = STYLE COMMAND
   color                             = COLOR
   numberstyle                      = STYLE COMMAND
   numbercolor                     = COLOR
   textstyle                        = STYLE COMMAND
   textcolor                        = COLOR
   pagestyle                        = STYLE COMMAND
   pagecolor                        = COLOR
   reference                        = NUMBER
   extras                            = NAME
   order                             = command all title
   alternative                      = a b c d e f g left right top bottom command none interactive paragraph horizontal
                                   vertical NAME
   maxwidth                         = DIMENSION
   pageprefix                       = yes no
   pageprefixseparatorset           = NAME
   pageprefixconversionset          = NAME
   pageprefixset                    = NAME
   pageprefixsegments              = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:all SECTION SECTION:SECTION SECTION:* SECTION:all
                                   current
   pageprefixconnector              = COMMAND PROCESSOR->COMMAND
   pageconversionset                = NAME
   pagestarter                      = COMMAND PROCESSOR->COMMAND
   pagestopper                      = COMMAND PROCESSOR->COMMAND
   inherits: \setupcounterinherits: \setupframed

```

```

\setuplistalternative [...1,...] [...2,...]
1  NAME                                OPT
2  before                             = COMMAND
   after                             = COMMAND
   command                            = \...##1##2##3
   renderingsetup                     = NAME
   width                              = DIMENSION
   distance                           = DIMENSION
   stretch                           = DIMENSION
   filler                             = COMMAND

```

```

\setuplistextra [...1,...] [...2,...]
1  NAME                                OPT
2  before = COMMAND
   after  = COMMAND

```

`\setuplocalfloats [...,.*=...,...]`

\* before = COMMAND  
after = COMMAND  
inbetween = COMMAND

`\setuplocalinterlinespace [...,1...] [...,..2...,...]`

1 NAME OPT  
2 inherits: \setupinterlinespace

`\setuplocalinterlinespace [...,*,...]`

\* on off reset auto small medium big NUMBER DIMENSION

`\setuplocalinterlinespace [...*...]`

\* NAME

`\setuplow [...,1...] [...,..2...,...]`

1 NAME OPT  
2 distance = DIMENSION  
down = DIMENSION  
style = STYLE COMMAND  
color = COLOR

`\setuplowhigh [...,1...] [...,..2...,...]`

1 NAME OPT  
2 distance = DIMENSION  
up = DIMENSION  
down = DIMENSION  
style = STYLE COMMAND  
color = COLOR

`\setuplowmidhigh [...,1...] [...,..2...,...]`

1 NAME OPT  
2 up = DIMENSION  
down = DIMENSION  
style = STYLE COMMAND  
color = COLOR

`\setupMPgraphics [...,.*=...,...]`

\* color = local global  
mpy = FILE

`\setupMPinstance [...,1...] [...,..2...,...]`

1 NAME OPT  
2 format = metafun mpost  
initializations = yes no  
setups = NAME  
textstyle = STYLE COMMAND  
textcolor = COLOR  
extensions = yes no  
method = binary decimal double scaled default

`\setupMPpage [...,.*=...,...]`

\* inherits: \setupfittingpage

`\setupMPvariables [...,1...] [...,..2...,...]`

1 NAME OPT  
2 KEY = VALUE

`\setupmakeup [...1,...] [...2...,...]`

```
1 NAME OPT
2 page = inherits: \page
  command = COMMAND
  width = DIMENSION
  height = DIMENSION
  align = inherits: \setupalign
  setups = NAME
  top = COMMAND
  bottom = COMMAND
  before = COMMAND
  after = COMMAND
  location = top
  reference = REFERENCE
  pagestate = start stop
  headerstate = start stop high empty none normal
  footerstate = start stop high empty none normal
  topstate = start stop high empty none normal
  bottomstate = start stop high empty none normal
  textstate = start stop high empty none normal
  doublesided = yes no empty
  style = STYLE COMMAND
  color = COLOR
```

`\setupmarginblock [...1,...] [...2...,...]`

```
1 NAME OPT
2 state = start stop
  width = DIMENSION
  before = COMMAND
  after = COMMAND
  inbetween = COMMAND
  align = inherits: \setupalign
  style = STYLE COMMAND
  color = COLOR
  top = COMMAND
  bottom = COMMAND
  location = left right middle inmargin
  left = COMMAND
  right = COMMAND
```

`\setupmargindata [...1,...] [...2...,...]`

```
1 NAME OPT
2 strut = yes no auto cap fit line default CHARACTER
  command = \...##1
  width = DIMENSION
  align = inherits: \setupalign
  anchor = region text
  location = left right inner outer
  method = top line first depth height
  category = default edge
  scope = local global
  option = text paragraph
  margin = local normal margin edge
  distance = DIMENSION
  hoffset = DIMENSION
  voffset = DIMENSION
  dy = DIMENSION
  bottomspace = DIMENSION
  threshold = DIMENSION
  line = NUMBER
  stack = yes continue
  style = STYLE COMMAND
  color = COLOR
```

`\setupmarginframed [...1,...] [...2...,...]`

```
1 NAME OPT
2 inherits: \setupframed
```

`\setupmarginrule [1...] [...2...,...]`

```
1 NUMBER OPT
2 inherits: \setupsidebar
```

`\setupmarginrules [...1] [...2...]`

1    NUMBER                    OPT  
2    inherits: \setupmarginrule

`\setupmarking [...1...] [...2...]`

1    MARK                    OPT  
2    state            = start stop  
    expansion        = yes no  
    separator        = COMMAND  
    filtercommand    = \...##1

`\setupmathalignment [...1...] [...2...]`

1    NAME                    OPT  
2    n                = NUMBER  
    m                = NUMBER  
    distance        = DIMENSION  
    number          = auto  
    separator       = TEXT  
    align           = left middle right normal  
    location        = top center bottom normal  
    grid            = math no

`\setupmathcases [...1...] [...2...]`

1    NAME                    OPT  
2    left                = COMMAND  
    right               = COMMAND  
    strut                = yes no  
    style                = STYLE COMMAND  
    distance            = DIMENSION  
    numberdistance    = DIMENSION

`\setupmathematics [...1...] [...2...]`

1    NAME                    OPT  
2    openup                = yes no  
    symbolset            = NAME  
    functionstyle        = STYLE COMMAND  
    compact              = yes no  
    align                = l2r r2l righttoleft  
    bidi                 = yes no  
    sygreek              = normal italic none  
    lcgreek              = normal italic none  
    ucgreek              = normal italic none  
    italics              = 1 2 3 4 none reset  
    autopunctuation    = yes no all comma yes,semicolon comma,semicolon all,semicolon  
    setups               = NAME  
    domain              = NAME reset  
    textstyle            = STYLE COMMAND  
    textcolor            = COLOR  
    functioncolor       = COLOR  
    integral            = limits nolimits autolimits displaylimits none  
    stylealternative    = NAME  
    default             = normal italic  
    fraction            = ams ctx  
    ampersand            = normal  
    collapsing          = 1 2 3 none reset  
    kernpairs            = yes no

`\setupmathfence [...1...] [...2...]`

1    NAME                    OPT  
2    command            = yes no  
    left                = NUMBER  
    middle              = NUMBER  
    right               = NUMBER  
    mathstyle          = display text script scriptscript cramped uncramped normal packed small big  
    color               = COLOR  
    state               = auto  
    method              = auto  
    size                = NUMBER  
    factor              = none auto NUMBER  
    mathclass          = NUMBER

```

\setupmathfraction [...1,...] [...2==...,...]
1 NAME OPT
2 topdistance = DIMENSION
  bottomdistance = DIMENSION
  margin = DIMENSION
  color = COLOR
  strut = yes no math tight
  alternative = inner outer both
  rule = yes no auto
  left = NUMBER
  right = NUMBER
  rulethickness = DIMENSION
  mathstyle = STYLE COMMAND
  distance = no none overlay
  inlinethreshold = auto NUMBER
  displaythreshold = auto NUMBER
  fences = NAME

```

```

\setupmathfractions [...1,...] [...2==...,...]
1 NAME OPT
2 inherits: \setupmathfraction

```

```

\setupmathframed [...1,...] [...2==...,...]
1 NAME OPT
2 inherits: \setupframed

```

```

\setupmathmatrix [...1,...] [...2==...,...]
1 NAME OPT
2 left = COMMAND
  right = COMMAND
  strut = yes no NUMBER
  align = left middle right normal
  style = STYLE COMMAND
  distance = DIMENSION
  simplecommand = TEXT
  location = top bottom high low lohi normal

```

```

\setupmathornament [...1,...] [...2==...,...]
1 NAME OPT
2 alternative = mp
  color = COLOR
  mpoffset = DIMENSION
  mp = NAME

```

```

\setupmathradical [...1,...] [...2==...,...]
1 NAME OPT
2 alternative = default normal mp
  color = COLOR
  mpoffset = DIMENSION
  mp = NAME

```

`\setupmathstackers [...1,...] [...2,...]`

```

1  NAME                      OPT
2  left                      = COMMAND
   right                     = COMMAND
   topcommand                = \...##1
   bottomcommand             = \...##1
   middlecommand             = \...##1
   mp                        = NAME
   mpheight                  = DIMENSION
   mpdepth                   = DIMENSION
   mpoffset                  = DIMENSION
   color                     = COLOR
   hoffset                   = DIMENSION
   voffset                   = DIMENSION
   minheight                 = DIMENSION
   mindepth                  = DIMENSION
   mathclass                 = rel ord
   offset                    = min max normal
   location                  = top bottom high low middle NUMBER
   strut                     = yes no
   alternative                = normal default mp
   minwidth                  = DIMENSION
   distance                  = DIMENSION
   moffset                   = DIMENSION
   order                     = normal reverse
   mathlimits                = yes no

```

`\setupmathstyle [...*,...]`

\* display text script scriptscript cramped uncramped normal packed small big NAME

`\setupmixedcolumns [...1,...] [...2,...]`

```

1  NAME                      OPT
2  grid                      = inherits: \definegridsnapping
   rulethickness             = DIMENSION
   method                   = otr box
   before                   = COMMAND
   after                    = COMMAND
   distance                  = DIMENSION
   n                         = NUMBER
   maxheight                 = DIMENSION
   maxwidth                  = DIMENSION
   step                     = DIMENSION
   profile                   = NAME
   align                    = inherits: \setupalign
   setups                   = NAME
   balance                   = yes no
   splitmethod               = none fixed
   alternative               = local global
   internalgrid              = line halfline
   separator                 = rule
   strut                     = yes no
   color                     = COLOR
   rulecolor                 = COLOR
   direction                 = normal reverse
   inherits: \setupframed

```

`\setupmodule [...1] [...2,...]`

```

1  FILE                      OPT
2  test                     = yes no
   KEY                      = VALUE

```

`\setupnarrower [...1,...] [...2,...]`

```

1  NAME                      OPT
2  left                     = DIMENSION
   middle                   = DIMENSION
   right                    = DIMENSION
   default                  = [-+]left [-+]middle [-+]right NUMBER*left NUMBER*middle NUMBER*right reset
   before                   = COMMAND
   after                    = COMMAND

```



```

\setupnotation [...1,...] [...2,...]
1  NAME                OPT
2  title                = yes no
   number               = yes no
   type                 = note
   numbercommand        = \...##1
   titledistance        = DIMENSION
   titlestyle           = STYLE COMMAND
   titlecolor           = COLOR
   titlecommand         = \...##1
   titleleft            = COMMAND
   titleright           = COMMAND
   left                 = COMMAND
   right                = COMMAND
   symbol               = COMMAND
   starter              = COMMAND
   stopper              = COMMAND
   coupling              = NAME
   counter              = NAME
   level                = NUMBER
   text                 = TEXT
   headcommand          = \...##1
   before               = COMMAND
   after                = COMMAND
   inbetween            = COMMAND
   alternative           = left right inmargin inleft inright margin leftmargin rightmargin innermargin outermargin
                        serried hanging top command note NAME
   align                 = inherits: \setupalign
   headalign            = inherits: \setupalign
   indenting            = inherits: \setupindenting
   display              = yes no
   indentnext           = yes no auto
   width                = fit broad line DIMENSION
   distance              = none DIMENSION
   stretch             = NUMBER
   shrink               = NUMBER
   hang                 = fit broad none margin NUMBER
   closesymbol          = COMMAND
   closecommand         = \...##1
   expansion            = yes no xml
   referenceprefix      = + - TEXT
   sample               = TEXT
   margin               = yes no standard DIMENSION
   style                = STYLE COMMAND
   color                = COLOR
   headstyle            = STYLE COMMAND
   headcolor            = COLOR
   aligntitle           = yes no
   inherits: \setupcounter

```

```

\setupnotations [...1,...] [...2,...]
1  NAME                OPT
2  inherits: \setupnotation

```

```

\setupnote [...1,...] [...2,...]
1 NAME OPT
2 interaction = yes no number text all
symbolcommand = \...##1
textcommand = \...##1
indicator = yes no
textseparator = COMMAND
width = DIMENSION
height = DIMENSION
distance = DIMENSION
rulecommand = COMMAND
rule = on off normal left right command paragraph
split = tolerant strict verystrict NUMBER
factor = NUMBER
location = text page high bottom none columns firstcolumn lastcolumn
next = COMMAND
n = NUMBER
rulecolor = COLOR
rulethickness = DIMENSION
setups = NAME
interlinespace = NAME
paragraph = yes no
before = COMMAND
after = COMMAND
inbetween = COMMAND
scope = page
columndistance = DIMENSION
continue = yes no
alternative = grid fixed columns note none
criterium = page
bodyfont = inherits: \setupbodyfont
align = inherits: \setupalign
textstyle = STYLE COMMAND
textcolor = COLOR
anchor = next
spacebefore = inherits: \blank
spaceinbetween = inherits: \blank
inherits: \setupframed

```

```

\setupnotes [...1,...] [...2,...]
1 NAME OPT
2 inherits: \setupnote

```

```

\setupoffset [...*,...]
* inherits: \setupoffsetbox

```

```

\setupoffsetbox [...*,...]
* x = DIMENSION
y = DIMENSION
leftoffset = DIMENSION
rightoffset = DIMENSION
topoffset = DIMENSION
bottomoffset = DIMENSION
method = fixed
width = DIMENSION
height = DIMENSION
depth = DIMENSION
location = left middle right top bottom line l c r m t b g

```

```

\setupoppositeplacing [...*,...]
* state = start stop
before = COMMAND
after = COMMAND
inbetween = COMMAND

```

```

\setupoutputroutine [...1,...] [...2,...]
1 NAME OPT
2 KEY = CSNAME

```

```

\setupoutputroutine [...*,...]
* NAME

```

`\setuppagechecker [...1,...] [...2,...]`

1 NAME OPT  
2 lines = NUMBER  
offset = DIMENSION  
method = 0 1 2 3  
before = COMMAND  
after = COMMAND  
inbetween = COMMAND

`\setuppagecolumns [...1,...] [...2,...]`

1 NAME OPT  
2 separator = NAME  
direction = normal reverse  
distance = DIMENSION  
n = NUMBER  
maxwidth = DIMENSION  
align = inherits: \setupalign  
blank = inherits: \blank  
color = COLOR  
setups = NAME  
page = inherits: \page  
inherits: \setupframed

`\setuppagecomment [...*,...]`

\* location = left right top bottom none  
state = start stop none  
offset = DIMENSION  
distance = DIMENSION  
width = DIMENSION  
height = DIMENSION

`\setuppageinjection [...1,...] [...2,...]`

1 NAME OPT  
2 state = previous next NUMBER  
delay = yes no  
alternative = figure buffer setups none NAME  
page = inherits: \page  
pagestate = start stop  
n = NUMBER  
inherits: \setupframed

`\setuppageinjectionalternative [...1,...] [...2,...]`

1 NAME OPT  
2 renderingsetup = NAME

`\setuppagenumber [...*,...]`

\* inherits: \setupuserpagenumber

`\setuppagenumbering [...*,...]`

\* alternative = singlesided doublesided  
page = inherits: \page  
strut = yes no  
command = \...##1  
left = COMMAND  
right = COMMAND  
state = start stop  
width = DIMENSION  
location = header footer left middle right inleft inright margin inmargin atmargin marginedge  
style = STYLE COMMAND  
color = COLOR

`\setuppageshift [...1] [...2] [...3]`

1 page paper OPT OPT  
2 NAME  
3 NAME

`\setuppagestate [...1,...] [...2,...]`

1 NAME OPT  
2 delay = yes no

**\setuppagetransitions** [...]

\* **reset** auto start random NUMBER

**\setuppairedbox** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 before = COMMAND  
after = COMMAND  
inbetween = COMMAND  
location = left middle right top bottom high low  
n = NUMBER  
distance = DIMENSION  
bodyfont = inherits: \setupbodyfont  
width = DIMENSION  
height = DIMENSION  
maxwidth = DIMENSION  
maxheight = DIMENSION  
align = inherits: \setupalign  
style = STYLE COMMAND  
color = COLOR

**\setupPAIREDBOX** [...<sup>\*</sup>,...]

\* inherits: \setuppairedbox

instances: legend

**\setuplegend** [...<sup>\*</sup>,...]

\* inherits: \setuppairedbox

**\setuppalet** [...]

\* NAME

**\setuppaper** [...<sup>\*</sup>,...]

\* inherits: \setuppapersize

**\setuppapersize** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 top = COMMAND  
bottom = COMMAND  
left = COMMAND  
right = COMMAND  
method = normal none NAME  
scale = NUMBER  
nx = NUMBER  
ny = NUMBER  
dx = DIMENSION  
dy = DIMENSION  
width = DIMENSION  
height = DIMENSION  
topspace = DIMENSION  
backspace = DIMENSION  
offset = DIMENSION  
page = reset landscape mirrored negative rotated 90 180 270 NAME  
paper = reset landscape mirrored negative rotated 90 180 270 NAME  
option = fit max  
distance = DIMENSION

**\setuppapersize** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 reset landscape mirrored<sup>OPT</sup> negative rotated<sup>OPT</sup> 90 180 270 NAME  
2 reset landscape mirrored negative rotated 90 180 270 NAME

**\setupparagraph** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 NAME OPT  
2 style = STYLE COMMAND  
color = COLOR  
align = inherits: \setupalign  
setups = NAME

**\setupparagraphintro** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

1 reset each first next  
2 COMMAND

`\setupparagraphnumbering [...,..*...,...]`

\* state = start stop line reset  
distance = DIMENSION  
style = STYLE COMMAND  
color = COLOR

`\setupparagraphs [...1...] [...,2...] [...,3...,...]`

1 NAME OPT OPT  
2 each NUMBER  
3 n = NUMBER  
before = COMMAND  
after = COMMAND  
width = DIMENSION  
distance = DIMENSION  
height = DIMENSION fit  
top = COMMAND  
bottom = COMMAND  
align = inherits: \setupalign  
inner = COMMAND  
command = COMMAND  
rule = on off  
rulethickness = DIMENSION  
rulecolor = COLOR  
style = STYLE COMMAND  
color = COLOR

`\setupparagraphs [...1...] [...,2...,...]`

1 NAME:NUMBER OPT  
2 n = NUMBER  
before = COMMAND  
after = COMMAND  
width = DIMENSION  
distance = DIMENSION  
height = DIMENSION fit  
top = COMMAND  
bottom = COMMAND  
align = inherits: \setupalign  
inner = COMMAND  
command = COMMAND  
rule = on off  
rulethickness = DIMENSION  
rulecolor = COLOR  
style = STYLE COMMAND  
color = COLOR

`\setupparallel [...1] [...,2...] [...,3...,...]`

1 NAME  
2 NAME  
3 setups = NAME  
start = NUMBER  
n = NUMBER  
criterium = all

`\setupperiodkerning [...,1...] [...,2...,...]`

1 NAME OPT  
2 factor = NUMBER

`\setupperiods [...,*...,...]`

\* n = NUMBER  
width = DIMENSION fit  
distance = DIMENSION  
symbol = COMMAND

`\setupplacement [...,1...] [...,2...,...]`

1 NAME OPT  
2 before = COMMAND  
after = COMMAND  
left = COMMAND  
right = COMMAND  
grid = inherits: \snaptogrid  
linecorrection = on off  
depthcorrection = on off  
margin = yes no standard

**\setuppositionbar** [...,<sup>\*</sup>...]

\* style = STYLE COMMAND  
color = COLOR  
n = NUMBER  
min = NUMBER  
max = NUMBER  
text = TEXT  
width = DIMENSION  
height = DIMENSION  
depth = DIMENSION

**\setuppositioning** [...,<sup>1</sup>...] [...,<sup>2</sup>...]

1 NAME OPT  
2 offset = yes no  
unit = ex em pt in cm mm sp bp pc dd cc nc  
state = start overlay  
xoffset = DIMENSION  
yoffset = DIMENSION  
xstep = absolute relative  
ystep = absolute relative  
xscale = NUMBER  
yscale = NUMBER  
xfactor = NUMBER  
yfactor = NUMBER  
factor = NUMBER  
scale = NUMBER

**\setupprocessor** [...,<sup>1</sup>...] [...,<sup>2</sup>...]

1 NAME OPT  
2 state = start stop  
left = COMMAND  
right = COMMAND  
command = \...##1  
style = STYLE COMMAND  
color = COLOR

**\setupprofile** [...,<sup>1</sup>...] [...,<sup>2</sup>...]

1 NAME OPT  
2 height = DIMENSION  
depth = DIMENSION  
distance = DIMENSION  
factor = NUMBER  
lines = NUMBER  
method = strict fixed none

**\setupprograms** [...,<sup>\*</sup>...]

\* style = STYLE COMMAND  
color = COLOR

**\setupquotation** [...,<sup>\*</sup>...]

\* inherits: \setupdelimitedtext

**\setupquote** [...,<sup>\*</sup>...]

\* inherits: \setupdelimitedtext

**\setuprealpagenumber** [...,<sup>\*</sup>...]

\* inherits: \setupcounter

**\setupreferenceformat** [...,<sup>1</sup>...] [...,<sup>2</sup>...]

1 NAME OPT  
2 label = \* NAME  
left = COMMAND  
right = COMMAND  
type = default text title number page realpage  
setups = NAME  
autocase = yes no  
text = TEXT  
style = STYLE COMMAND  
color = COLOR

```
\setupreferenceprefix [...]
```

```
* + - TEXT
```

```
\setupreferencestructureprefix [...1] [...2] [...,3...,...]
```

```
1 NAME SECTION          OPT      OPT
2 default
3 prefix                 = yes no
  prefixseparatorset    = NAME
  prefixconversion      = NAME
  prefixconversionset   = NAME
  prefixstarter         = COMMAND PROCESSOR->COMMAND
  prefixstopper         = COMMAND PROCESSOR->COMMAND
  prefixset             = NAME
  prefixsegments       = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:all SECTION SECTION:SECTION SECTION:* SECTION:all
                        current
  numberconversion      = NAME
  numberconversionset   = NAME
  numberstarter         = COMMAND PROCESSOR->COMMAND
  numberstopper         = COMMAND PROCESSOR->COMMAND
  numbersegments       = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:all
  numberseparatorset    = NAME
  prefixconnector       = COMMAND PROCESSOR->COMMAND
```

```
\setuppreferencing [...,*...,...]
```

```
* state                 = start stop
  expansion              = yes no xml
  autofile               = yes no
  export                 = yes no
  left                   = COMMAND
  right                  = COMMAND
  width                  = DIMENSION
  doublesided            = yes no
  interaction            = label text symbol all
  separator              = COMMAND
  prefix                 = + - TEXT
```

\setupregister [...]<sup>1</sup> [...,...]<sup>2</sup> [...,...]

```

1 NAME NAME:NUMBER OPT
2 referencemethod = forward
  expansion = yes no xml
  ownnumber = yes no
  xmlsetup = NAME
  alternative = a b A B
  method = default before after first last ch mm zm pm mc zc pc uc
  compress = yes no all
  check = yes no
  criterium = local text current previous all SECTION
  pageprefixseparatorset = COMMAND
  pageprefixconversionset = NAME
  pageprefixstarter = COMMAND PROCESSOR->COMMAND
  pageprefixstopper = COMMAND PROCESSOR->COMMAND
  pageprefixset = NAME
  pageprefixsegments = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:all SECTION SECTION:SECTION SECTION:* SECTION:all
                        current
  pageprefixconnector = COMMAND
  pageprefix = yes no
  pageseparatorset = NAME
  pageconversionset = NAME
  pagestarter = COMMAND PROCESSOR->COMMAND
  pagestopper = COMMAND PROCESSOR->COMMAND
  pagesegments = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:all
  maxwidth = DIMENSION
  indicator = yes no
  before = COMMAND
  after = COMMAND
  command = \...##1
  textcommand = \...##1
  deeptextcommand = \...##1
  pagecommand = \...##1
  distance = DIMENSION
  interaction = text pagenumber
  pagenumber = yes no
  symbol = a n none 1 2 COMMAND
  language = default DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scn LANGUAGE
  style = STYLE COMMAND
  color = COLOR
  textstyle = STYLE COMMAND
  textcolor = COLOR
  pagestyle = STYLE COMMAND
  pagecolor = COLOR
  pageleft = COMMAND
  pageright = COMMAND
  n = NUMBER
  balance = yes no
  align = inherits: \setupalign
  numberorder = numbers

```

\setupregisters [...]<sup>1</sup> [...,...]<sup>2</sup> [...,...]

```

1 NAME NAME:NUMBER OPT
2 inherits: \setupregister

```

\setupregisters [...]<sup>1</sup> [...,...]<sup>2</sup> [...,...]<sup>3</sup> [...,...]

```

1 NAME OPT OPT
2 NUMBER
3 inherits: \setupregister

```



**\setupregister** [...<sup>1</sup>,...] [...<sup>2</sup>,...] [...<sup>3</sup>,...]

```
1 NAME OPT OPT
2 NUMBER
3 referencemethod = forward
  expansion = yes no xml
  ownnumber = yes no
  xmlsetup = NAME
  alternative = a b A B
  method = default before after first last ch mm zm pm mc zc pc uc
  compress = yes no all packed
  check = yes no
  criterium = local text current previous all SECTION
  pageprefixseparatorset = COMMAND
  pageprefixconversionset = NAME
  pageprefixstarter = COMMAND PROCESSOR->COMMAND
  pageprefixstopper = COMMAND PROCESSOR->COMMAND
  pageprefixset = NAME
  pageprefixsegments = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:all SECTION SECTION:SECTION SECTION:* SECTION:all
    current
  pageprefixconnector = COMMAND
  pageprefix = yes no
  pageseparatorset = NAME
  pageconversionset = NAME
  pagestarter = COMMAND PROCESSOR->COMMAND
  pagestopper = COMMAND PROCESSOR->COMMAND
  pagesegments = NUMBER NUMBER:NUMBER NUMBER:* NUMBER:all
  maxwidth = DIMENSION
  indicator = yes no
  before = COMMAND
  after = COMMAND
  command = \...##1
  textcommand = \...##1
  deeptextcommand = \...##1
  pagecommand = \...##1
  distance = DIMENSION
  interaction = text pagenumber
  pagenumber = yes no
  symbol = a n none 1 2 COMMAND
  language = default DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scn LANGUAGE
  style = STYLE COMMAND
  color = COLOR
  textstyle = STYLE COMMAND
  textcolor = COLOR
  pagestyle = STYLE COMMAND
  pagecolor = COLOR
  pageleft = COMMAND
  pageright = COMMAND
  n = NUMBER
  balance = yes no
  align = inherits: \setupalign
  numberorder = numbers
```

**\setupREGISTER** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```
1 NUMBER OPT
2 inherits: \setupregister
instances: index
```

**\setupindex** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```
1 NUMBER OPT
2 inherits: \setupregister
```

**\setuprenderingwindow** [...<sup>1</sup>,...] [...<sup>2</sup>,...]

```
1 NAME OPT
2 openpageaction = REFERENCE
  closepageaction = REFERENCE
  inherits: \setupframed
```

**\setuprotate** [...<sup>\*</sup>,...]

```
* location = fit broad depth high middle default normal
  rotation = left right inner outer NUMBER
  inherits: \setupframed
```

```

\setupruby [...1,...] [...2,...]
1  NAME          OPT
2  location      = top left right
    align        = auto flushleft middle flushright
    stretch     = yes no
    hoffset      = DIMENSION
    voffset      = DIMENSION
    distance     = none DIMENSION
    left         = COMMAND
    right        = COMMAND
    style        = STYLE COMMAND
    color        = COLOR

```

```

\setups [...*,...]
*  NAME

```

```

\setupscale [...1,...] [...2,...]
1  NAME          OPT
2  scale          = NUMBER
    xscale        = NUMBER
    yscale        = NUMBER
    width         = DIMENSION
    height        = DIMENSION
    depth         = yes no
    lines         = NUMBER
    factor        = fit broad max min auto default
    hfactor       = fit broad max min auto default
    wfactor       = fit broad max min auto default
    maxwidth      = DIMENSION
    maxheight     = DIMENSION
    s             = NUMBER
    sx            = NUMBER
    sy            = NUMBER
    equalwidth    = DIMENSION
    equalheight   = DIMENSION
    grid          = yes fit height depth halflines

```

```

\setupscript [...1,...] [...2,...]
1  NAME          OPT
2  method        = hangul hanzi nihongo ethiopic thai test
    preset       = NAME
    features     = auto

```

```

\setupscripts [...1,...] [...2,...]
1  NAME          OPT
2  inherits: \setupscript

```

```

\setupsectionblock [...1,...] [...2,...]
1  NAME          OPT
2  page          = inherits: \page
    before       = COMMAND
    after        = COMMAND
    number       = yes no

```

```

\setupselector [...1,...] [...2,...]
1  NAME
2  n             = NUMBER
    m            = NUMBER

```

```

\setupshift [...1,...] [...2,...]
1  NAME          OPT
2  continue      = yes no
    unit         = ex em pt in cm mm sp bp pc dd cc nc
    method       = NUMBER
    dy           = NUMBER
    align        = inherits: \setupalign
    style        = STYLE COMMAND
    color        = COLOR

```

`\setupsidebar [...1,...] [...2,...]`

1 NAME OPT  
2 rulethickness = DIMENSION  
rulecolor = COLOR  
alternative = NUMBER  
topoffset = DIMENSION  
bottomoffset = DIMENSION  
distance = DIMENSION  
leftmargindistance = DIMENSION  
level = NUMBER

`\setupsorting [...1,...] [...2,...]`

1 SINGULAR OPT  
2 expansion = yes no xml  
alternative = first last normal NAME  
next = COMMAND  
command = \...##1##2##3  
textcommand = \...##1  
synonymcommand = \...##1  
language = default DIN\_5007-1 DIN\_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scن LANGUAGE  
method = default before after first last ch mm zm pm mc zc pc uc  
criterion = current previous local text all SECTION  
style = STYLE COMMAND  
color = COLOR  
textstyle = STYLE COMMAND  
textcolor = COLOR  
synonymstyle = STYLE COMMAND  
synonymcolor = COLOR

`\setupspacing [...]`

\* fixed packed broad<sup>OPT</sup>

`\setupspellchecking [...*,...]`

\* state = start stop  
method = 1 2 3  
list = NAME

`\setupstartstop [...1,...] [...2,...]`

1 NAME OPT  
2 before = COMMAND  
after = COMMAND  
inbetween = COMMAND  
setups = NAME  
left = COMMAND  
right = COMMAND  
style = STYLE COMMAND  
color = COLOR

`\setupstretched [...*,...]`

\* inherits: \setupcharacterkerning

`\setupstruts [...]`

\* yes no auto cap<sup>OPT</sup> fit line default CHARACTER

`\setupstyle [...1,...] [...2,...]`

1 NAME OPT  
2 method = command  
style = STYLE COMMAND  
color = COLOR

`\setupsubformula [...1,...] [...2,...]`

1 NAME OPT  
2 indentnext = yes no auto

`\setupsubformulas [...1,...] [...2,...]`

1 NAME OPT  
2 inherits: \setupsubformula

```
\setupsubpagenumber [...,*...,...]
* inherits: \setupcounter
```

```
\setupsymbolset [...]
* NAME
```

```
\setupsynctex [...,*...,...]
* state = start stop
method = min max
```

```
\setupsynonyms [...,1...] [...,2...,...]
1 SINGULAR OPT
2 expansion = yes no xml
alternative = first last normal NAME
next = COMMAND
command = \...##1##2##3
textcommand = \...##1
synonymcommand = \...##1
language = default DIN_5007-1 DIN_5007-2 Duden de-DE de-CH de-AT ru-iso9 ocs-scN LANGUAGE
method = default before after first last ch mm zm pm mc zc pc uc
criterion = current previous local text all SECTION
style = STYLE COMMAND
color = COLOR
textstyle = STYLE COMMAND
textcolor = COLOR
synonymstyle = STYLE COMMAND
synonymcolor = COLOR
```

```
\setups {...,*...}
* NAME
```

```
\setupTABLE [...,1...] [...,2...] [...,3...,...]
1 r c x y row columnT first last0 start header each odd even one NUMBER -NUMBER
2 first least each two odd even NUMBER -NUMBER
3 extras = COMMAND
left = COMMAND
right = COMMAND
headcolor = COLOR
headstyle = STYLE COMMAND
leftmargindistance = DIMENSION
rightmargindistance = DIMENSION
columndistance = DIMENSION
maxwidth = DIMENSION
setups = NAME
textwidth = DIMENSION local
split = yes no repeat auto
header = repeat
option = stretch tight
before = COMMAND
after = COMMAND
samepage = before after both
spaceinbetween = inherits: \blank
splitoffset = DIMENSION
aligncharacter = yes no
alignmentcharacter = TEXT number->TEXT text->TEXT
distance = DIMENSION
color = COLOR
style = math STYLE COMMAND
inherits: \setupframed
```

```
\setupTEXpage [...,*...,...]
* inherits: \setupfittingpage
```

`\setuptables [...,*...]`

```
* text      = DIMENSION max
  split     = yes no repeat auto
  frame     = on off
  NL        = inherits: \blank
  VL        = small medium big none NUMBER
  HL        = small medium big none NUMBER
  distance  = small medium big none
  align     = left middle right
  commands  = COMMAND
  bodyfont  = inherits: \setupbodyfont
  rulethickness = DIMENSION
  height    = strut NUMBER
  depth     = strut NUMBER
  openup    = DIMENSION
```

`\setuptabulate [...]1 [...]2 [...,*...]3`

```
1 NAME      OPT      OPT
2 NAME
3 inherits: \setuptabulation
```

`\setuptabulation [...]1 [...,*...]2`

```
1 NAME      OPT
2 format    = TEMPLATE none
  before    = COMMAND
  after     = COMMAND
  distance  = small medium big none blank depth grid DIMENSION
  blank     = preference samepage max force enable disable nowhite packed back overlay always weak strong
              default before inbetween after fixed flexible none small medium big line halfline quarterline
              formula white height depth standard NUMBER*small NUMBER*medium NUMBER*big NUMBER*line NUMBER*halfline
              NUMBER*quarterline NUMBER*formula NUMBER*white NUMBER*height NUMBER*depth category:NUMBER
              order:NUMBER penalty:NUMBER DIMENSION NAME
  headstyle = STYLE COMMAND
  headcolor = COLOR
  background = NAME
  backgroundcolor = COLOR
  foregroundstyle = STYLE COMMAND
  foregroundcolor = COLOR
  align      = left middle right dimension
  rule       = line normal
  rulecolor  = COLOR
  rulethickness = DIMENSION
  bodyfont   = inherits: \setupbodyfont
  indenting  = yes no
  split      = yes no repeat auto
  unit       = DIMENSION
  margin     = DIMENSION
  inner      = COMMAND
  EQ         = COMMAND
  header     = yes repeat text
  frame      = on off
  title      = TEXT
  kepttogether = yes no
```

`\setuptagging [...,*...]`

```
* state = start stop
  method = auto
```

`\setuptext [...]1 [...,*...]2`

```
1 text margin edge
2 inherits: \setuplayouttext
```

**\setuptextbackground** [ $\dots^1, \dots$ ] [ $\dots, \dots^2, \dots$ ]

```

1  NAME                      OPT
2  state                     = start stop
   location                  = text paragraph always none
   criterium                 = NUMBER
   alternative               = NUMBER
   mp                       = NAME
   method                   = NAME
   background               = color
   backgroundcolor          = COLOR
   corner                   = rectangular round
   level                    = NUMBER
   backgroundoffset         = DIMENSION
   before                   = COMMAND
   after                    = COMMAND
   align                    = inherits: \setupalign
   dash                     = NUMBER
   radius                   = DIMENSION
   frame                    = on off
   framecolor               = COLOR
   rulethickness            = DIMENSION
   voffset                  = DIMENSION
   frameoffset              = DIMENSION
   leftoffset               = yes no standard DIMENSION
   rightoffset              = yes no standard DIMENSION
   topoffset                = small medium big line DIMENSION
   bottomoffset             = small medium big line DIMENSION
   style                    = STYLE COMMAND
   color                    = COLOR

```

**\setuptextflow** [ $\dots^1, \dots$ ] [ $\dots, \dots^2, \dots$ ]

```

1  NAME                      OPT
2  width                     = DIMENSION
   style                    = STYLE COMMAND
   color                    = COLOR

```

**\setuptextrules** [ $\dots, \dots^*, \dots$ ]

```

*  before                   = COMMAND
   after                    = COMMAND
   inbetween                = COMMAND
   rulethickness            = DIMENSION
   location                 = left inmargin
   style                    = STYLE COMMAND
   color                   = COLOR
   rulecolor                = COLOR
   width                   = DIMENSION
   height                  = DIMENSION
   distance                 = DIMENSION
   depthcorrection         = on off
   bodyfont                 = inherits: \setupbodyfont

```

**\setuptexttexts** [ $\dots^1$ ] [ $\dots^2$ ] [ $\dots^3$ ] [ $\dots^4$ ] [ $\dots^5$ ]

```

1  text margin edge      OPT      OPT      OPT      OPT      OPT
2  date pagenumber MARK TEXT COMMAND
3  date pagenumber MARK TEXT COMMAND
4  date pagenumber MARK TEXT COMMAND
5  date pagenumber MARK TEXT COMMAND

```

**\setupthinrules** [ $\dots, \dots^*, \dots$ ]

```

*  height                   = max DIMENSION
   depth                   = max DIMENSION
   background              = color
   frame                   = on off
   rulethickness           = DIMENSION
   alternative              = a b c none
   backgroundcolor         = COLOR
   color                   = COLOR
   interlinespace          = small medium big NUMBER
   before                  = COMMAND
   after                   = COMMAND
   inbetween               = COMMAND
   n                       = NUMBER

```

```
\setuptolerance [...]
* horizontal vertical verystRICT strict tolerant verytolerant space stretch
```

```
\setuptooltip [...] [...]
1 NAME OPT
2 location = left middle right
inherits: \setupframed
```

```
\setuptop [...] [...]
1 text marginOPTedge
2 inherits: \setuplayouttext
```

```
\setuptotexts [...] [...] [...] [...] [...]
1 text margin edge OPT OPT OPT OPT OPT
2 date pagenumber MARK TEXT COMMAND
3 date pagenumber MARK TEXT COMMAND
4 date pagenumber MARK TEXT COMMAND
5 date pagenumber MARK TEXT COMMAND
```

```
\setuptype [...] [...]
1 NAME OPT
2 option = mp lua xml parsed-xml nested tex context none NAME
command = CSNAME
left = COMMAND
right = COMMAND
tab = yes no NUMBER
compact = absolute last all
escape = yes no TEXT PROCESSOR->TEXT
style = STYLE COMMAND
color = COLOR
lines = yes no normal hyphenated
space = on off normal fixed stretch
```

```
\setuptyping [...] [...]
1 NAME OPT
2 oddmargin = DIMENSION
evenmargin = DIMENSION
margin = yes no standard DIMENSION
option = mp lua xml parsed-xml nested tex context none NAME
style = STYLE COMMAND
color = COLOR
align = inherits: \setupalign
lines = yes no normal hyphenated
space = on off normal fixed stretch
keeptogether = yes no
before = COMMAND
after = COMMAND
strip = yes no NUMBER
range = NUMBER NAME
tab = yes no NUMBER
escape = yes no TEXT PROCESSOR->TEXT
indentnext = yes no auto
continue = yes no
start = NUMBER
stop = NUMBER
step = NUMBER
numbering = file line no
blank = inherits: \blank
```

```
\setupunit [...] [...]
1 NAME OPT
2 method = 1 2 3 4 5 6
language = LANGUAGE
alternative = text mathematics
order = reverse normal
separator = small medium big normal none NAME
space = small medium big normal none NAME
style = STYLE COMMAND
color = COLOR
```

`\setupurl [...,*...]`

\* style = STYLE COMMAND  
color = COLOR

`\setupuserpagenumber [...,*...]`

\* viewerprefix = TEXT  
state = start stop none keep empty  
inherits: \setupcounter

`\setupversion [...]`

\* concept file temporary final NAME

`\setupviewerlayer [...,*...]`

\* title = TEXT  
state = start stop  
export = yes no  
printable = yes no  
scope = local global  
method = none command

`\setupvspacing [...,*...]`

\* inherits: \vspacing <sup>OPT</sup>

`\setupwhitespace [...,*...]`

\* fix fixed flexible line<sup>OPT</sup> halfline quarterline none small medium big default DIMENSION

`\setupwithargument {...} {...}`

1 NAME  
2 CONTENT

`\setupwithargumentswapped {...} {...}`

1 CONTENT  
2 NAME

`\setupxml [...,*...]`

\* default = hidden none text  
compress = yes no

`\setupxtable [...,1...] [...,2...]`

1 NAME <sup>OPT</sup>  
2 textwidth = DIMENSION local  
bodyfont = inherits: \setupbodyfont  
spaceinbetween = inherits: \blank  
option = tight max stretch width height fixed  
textheight = DIMENSION  
maxwidth = DIMENSION  
columndistance = DIMENSION  
leftmargindistance = DIMENSION  
rightmargindistance = DIMENSION  
header = repeat  
footer = repeat  
rulethickness = DIMENSION  
split = yes no repeat auto  
splitoffset = DIMENSION  
samepage = before after both  
distance = DIMENSION  
aligncharacter = yes no  
alignmentleftsample = TEXT  
alignmentrightsample = TEXT  
alignmentleftwidth = DIMENSION  
alignmentrightwidth = DIMENSION  
alignmentcharacter = TEXT  
inherits: \setupframed

`\setup {...}`

\* NAME



**\setuvalue** {...} {...}

- 1 NAME
- 2 CONTENT

**\setuxvalue** {...} {...}

- 1 NAME
- 2 CONTENT

**\setvalue** {...} {...}

- 1 NAME
- 2 CONTENT

**\setvariable** {...} {...} {...}

- 1 NAME
- 2 KEY
- 3 VALUE

**\setvariables** [...]<sup>1</sup> [...,...<sup>2</sup>...]

- 1 NAME
- 2 **set** = COMMAND  
**reset** = COMMAND  
KEY = VALUE

**\setvboxregister** ...<sup>1</sup> {...}

- 1 CSNAME NUMBER
- 2 CONTENT

**\setvisualizerfont** [...]<sup>\*</sup>

- \* FONT OPT

**\setvtopregister** ...<sup>1</sup> {...}

- 1 CSNAME NUMBER
- 2 CONTENT

**\setwidthof** ...<sup>1</sup> \to ...<sup>2</sup>

- 1 TEXT
- 2 CSNAME

**\setxmeasure** {...} {...}

- 1 NAME
- 2 DIMENSION

**\setxvalue** {...} {...}

- 1 NAME
- 2 CONTENT

**\setxvariable** {...} {...} {...}

- 1 NAME
- 2 KEY
- 3 VALUE

**\setxvariables** [...]<sup>1</sup> [...,...<sup>2</sup>...]

- 1 NAME
- 2 **set** = COMMAND  
**reset** = COMMAND  
KEY = VALUE

**\shapedhbox** {...}

- \* CONTENT

**\shiftbox** {...}

- 1 CONTENT

\SHIFT {...} *   CONTENT instances: shiftup shiftdown
\shiftdown {...} *   CONTENT
\shiftup {...} *   CONTENT
\showallmakeup
\showattributes
\showbodyfont [...,*,...] *   inherits: \setupbodyfont
\showbodyfontenvironment [...,*,...] *   inherits: \setupbodyfont
\showboxes
\showbtxdatasetauthors [...,*=...,...] *   specification = NAME                   OPT *   dataset       = NAME *   field         = address assignee author booktitle chapter day dayfiled edition editor howpublished institution *                   journal language month monthfiled nationality note number one two organization pages publisher *                   school series title type volume year yearfiled NAME
\showbtxdatasetauthors [...*] *   NAME                                   OPT
\showbtxdatasetcompleteness [...,*=...,...] *   specification = NAME                   OPT *   dataset       = NAME *   field         = address assignee author booktitle chapter day dayfiled edition editor howpublished institution *                   journal language month monthfiled nationality note number one two organization pages publisher *                   school series title type volume year yearfiled NAME
\showbtxdatasetcompleteness [...*] *   NAME                                   OPT
\showbtxdatasetfields [...,*=...,...] *   specification = NAME                   OPT *   dataset       = NAME *   field         = address assignee author booktitle chapter day dayfiled edition editor howpublished institution *                   journal language month monthfiled nationality note number one two organization pages publisher *                   school series title type volume year yearfiled NAME
\showbtxdatasetfields [...*] *   NAME                                   OPT
\showbtxfields [...,*=...,...] *   rotation       = NUMBER <sup>PT</sup> *   specification = NAME
\showbtxfields [...*] *   NAME                                   OPT



\showfontstrip [...,*,...] * inherits: \setupbodyfont
\showfontstyle [..., <sup>1</sup> ...] [..., <sup>2</sup> ...] [..., <sup>3</sup> ...] [..., <sup>4</sup> ...] 1 inherits: \setupbodyfont 2 rm ss tt mm hw cg 3 tf bf it sl bi bs 4 all NUMBER
\showframe [..., <sup>1</sup> ...] [..., <sup>2</sup> ...] 1 top header text <sup>OPT</sup> footer bottom <sup>OPT</sup> 2 leftedge leftmargin text rightmargin rightedge
\showglyphdata
\showglyphs
\showgrid [...,*,...] * reset <u>bottom</u> <u>top</u> none <u>all</u> lines frame nonumber <u>right</u> left outer <u>columns</u>
\showgridsnapping
\showhelp {...} [...] 1 TEXT 2 REFERENCE
\showhyphenationtrace [... <sup>1</sup> ] [... <sup>2</sup> ] 1 LANGUAGE 2 TEXT
\showhyphens {...} * TEXT
\showinjector [...,*,...] * NAME
\showjustification
\showkerning {...} * TEXT
\showlayout [...,*,...] * pt bp <u>cm</u> mm dd c <sup>OPT</sup> pc nd nc sp in
\showlayoutcomponents
\showligature {...} * TEXT
\showligatures [...] * FONT
\showlogcategories
\showmakeup [...*] * <u>makeup</u> all box <sup>OPT</sup> es line glyph fontkern hbox vbox vtop kern glue penalty strut whatsit simple simplehbox simplevbox simplevtop user math italic origin reset

<code>\showmargins</code>
<code>\showmessage {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...,...}</code> 1 NAME 2 NAME NUMBER 3 TEXT
<code>\showminimalbaseline</code>
<code>\shownextbox \<sup>1</sup>... {<sup>2</sup>...}</code> 1 CSNAME 2 CONTENT
<code>\showotfcomposition {<sup>1</sup>...} {<sup>2</sup>...} {<sup>3</sup>...}</code> 1 FONT 2 -1 1 +1 l2r r2l 3 TEXT
<code>\showpalet [<sup>1</sup>...] [<sup>2</sup>...,...]</code> 1 NAME OPT 2 <u>horizontal</u> vertical number value name
<code>\showparentchain \<sup>1</sup>... {<sup>2</sup>...}</code> 1 CSNAME 2 NAME
<code>\showprint [...,<sup>1</sup>...] [...,<sup>2</sup>...] [...,<sup>3</sup>...,...]</code> 1 inherits: \setuppapersize OPT OPT 2 inherits: \setuppapersize 3 inherits: \setuplayout
<code>\showsetups [...,*...]</code> * <u>pt</u> <u>bp</u> <u>cm</u> mm dd c <u>c</u> <sup>OPT</sup> pc nd nc sp in
<code>\showsetupsdefinition [...]</code> * NAME
<code>\showstruts</code>
<code>\showsymbolset [...]</code> * NAME
<code>\showtimer {.*}</code> * TEXT
<code>\showtokens [...]</code> * NAME
<code>\showtrackers</code>
<code>\showvalue {.*}</code> * NAME
<code>\showvariable {<sup>1</sup>...} {<sup>2</sup>...}</code> 1 NAME 2 KEY

$\backslash\text{showwarning}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.,...\}$ 1 NAME 2 NAME NUMBER 3 TEXT
$\backslash\text{signalrightpage}$
$\backslash\text{simplealignedbox}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ 1 DIMENSION 2 left right middle flushleft flushright inner outer 3 CONTENT
$\backslash\text{simplealignedboxplus}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ 1 DIMENSION 2 left right middle flushleft flushright inner outer 3 TEXT 4 CONTENT
$\backslash\text{simplealignedspreadbox}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ 1 DIMENSION 2 left right middle flushleft flushright inner outer 3 CONTENT
$\backslash\text{simplegroupedcommand}$ $\{.^1.\}$ $\{.^2.\}$ 1 COMMAND 2 COMMAND
$\backslash\text{simplereversealignedbox}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ 1 DIMENSION 2 left right middle flushleft flushright inner outer 3 CONTENT
$\backslash\text{simplereversealignedboxplus}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ 1 DIMENSION 2 left right middle flushleft flushright inner outer 3 TEXT 4 CONTENT
$\backslash\text{singalcharacteralign}$ $\{.^1.\}$ $\{.^2.\}$ 1 NUMBER 2 NUMBER
$\backslash\text{singlebond}$
$\backslash\text{sixthofsixarguments}$ $\{.^1.\}$ $\{.^2.\}$ $\{.^3.\}$ $\{.^4.\}$ $\{.^5.\}$ $\{.^6.\}$ 1 TEXT 2 TEXT 3 TEXT 4 TEXT 5 TEXT 6 TEXT
$\backslash\text{slanted}$
$\backslash\text{slantedbold}$
$\backslash\text{slantedface}$

1	FILE	
2	offset	= DIMENSION
	hoffset	= DIMENSION
	voffset	= DIMENSION
	width	= DIMENSION
	height	= DIMENSION
	n	= NUMBER
3	offset	= DIMENSION
	hoffset	= DIMENSION
	voffset	= DIMENSION
	width	= DIMENSION
	height	= DIMENSION
	n	= NUMBER

```
\slovenianNumerals {...}
*   NUMBER
```

```
\sloveniannumerals {...}
*   NUMBER
```

\small

\smallbodyfont

**\smallbold**

\smallbolditalic

\smallboldslanted

`\smallcapped {...}`  
\* TEXT

```
\smallcappedcharacters {...}
* NUMBER
```

`\smallcappedromannumerals {...}`  
\* NUMBER

\smaller

***\smallitalicbold***

\smallnormal

\smallskip

`\smallslanted`

***\smallslantedbold***

\smalltype

```
\smash [...] {\dots}
1  w h d tOPT
2  CONTENT
```

<code>\smashbox ...</code> <code>* CSNAME NUMBER</code>
<code>\smashboxed ...</code> <code>* CSNAME NUMBER</code>
<code>\smashedhbox ...<sup>1</sup> {...<sup>2</sup>}</code> <code>1 TEXT OPT</code> <code>2 CONTENT</code>
<code>\smashedvbox ...<sup>1</sup> {...<sup>2</sup>}</code> <code>1 TEXT OPT</code> <code>2 CONTENT</code>
<code>\snaptogrid [...<sup>1</sup>] \... {...<sup>3</sup>}</code> <code>1 normal standard<sup>OPT</sup>yes strict tolerant top bottom both broad fit first last high one low none line strut box min max</code> <code>middle math math:line math:halfline math:-line math:-halfline NAME</code> <code>2 CSNAME</code> <code>3 CONTENT</code>
<code>\snaptogrid [...<sup>1</sup>,...<sup>2</sup>] \... {...<sup>3</sup>}</code> <code>1 inherits: \define<sup>OPT</sup>gridsnapping</code> <code>2 CSNAME</code> <code>3 CONTENT</code>
<code>\someheadnumber [...<sup>1</sup>] [...<sup>2</sup>]</code> <code>1 SECTION</code> <code>2 previous current next first last</code>
<code>\somekindoftab [...<sup>1</sup>,...<sup>2</sup>,...<sup>3</sup>,...<sup>4</sup>]</code> <code>* alternative = horizontal <u>vertical</u></code> <code>width = DIMENSION</code> <code>height = DIMENSION</code> <code>n = NUMBER</code> <code>m = NUMBER</code>
<code>\someline [...]</code> <code>* REFERENCE</code>
<code>\somalocalfloat</code>
<code>\somenamedheadnumber {...<sup>1</sup>} {...<sup>2</sup>}</code> <code>1 SECTION</code> <code>2 previous current next first last</code>
<code>\someplace {...<sup>1</sup>} {...<sup>2</sup>} {...<sup>3</sup>} {...<sup>4</sup>} {...<sup>5</sup>} [...<sup>6</sup>]</code> <code>1 TEXT</code> <code>2 TEXT</code> <code>3 TEXT</code> <code>4 TEXT</code> <code>5 TEXT</code> <code>6 REFERENCE</code>
<code>\somewhere {...<sup>1</sup>} {...<sup>2</sup>} [...<sup>3</sup>]</code> <code>1 TEXT</code> <code>2 TEXT</code> <code>3 REFERENCE</code>
<code>\SORTING [...<sup>1</sup>] {...<sup>2</sup>}</code> <code>1 NAME OPT</code> <code>2 CONTENT</code> <code>instances: logo</code>



$\backslash logo$ [ <sup>1</sup> ...] { <sup>2</sup> ...} 1 NAME <small>OPT</small> 2 CONTENT
$\backslash space$
$\backslash spanishNumerals$ {.*} * NUMBER
$\backslash spanishnumerals$ {.*} * NUMBER
$\backslash splitatasterisk$ ... \ <sup>1</sup> ... \ <sup>2</sup> ... \ <sup>3</sup> ... 1 TEXT 2 CSNAME 3 CSNAME
$\backslash splitatcolon$ ... \ <sup>1</sup> ... \ <sup>2</sup> ... \ <sup>3</sup> ... 1 TEXT 2 CSNAME 3 CSNAME
$\backslash splitatcolons$ ... \ <sup>1</sup> ... \ <sup>2</sup> ... \ <sup>3</sup> ... 1 TEXT 2 CSNAME 3 CSNAME
$\backslash splitatcomma$ ... \ <sup>1</sup> ... \ <sup>2</sup> ... \ <sup>3</sup> ... 1 TEXT 2 CSNAME 3 CSNAME
$\backslash splitatperiod$ ... \ <sup>1</sup> ... \ <sup>2</sup> ... \ <sup>3</sup> ... 1 TEXT 2 CSNAME 3 CSNAME
$\backslash splitdfrac$ { <sup>1</sup> ...} { <sup>2</sup> ...} 1 CONTENT 2 CONTENT
$\backslash splitfilename$ {.*} * FILE
$\backslash splitfloat$ [...,\ <sup>1</sup> ...,...] { <sup>2</sup> ...} { <sup>3</sup> ...} 1 inherits: $\backslash setupfloats$ <small>OPT</small> splitting 2 COMMAND 3 CONTENT
$\backslash splitfrac$ { <sup>1</sup> ...} { <sup>2</sup> ...} 1 CONTENT 2 CONTENT
$\backslash splitoffbase$
$\backslash splitofffull$
$\backslash splitoffkind$
$\backslash splitoffname$

<code>\splitoffpath</code>
<code>\splitoffroot</code>
<code>\splitofftokens</code> <sup>1.</sup> <code>\from</code> <sup>2.</sup> <code>\to</code> <sup>3.</sup> <code>\...</code> 1    TEXT 2    TEXT 3    CSNAME
<code>\splitofftype</code>
<code>\splitstring</code> <sup>1.</sup> <code>\at</code> <sup>2.</sup> <code>\to</code> <sup>3.</sup> <code>\...</code> <code>\and</code> <sup>4.</sup> <code>\...</code> 1    TEXT 2    TEXT 3    CSNAME 4    CSNAME
<code>\spreadhbox</code> <sup>*</sup> <code>\...</code> <sup>*</sup> CSNAME NUMBER
<code>\sqrt</code> [ <sup>1.</sup> <code>\...</code> ] { <sup>2.</sup> <code>\...</code> } 1    TEXT <sup>OPT</sup> 2    CONTENT
<code>\stackrel</code> { <sup>1.</sup> <code>\...</code> } { <sup>2.</sup> <code>\...</code> } 1    CONTENT 2    CONTENT
<code>\start</code> [ <sup>*</sup> <code>\...</code> ] ... <code>\stop</code> <sup>*</sup> NAME <sup>OPT</sup>
<code>\startalignment</code> [... <sup>*</sup> ...] ... <code>\stopalignment</code> <sup>*</sup> inherits: <code>\setupalign</code>
<code>\startallmodes</code> [... <sup>*</sup> ...] ... <code>\stopallmodes</code> <sup>*</sup> NAME
<code>\startATTACHMENT</code> [ <sup>1.</sup> <code>\...</code> ] [... <sup>2.</sup> <code>\...</code> ] ... <code>\stopATTACHMENT</code> 1    NAME <sup>OPT</sup> <sup>OPT</sup> 2    inherits: <code>\setupattachment</code> instances: <code>attachment</code>
<code>\startattachment</code> [ <sup>1.</sup> <code>\...</code> ] [... <sup>2.</sup> <code>\...</code> ] ... <code>\stopattachment</code> 1    NAME <sup>OPT</sup> <sup>OPT</sup> 2    inherits: <code>\setupattachment</code>
<code>\startbackground</code> [... <sup>*</sup> <code>\...</code> ] ... <code>\stopbackground</code> <sup>*</sup> inherits: <code>\setupbackground</code> <sup>PT</sup>
<code>\startBACKGROUND</code> [... <sup>*</sup> <code>\...</code> ] ... <code>\stopBACKGROUND</code> <sup>*</sup> inherits: <code>\setupbackground</code> <sup>PT</sup> instances: <code>background</code>
<code>\startbar</code> [ <sup>*</sup> <code>\...</code> ] ... <code>\stopbar</code> <sup>*</sup> NAME
<code>\startbbordermatrix</code> ... <code>\stopbbordermatrix</code>

<code>\startbitmapimage [...,..<sup>*</sup>...,...] ... \stopbitmapimage</code> <code>* color = rgb cmyk gray</code> <code>width = DIMENSION</code> <code>height = DIMENSION</code> <code>x = NUMBER</code> <code>y = NUMBER</code>
<code>\startbordermatrix ... \stopbordermatrix</code>
<code>\startbtxrenderingdefinitions [...] ... \stopbtxrenderingdefinitions</code> <code>* NAME</code>
<code>\startbuffer [...] ... \stopbuffer</code> <code>* NAME OPT</code>
<code>\startBUFFER ... \stopBUFFER</code> <code>instances: hiding</code>
<code>\starthiding ... \stophiding</code>
<code>\startcatcodetable \*... ... \stopcatcodetable</code> <code>* CSNAME</code>
<code>\startcentraligned ... \stopcentraligned</code>
<code>\startcharacteralign [...,..<sup>*</sup>...,...] ... \stopcharacteralign</code> <code>* inherits: \setupcharacteralign</code>
<code>\startcharacteralign [...] ... \stopcharacteralign</code> <code>* TEXT number-&gt;TEXT text-&gt;TEXT<sup>OPT</sup></code>
<code>\startcheckedfences ... \stopcheckedfences</code>
<code>\startchemical [...<sup>1</sup>] [...,..<sup>2</sup>...,...] ... \stopchemical</code> <code>1 NAME OPT OPT</code> <code>2 inherits: \setupchemical</code>
<code>\startcollect ... \stopcollect</code>
<code>\startcollecting ... \stopcollecting</code>
<code>\startcolor [...] ... \stopcolor</code> <code>* COLOR</code>
<code>\startcolorintent [...] ... \stopcolorintent</code> <code>* knockout overprint none</code>
<code>\startcoloronly [...] ... \stopcoloronly</code> <code>* COLOR</code>
<code>\startcolorset [...] ... \stopcolorset</code> <code>* NAME</code>
<code>\startcolumns [...,..<sup>*</sup>...,...] ... \stopcolumns</code> <code>* inherits: \setupcolumns<sup>OPT</sup></code>

<pre> \startcolumnset [...] [...] ... \stopcolumnset 1  NAME          OPT          OPT 2  inherits: \setupcolumnset </pre>
<pre> \startcolumnsetspan [...] [...] ... \stopcolumnsetspan 1  NAME          OPT 2  inherits: \setupcolumnsetspan </pre>
<pre> \startCOLUMNSET [...] [...] ... \stopCOLUMNSET *  inherits: \setupcolumnset<sup>OPT</sup> </pre>
<pre> \startcolumnspan [...] [...] ... \stopcolumnspan *  inherits: \setupcolumnspan<sup>OPT</sup> </pre>
<pre> \startcombination [...] [...] ... \stopcombination 1  NAME          OPT          OPT 2  inherits: \setupcombination </pre>
<pre> \startcombination [...] [...] ... \stopcombination 1  NAME          OPT          OPT 2  N*M </pre>
<pre> \startCOMMENT [...] [...] ... \stopCOMMENT 1  TEXT          OPT          OPT 2  inherits: \setupcomment instances: comment </pre>
<pre> \startcomment [...] [...] ... \stopcomment 1  TEXT          OPT          OPT 2  inherits: \setupcomment </pre>
<pre> \startcomponent [...] ... \stopcomponent *  FILE * </pre>
<pre> \startcomponent ... ... \stopcomponent *  FILE * </pre>
<pre> \startcontextcode ... \stopcontextcode </pre>
<pre> \startcontextdefinitioncode ... \stopcontextdefinitioncode </pre>
<pre> \startctxfunction ... ... \stopctxfunction *  NAME </pre>
<pre> \startctxfunctiondefinition ... ... \stopctxfunctiondefinition *  NAME </pre>
<pre> \startcurrentcolor ... \stopcurrentcolor </pre>
<pre> \startcurrentlistentrywrapper ... \stopcurrentlistentrywrapper </pre>
<pre> \startdelimited [...] [...] [...] ... \stopdelimited 1  NAME          OPT          OPT 2  LANGUAGE 3  inherits: \startnarrower </pre>

$\backslash\text{startdelimitedtext} [\overset{1}{...}] [\overset{2}{...}] [\overset{3}{...},...] \dots \backslash\text{stopdelimitedtext}$ 1 NAME OPT OPT 2 LANGUAGE 3 inherits: $\backslash\text{startnarrower}$
$\backslash\text{startDELIMITEDTEXT} [\overset{1}{...}] [\dots,\overset{2}{...}] \dots \backslash\text{stopDELIMITEDTEXT}$ 1 LANGUAGE OPT OPT 2 inherits: $\backslash\text{startnarrower}$ instances: quotation quote blockquote speech aside
$\backslash\text{startaside} [\overset{1}{...}] [\dots,\overset{2}{...}] \dots \backslash\text{stopaside}$ 1 LANGUAGE OPT OPT 2 inherits: $\backslash\text{startnarrower}$
$\backslash\text{startblockquote} [\overset{1}{...}] [\dots,\overset{2}{...}] \dots \backslash\text{stopblockquote}$ 1 LANGUAGE OPT OPT 2 inherits: $\backslash\text{startnarrower}$
$\backslash\text{startquotation} [\overset{1}{...}] [\dots,\overset{2}{...}] \dots \backslash\text{stopquotation}$ 1 LANGUAGE OPT OPT 2 inherits: $\backslash\text{startnarrower}$
$\backslash\text{startquote} [\overset{1}{...}] [\dots,\overset{2}{...}] \dots \backslash\text{stopquote}$ 1 LANGUAGE OPT OPT 2 inherits: $\backslash\text{startnarrower}$
$\backslash\text{startspeech} [\overset{1}{...}] [\dots,\overset{2}{...}] \dots \backslash\text{stopspeech}$ 1 LANGUAGE OPT OPT 2 inherits: $\backslash\text{startnarrower}$
$\backslash\text{startDESCRIPTION} [\dots,\overset{*}{...}] \dots \backslash\text{stopDESCRIPTION}$ * title = TEXT OPT bookmark = TEXT list = TEXT reference = REFERENCE
$\backslash\text{startDESCRIPTION} [\overset{1}{...}] \{\overset{2}{...}\} \dots \backslash\text{stopDESCRIPTION}$ 1 REFERENCE OPT OPT 2 TEXT
$\backslash\text{startdisplaymath} \dots \backslash\text{stopdisplaymath}$
$\backslash\text{startdmath} \dots \backslash\text{stopdmath}$
$\backslash\text{startdocument} [\dots,\overset{*}{...}] \dots \backslash\text{stopdocument}$ * inherits: $\backslash\text{setupdocument}$ OPT
$\backslash\text{starteffect} [\overset{*}{...}] \dots \backslash\text{stopeffect}$ * NAME
$\backslash\text{startEFFECT} \dots \backslash\text{stopEFFECT}$
$\backslash\text{startelement} \{\overset{1}{...}\} [\dots,\overset{2}{...}] \dots \backslash\stopelement$ 1 NAME OPT 2 KEY = VALUE
$\backslash\text{startembeddedxtable} [\dots,\overset{*}{...}] \dots \backslash\text{stopembeddedxtable}$ * inherits: $\backslash\text{setupxtable}$ OPT

<pre> \startembeddedxtable [...] ... \stopembeddedxtable *   NAME                                OPT </pre>
<pre> \startENUMERATION [...,.*=...,...] ... \stopENUMERATION *   title       = TEXT                OPT     bookmark    = TEXT     list        = TEXT     reference    = REFERENCE </pre>
<pre> \startENUMERATION [...,<sup>1</sup>...] {<sup>2</sup>...} ... \stopENUMERATION 1   REFERENCE                OPT      OPT 2   TEXT </pre>
<pre> \startenvironment [...] ... \stopenvironment *   FILE * </pre>
<pre> \startenvironment ... ... \stopenvironment *   FILE * </pre>
<pre> \startexceptions [...] ... \stopexceptions *   LANGUAGE </pre>
<pre> \startexpanded ... \stopexpanded </pre>
<pre> \startexpandedcollect ... \stopexpandedcollect </pre>
<pre> \startextendedcatcodetable \.* ... \stopextendedcatcodetable *   CSNAME </pre>
<pre> \startexternalfigurecollection [...] ... \stopexternalfigurecollection *   NAME </pre>
<pre> \startfacingfloat [...] ... \stopfacingfloat *   NAME </pre>
<pre> \startfigure [<sup>1</sup>...] [<sup>2</sup>...] [...,<sup>3</sup>=...,...] ... \stopfigure 1   NAME                                OPT 2   FILE 3   inherits: \externalfigure </pre>
<pre> \startfittingpage [<sup>1</sup>...] [...,<sup>2</sup>=...,...] ... \stopfittingpage 1   NAME                                OPT 2   inherits: \setupfittingpage </pre>
<pre> \startFITTINGPAGE [...,.*=...,...] ... \stopFITTINGPAGE *   inherits: \setupfittingpage<sup>OPT</sup> instances: TEXpage MPpage </pre>
<pre> \startMPpage [...,.*=...,...] ... \stopMPpage *   inherits: \setupfittingpage<sup>OPT</sup> </pre>
<pre> \startTEXpage [...,.*=...,...] ... \stopTEXpage *   inherits: \setupfittingpage<sup>OPT</sup> </pre>
<pre> \startfixed [...] ... \stopfixed *   low middle high<sup>OPT</sup>lohi <u>default</u> </pre>
<pre> \startfloatcombination [...,.*=...,...] ... \stopfloatcombination *   inherits: \setupcombination<sup>OPT</sup> </pre>

**\startfloatcombination [...]** ... **\stopfloatcombination**

\* N\*M NAME OPT

**\startFLOATtext [...,<sup>1</sup>...] [...,<sup>2</sup>...] {...} ... \stopFLOATtext**

1 split always left right inner outer <sup>PP</sup>backspace cutspace inleft inright inmargin leftmargin rightmargin leftedge  
rightedge innermargin outermargin inneredge outeredge text opposite reset height depth [-+]line halfline grid high  
low fit 90 180 270 nonumber none local here force margin [-+]hang hanging tall both middle offset top bottom auto  
page leftpage rightpage somewhere effective header footer

2 REFERENCE

3 TEXT

instances: chemical figure table intermezzo graphic

**\startchemicaltext [...,<sup>1</sup>...] [...,<sup>2</sup>...] {...} ... \stopchemicaltext**

1 split always left right inner outer <sup>PP</sup>backspace cutspace inleft inright inmargin leftmargin rightmargin leftedge  
rightedge innermargin outermargin inneredge outeredge text opposite reset height depth [-+]line halfline grid high  
low fit 90 180 270 nonumber none local here force margin [-+]hang hanging tall both middle offset top bottom auto  
page leftpage rightpage somewhere effective header footer

2 REFERENCE

3 TEXT

**\startfiguretext [...,<sup>1</sup>...] [...,<sup>2</sup>...] {...} ... \stopfiguretext**

1 split always left right inner outer <sup>PP</sup>backspace cutspace inleft inright inmargin leftmargin rightmargin leftedge  
rightedge innermargin outermargin inneredge outeredge text opposite reset height depth [-+]line halfline grid high  
low fit 90 180 270 nonumber none local here force margin [-+]hang hanging tall both middle offset top bottom auto  
page leftpage rightpage somewhere effective header footer

2 REFERENCE

3 TEXT

**\startgraphictext [...,<sup>1</sup>...] [...,<sup>2</sup>...] {...} ... \stopgraphictext**

1 split always left right inner outer <sup>PP</sup>backspace cutspace inleft inright inmargin leftmargin rightmargin leftedge  
rightedge innermargin outermargin inneredge outeredge text opposite reset height depth [-+]line halfline grid high  
low fit 90 180 270 nonumber none local here force margin [-+]hang hanging tall both middle offset top bottom auto  
page leftpage rightpage somewhere effective header footer

2 REFERENCE

3 TEXT

**\startintermezzotext [...,<sup>1</sup>...] [...,<sup>2</sup>...] {...} ... \stopintermezzotext**

1 split always left right inner outer <sup>PP</sup>backspace cutspace inleft inright inmargin leftmargin rightmargin leftedge  
rightedge innermargin outermargin inneredge outeredge text opposite reset height depth [-+]line halfline grid high  
low fit 90 180 270 nonumber none local here force margin [-+]hang hanging tall both middle offset top bottom auto  
page leftpage rightpage somewhere effective header footer

2 REFERENCE

3 TEXT

**\starttabletext [...,<sup>1</sup>...] [...,<sup>2</sup>...] {...} ... \stoptabletext**

1 split always left right inner outer <sup>PP</sup>backspace cutspace inleft inright inmargin leftmargin rightmargin leftedge  
rightedge innermargin outermargin inneredge outeredge text opposite reset height depth [-+]line halfline grid high  
low fit 90 180 270 nonumber none local here force margin [-+]hang hanging tall both middle offset top bottom auto  
page leftpage rightpage somewhere effective header footer

2 REFERENCE

3 TEXT

**\startfont [...]** ... **\stopfont**

\* FONT OPT

**\startfontclass [...]** ... **\stopfontclass**

\* each NAME

**\startfontsolution [...]** ... **\stopfontsolution**

\* NAME

**\startformula [...,<sup>\*</sup>...] ... \stopformula**

\* packed tight middle <sup>OPF</sup>frame depth line halfline -line -halfline inherits: \setupbodyfont

**\startformulas [...,<sup>\*</sup>...] ... \stopformulas**

\* + - REFERENCE OPT

<pre> \startformula [...,*...] ... \stopformula * option = packed tight middle frame depth line halflines -line -halflines inherits: \setupbodyfont margin = yes no standard DIMENSION grid = inherits: \snaptogrid </pre>
<pre> \startFORMULAformula [...,*...] ... \stopFORMULAformula * packed tight middle frame depth line halflines -line -halflines inherits: \setupbodyfont instances: sp sd mp md </pre>
<pre> \startmdformula [...,*...] ... \stopmdformula * packed tight middle frame depth line halflines -line -halflines inherits: \setupbodyfont </pre>
<pre> \startmpformula [...,*...] ... \stopmpformula * packed tight middle frame depth line halflines -line -halflines inherits: \setupbodyfont </pre>
<pre> \startsdformula [...,*...] ... \stopsdformula * packed tight middle frame depth line halflines -line -halflines inherits: \setupbodyfont </pre>
<pre> \startspformula [...,*...] ... \stopspformula * packed tight middle frame depth line halflines -line -halflines inherits: \setupbodyfont </pre>
<pre> \startframed [...<sup>1</sup>] [...,*<sup>2</sup>...] ... \stopframed 1 NAME OPT OPT 2 inherits: \setupframed </pre>
<pre> \startframedcell [...,*...] ... \stopframedcell * inherits: \setupframed OPT </pre>
<pre> \startframedcontent [...*] ... \stopframedcontent * NAME off OPT </pre>
<pre> \startframedrow [...,*...] ... \stopframedrow * inherits: \setupframed OPT </pre>
<pre> \startframedtable [...<sup>1</sup>] [...,*<sup>2</sup>...] ... \stopframedtable 1 NAME OPT OPT 2 inherits: \setupframed </pre>
<pre> \startFRAMEDTEXT [...<sup>1</sup>] [...,*<sup>2</sup>...] ... \stopFRAMEDTEXT 1 left right middle none OPT 2 inherits: \setupframedtext instances: framedtext </pre>
<pre> \startframedtext [...<sup>1</sup>] [...,*<sup>2</sup>...] ... \stopframedtext 1 left right middle none OPT 2 inherits: \setupframedtext </pre>
<pre> \startgoto [...*] ... \stopgoto * REFERENCE </pre>
<pre> \startgridsnapping [...*] ... \stopgridsnapping * normal standard yes strict tolerant top bottom both broad fit first last high one low none line strut box min max middle math math:line math:halflines math:-line math:-halflines NAME </pre>
<pre> \startgridsnapping [...,*...] ... \stopgridsnapping * inherits: \definegridsnapping OPT </pre>



```
\starthanging [...,\stackrel{1}{...}] {...} ... \stophanging
1 distance = DIMENSIONOPT
  n        = NUMBER
  location = left right
2 CONTENT
```

```
\starthanging [...,\stackrel{1}{...}] {...} ... \stophanging
1 left right OPT
2 CONTENT
```

```
\starthboxestohbox ... \stophboxestohbox
```

```
\starthboxregister ... \stophboxregister
* CSNAME NUMBER
```

```
\starthead [...,\stackrel{1}{...}] {...} ... \stophead
1 REFERENCE OPT
2 TEXT
```

```
\starthelptext [...,\stackrel{1}{...}] ... \stophelptext
* REFERENCE OPT
```

```
\startHELP [...,\stackrel{1}{...}] ... \stopHELP
* REFERENCE OPT
instances: helptext
```

```
\starthelptext [...,\stackrel{1}{...}] ... \stophelptext
* REFERENCE OPT
```

```
\starthighlight [...,\stackrel{1}{...}] ... \stophighlight
* NAME
```

```
\starthyphenation [...,\stackrel{1}{...}] ... \stophyphenation
* original tex default hyphenate expanded traditional none
```

```
\startimath ... \stopimath
```

```
\startindentedtext [...,\stackrel{1}{...}] ... \stopindentedtext
* NAME
```

```
\startINDENTEDTEXT ... \stopINDENTEDTEXT
```

```
\startinteraction [...,\stackrel{1}{...}] ... \stopinteraction
* hidden NAME
```

```
\startinteractionmenu [...,\stackrel{1}{...}] ... \stopinteractionmenu
* NAME
```

```
\startinterface ... \stopinterface
* all LANGUAGE
```

```
\startintertext ... \stopintertext
```

```
\startitem [...,\stackrel{1}{...}] ... \stopitem
* REFERENCE OPT
```

$\backslash\text{startitemgroup} [\overset{1}{...}] [\overset{2}{...},...] [\overset{3}{...},\dots,...] \dots \backslash\text{stopitemgroup}$ <ol style="list-style-type: none"> <li>NAME</li> <li>inherits: <math>\backslash\text{setupitemgroup}</math></li> <li>inherits: <math>\backslash\text{setupitemgroup}</math></li> </ol>
$\backslash\text{startITEMGROUP} [\overset{1}{...},...] [\overset{2}{...},\dots,] \dots \backslash\text{stopITEMGROUP}$ <ol style="list-style-type: none"> <li>inherits: <math>\backslash\text{setupitemgroup}</math></li> <li>inherits: <math>\backslash\text{setupitemgroup}</math></li> </ol> <p>instances: itemize</p>
$\backslash\text{startitemize} [\overset{1}{...},...] [\overset{2}{...},\dots,] \dots \backslash\text{stopitemize}$ <ol style="list-style-type: none"> <li>inherits: <math>\backslash\text{setupitemgroup}</math></li> <li>inherits: <math>\backslash\text{setupitemgroup}</math></li> </ol>
$\backslash\text{startJScode} \overset{1}{...} \overset{2}{...} \overset{3}{...} \dots \backslash\text{stopJScode}$ <ol style="list-style-type: none"> <li>NAME</li> <li>uses</li> <li>NAME</li> </ol>
$\backslash\text{startJSreamble} \overset{1}{...} \overset{2}{...} \overset{3}{...} \dots \backslash\text{stopJSreamble}$ <ol style="list-style-type: none"> <li>NAME</li> <li>used</li> <li>now later</li> </ol>
$\backslash\text{startknockout} \dots \backslash\text{stopknockout}$
$\backslash\text{startLABELtext} [\overset{1}{...}] [\overset{2}{...}] \dots \backslash\text{stopLABELtext}$ <ol style="list-style-type: none"> <li>LANGUAGE</li> <li>KEY</li> </ol> <p>instances: head label mathlabel taglabel unit operator prefix suffix btxlabel</p>
$\backslash\text{startbtxlabeltext} [\overset{1}{...}] [\overset{2}{...}] \dots \backslash\text{stopbtxlabeltext}$ <ol style="list-style-type: none"> <li>LANGUAGE</li> <li>KEY</li> </ol>
$\backslash\text{startheadtext} [\overset{1}{...}] [\overset{2}{...}] \dots \backslash\text{stopheadtext}$ <ol style="list-style-type: none"> <li>LANGUAGE</li> <li>KEY</li> </ol>
$\backslash\text{startlabeltext} [\overset{1}{...}] [\overset{2}{...}] \dots \backslash\text{stoplabeltext}$ <ol style="list-style-type: none"> <li>LANGUAGE</li> <li>KEY</li> </ol>
$\backslash\text{startmathlabeltext} [\overset{1}{...}] [\overset{2}{...}] \dots \backslash\text{stopmathlabeltext}$ <ol style="list-style-type: none"> <li>LANGUAGE</li> <li>KEY</li> </ol>
$\backslash\text{startoperatortext} [\overset{1}{...}] [\overset{2}{...}] \dots \backslash\text{stopoperatortext}$ <ol style="list-style-type: none"> <li>LANGUAGE</li> <li>KEY</li> </ol>
$\backslash\text{startprefixtext} [\overset{1}{...}] [\overset{2}{...}] \dots \backslash\text{stopprefixtext}$ <ol style="list-style-type: none"> <li>LANGUAGE</li> <li>KEY</li> </ol>
$\backslash\text{startsuffixtext} [\overset{1}{...}] [\overset{2}{...}] \dots \backslash\text{stopsuffixtext}$ <ol style="list-style-type: none"> <li>LANGUAGE</li> <li>KEY</li> </ol>
$\backslash\text{starttaglabeltext} [\overset{1}{...}] [\overset{2}{...}] \dots \backslash\text{stoptaglabeltext}$ <ol style="list-style-type: none"> <li>LANGUAGE</li> <li>KEY</li> </ol>

<code>\startunittext [...]<sup>1</sup> [...]<sup>2</sup> ... \stopunittext</code> 1    LANGUAGE                    OPT 2    KEY
<code>\startlayout [...]<sup>*</sup> ... \stoplayout</code> *    NAME
<code>\startleftaligned ... \stopleftaligned</code>
<code>\startline [...]<sup>*</sup></code> *    REFERENCE
<code>\startlinealignment [...]<sup>*</sup> ... \stoplinealignment</code> *    left middle right max
<code>\startlinecorrection [...]<sup>*</sup> [...] ... \stoplinecorrection</code> *    blank inherits: \blank                    OPT
<code>\startlinefiller [...]<sup>1</sup> [...]<sup>2</sup> [...] ... \stoplinefiller</code> 1    filler NAME                    OPT 2    inherits: \setuplinefiller
<code>\startLINENOTE [...]<sup>1</sup> {...}<sup>2</sup></code> 1    REFERENCE 2    TEXT instances: linenote
<code>\startlinenote [...]<sup>1</sup> {...}<sup>2</sup></code> 1    REFERENCE 2    TEXT
<code>\startlinenumbering [...]<sup>1</sup> [...]<sup>2</sup> [...] ... \stoplinenumbering</code> 1    NAME                    OPT                    OPT 2    continue    =   yes <u>no</u> start    =   NUMBER step     =   NUMBER method   =   page <u>first</u> next
<code>\startlinenumbering [...]<sup>1</sup> [...]<sup>2</sup> ... \stoplinenumbering</code> 1    NAME                    OPT                    OPT 2    continue NUMBER
<code>\startLINES [...]<sup>*</sup> [...] ... \stopLINES</code> *    inherits: \setuplines <sup>OPT</sup> instances: lines
<code>\startlines [...]<sup>*</sup> [...] ... \stoplines</code> *    inherits: \setuplines <sup>OPT</sup>
<code>\startlinetable ... \stoplinetable</code>
<code>\startlinetablebody ... \stoplinetablebody</code>
<code>\startlinetablecell [...]<sup>*</sup> [...] ... \stoplinetablecell</code> *    inherits: \setuplinetable                    OPT
<code>\startlinetablehead ... \stoplinetablehead</code>
<code>\startlocalfootnotes ... \stoplocalfootnotes</code>

<code>\startlocalheadsetup ... \stoplocalheadsetup</code>
<code>\startlocallinecorrection [...,*,...] ... \stoplocallinecorrection</code> *    blank inherits: \blank <span style="float:right">OPT</span>
<code>\startlocalnotes [...,*,...] ... \stoplocalnotes</code> *    NAME
<code>\startlocalsetups [...<sup>1</sup>] [...<sup>2</sup>] ... \stoplocalsetups</code> 1    grid <span style="float:right">OPT</span> 2    NAME
<code>\startlocalsetups .* ... \stoplocalsetups</code> *    NAME
<code>\startlua ... \stoplua</code>
<code>\startluacode ... \stopluacode</code>
<code>\startluaparameterset [...] ... \stopluaparameterset</code> *    NAME
<code>\startluasetups [...<sup>1</sup>] [...<sup>2</sup>] ... \stopluasetups</code> 1    grid <span style="float:right">OPT</span> 2    NAME
<code>\startluasetups .* ... \stopluasetups</code> *    NAME
<code>\startMPclip {...} ... \stopMPclip</code> *    NAME
<code>\startMPcode {...} ... \stopMPcode</code> *    NAME <span style="float:right">OPT</span>
<code>\startMPdefinitions {...} ... \stopMPdefinitions</code> *    NAME <span style="float:right">OPT</span>
<code>\startMPdrawing [...] ... \stopMPdrawing</code> *    - <span style="float:right">OPT</span>
<code>\startMPenvironment [...] ... \stopMPenvironment</code> *    reset global + <span style="float:right">OPT</span>
<code>\startMPextensions {...,*,...} ... \stopMPextensions</code> *    NAME <span style="float:right">OPT</span>
<code>\startMPinclusions [...<sup>1</sup>] {...<sup>2</sup>} ... \stopMPinclusions</code> 1    + <span style="float:right">OPT    OPT</span> 2    NAME
<code>\startMPinitializations ... \stopMPinitializations</code>
<code>\startMPpositiongraphic {...} {...<sup>2</sup>,...} ... \stopMPpositiongraphic</code> 1    NAME <span style="float:right">OPT</span> 2    KEY

$\backslash\text{startMPpositionmethod}$ {...} ... $\backslash\text{stopMPpositionmethod}$ * NAME
$\backslash\text{startMPPrun}$ {...} ... $\backslash\text{stopMPPrun}$ * NAME <small>OPT</small>
$\backslash\text{startmakeup}$ [...] [..., <small><sup>1</sup></small> ... <small><sup>2</sup></small> ...,...] ... $\backslash\text{stopmakeup}$ 1 NAME <small>OPT</small> 2 inherits: $\backslash\text{setupmakeup}$
$\backslash\text{startMAKEUPmakeup}$ [..., <small>*</small> ...,...] ... $\backslash\text{stopMAKEUPmakeup}$ * inherits: $\backslash\text{setupmakeup}$ <small>OPT</small> instances: standard page text middle
$\backslash\text{startmiddlemakeup}$ [..., <small>*</small> ...,...] ... $\backslash\text{stopmiddlemakeup}$ * inherits: $\backslash\text{setupmakeup}$ <small>OPT</small>
$\backslash\text{startpagemakeup}$ [..., <small>*</small> ...,...] ... $\backslash\text{stoppagemakeup}$ * inherits: $\backslash\text{setupmakeup}$ <small>OPT</small>
$\backslash\text{startstandardmakeup}$ [..., <small>*</small> ...,...] ... $\backslash\text{stopstandardmakeup}$ * inherits: $\backslash\text{setupmakeup}$ <small>OPT</small>
$\backslash\text{starttextmakeup}$ [..., <small>*</small> ...,...] ... $\backslash\text{stoptextmakeup}$ * inherits: $\backslash\text{setupmakeup}$ <small>OPT</small>
$\backslash\text{startmarginblock}$ [...] ... $\backslash\text{stopmarginblock}$ * NAME <small>OPT</small>
$\backslash\text{startmarginrule}$ [...] ... $\backslash\text{stopmarginrule}$ * NUMBER <small>OPT</small>
$\backslash\text{startmarginrule}$ [..., <small>*</small> ...,...] ... $\backslash\text{stopmarginrule}$ * inherits: $\backslash\text{setupmarginrule}$ <small>OPT</small>
$\backslash\text{startmarkedcontent}$ [...] ... $\backslash\text{stopmarkedcontent}$ * reset <u>all</u> NAME <small>OPT</small>
$\backslash\text{startmarkpages}$ [...] ... $\backslash\text{stopmarkpages}$ * NAME
$\backslash\text{startMATHALIGNMENT}$ [..., <small>*</small> ...,...] ... $\backslash\text{stopMATHALIGNMENT}$ * inherits: $\backslash\text{setupmathalignment}$ <small>OPT</small> instances: align mathalignment
$\backslash\text{startalign}$ [..., <small>*</small> ...,...] ... $\backslash\text{stopalign}$ * inherits: $\backslash\text{setupmath}$ <small>OPT</small> alignment
$\backslash\text{startmathalignment}$ [..., <small>*</small> ...,...] ... $\backslash\text{stopmathalignment}$ * inherits: $\backslash\text{setupmathalignment}$ <small>OPT</small>
$\backslash\text{startMATHCASES}$ [..., <small>*</small> ...,...] ... $\backslash\text{stopMATHCASES}$ * inherits: $\backslash\text{setupmathcases}$ <small>OPT</small> instances: cases mathcases
$\backslash\text{startcases}$ [..., <small>*</small> ...,...] ... $\backslash\text{stopcases}$ * inherits: $\backslash\text{setupmath}$ <small>OPT</small> cases

$\backslash\text{startmathcases}$ [...,*=...,...] ... $\backslash\text{stopmathcases}$ * inherits: $\backslash\text{setupmathcases}$ <sup>OPT</sup>
$\backslash\text{startMATHMATRIX}$ [...,*=...,...] ... $\backslash\text{stopMATHMATRIX}$ * inherits: $\backslash\text{setupmathmatrix}$ <sup>OPT</sup> <b>instances:</b> <code>matrix mathmatrix</code>
$\backslash\text{startmathmatrix}$ [...,*=...,...] ... $\backslash\text{stopmathmatrix}$ * inherits: $\backslash\text{setupmathmatrix}$ <sup>OPT</sup>
$\backslash\text{startmatrix}$ [...,*=...,...] ... $\backslash\text{stopmatrix}$ * inherits: $\backslash\text{setupmathmatrix}$ <sup>OPT</sup>
$\backslash\text{startmathmode}$ ... $\backslash\text{stopmathmode}$
$\backslash\text{startmathstyle}$ [...,*=...,...] ... $\backslash\text{stopmathstyle}$ * display text script scriptscript cramped uncramped normal packed small big NAME
$\backslash\text{startmatrices}$ [...,*=...,...] ... $\backslash\text{stopmatrices}$ * inherits: $\backslash\text{setupmathmatrix}$ <sup>OPT</sup>
$\backslash\text{startmaxaligned}$ ... $\backslash\text{stopmaxaligned}$
$\backslash\text{startmidaligned}$ ... $\backslash\text{stopmidaligned}$
$\backslash\text{startmiddlealigned}$ ... $\backslash\text{stopmiddlealigned}$
$\backslash\text{startmixedcolumns}$ [ <sup>1</sup> ...] [..., <sup>2</sup> ...,...] ... $\backslash\text{stopmixedcolumns}$ 1 NAME OPT OPT 2 inherits: $\backslash\text{setupmixedcolumns}$
$\backslash\text{startMIXEDCOLUMNS}$ [...,*=...,...] ... $\backslash\text{stopMIXEDCOLUMNS}$ * inherits: $\backslash\text{setupmixedcolumns}$ <sup>OPT</sup> <b>instances:</b> <code>itemgroupcolumns boxedcolumns</code>
$\backslash\text{startboxedcolumns}$ [...,*=...,...] ... $\backslash\text{stopboxedcolumns}$ * inherits: $\backslash\text{setupmixedcolumns}$ <sup>OPT</sup>
$\backslash\text{startitemgroupcolumns}$ [...,*=...,...] ... $\backslash\text{stopitemgroupcolumns}$ * inherits: $\backslash\text{setupmixedcolumns}$ OPT
$\backslash\text{startmode}$ [...,*=...,...] ... $\backslash\text{stopmode}$ * NAME
$\backslash\text{startmodeset}$ [..., <sup>1</sup> ...] {..., <sup>2</sup> ...} ... $\backslash\text{stopmodeset}$ 1 NAME default 2 CONTENT
$\backslash\text{startmodule}$ [...,*=...,...] ... $\backslash\text{stopmodule}$ * FILE
$\backslash\text{startmoduletestsection}$ ... $\backslash\text{stopmoduletestsection}$
$\backslash\text{startmodule}$ ... ... $\backslash\text{stopmodule}$ * FILE

```

\startnamedsection [...]1 [...,2...,...]OPT [...,3...,...]OPT ... \stopnamedsection
1 SECTION
2 title = TEXT
  bookmark = TEXT
  marking = TEXT
  list = TEXT
  reference = REFERENCE
  ownnumber = TEXT
3 KEY = VALUE

```

```

\startnamedsubformulas [...]1 {...}2 ... \stopnamedsubformulas
1 + - REFERENCEOPT
2 TEXT

```

```

\startnarrow [...]1 [...,2...,...]OPT ... \stopnarrow
1 NAMEOPT
2 inherits: \setupnarrowerOPT

```

```

\startnarrower [...]*,...] ... \stopnarrower
* [-+]left [-+]middle {2[-+]right NUMBER*left NUMBER*middle NUMBER*right reset reverse

```

```

\startNARROWER [...]*,...] ... \stopNARROWER
* [-+]left [-+]middle {2[-+]right NUMBER*left NUMBER*middle NUMBER*right reset reverse

```

```

\startnarrow [...]1 [...,2...,...]OPT ... \stopnarrow
1 inherits: \setupnarrowerOPT
2 [-+]left [-+]middle [-+]right NUMBER*left NUMBER*middle NUMBER*right reset reverse

```

```

\startnarrow [...]1 [...,2...,...]OPT ... \stopnarrow
1 NAMEOPT
2 [-+]left [-+]middle [-+]right NUMBER*left NUMBER*middle NUMBER*right reset reverse

```

```

\startnegative ... \stopnegative

```

```

\startnicelyfilledbox [...]1 [...,2...,...]OPT ... \stopnicelyfilledbox
* width = DIMENSIONOPT
  height = DIMENSION
  offset = DIMENSION
  strut = yes no

```

```

\startnointerference ... \stopnointerference

```

```

\startnotallmodes [...]*,...] ... \stopnotallmodes
* NAME

```

```

\startnotext ... \stopnotext

```

```

\startNOTE [...]*,...] ... \stopNOTE
* REFERENCEOPT
instances: footnote endnote

```

```

\startNOTE [...]1 [...,2...,...]OPT ... \stopNOTE
* title = TEXTOPT
  bookmark = TEXT
  list = TEXT
  reference = REFERENCE
instances: footnote endnote

```

```

\startendnote [...]1 [...,2...,...]OPT ... \stopendnote
* title = TEXTOPT
  bookmark = TEXT
  list = TEXT
  reference = REFERENCE

```

<pre> \startfootnote [...,*,...] ... \stopfootnote * title      = TEXT      OPT   bookmark   = TEXT   list       = TEXT   reference  = REFERENCE </pre>
<pre> \startendnote [...,*,...] ... \stopendnote * REFERENCE      OPT </pre>
<pre> \startfootnote [...,*,...] ... \stopfootnote * REFERENCE      OPT </pre>
<pre> \startnotmode [...,*,...] ... \stopnotmode * NAME </pre>
<pre> \startopposite ... \stopopposite </pre>
<pre> \startoutputstream [...] ... \stopoutputstream * NAME </pre>
<pre> \startoverlay ... \stopoverlay </pre>
<pre> \startoverprint ... \stopoverprint </pre>
<pre> \startpacked [...] ... \stoppacked * blank      OPT </pre>
<pre> \startpagecolumns [...,*,...] ... \stoppagecolumns * inherits: \setuppagecolumns<sup>OPT</sup> </pre>
<pre> \startPAGECOLUMNS ... \stopPAGECOLUMNS </pre>
<pre> \startpagecolumns [...] ... \stoppagecolumns * NAME      OPT </pre>
<pre> \startpagecomment ... \stoppagecomment </pre>
<pre> \startpagefigure [.1.] [...,*2,...] ... \stoppagefigure 1 FILE      OPT 2 offset = default overlay none DIMENSION </pre>
<pre> \startpagelayout [...] ... \stoppagelayout * page leftpage rightpage </pre>
<pre> \startpar [.1.] [...,*2,...] ... \stoppar 1 NAME      OPT      OPT 2 inherits: \setupparagraph </pre>
<pre> \startparagraph [.1.] [...,*2,...] ... \stopparagraph 1 NAME      OPT      OPT 2 inherits: \setupparagraph </pre>
<pre> \startparagraphs [...] ... \stopparagraphs * NAME </pre>
<pre> \startparagraphscell ... \stopparagraphscell </pre>



`\startPARAGRAPHS ... \stopPARAGRAPHS`

`\startPARALLEL ... \stopPARALLEL`

`\startparbuilder [...] ... \stopparbuilder`

\* default oneline basic NAME

`\startplacefloat [...1...] [...2...] [...3...] ... \stopplacefloat`

```
1 SINGULAR
2 title      = TEXT
  bookmark   = TEXT
  marking    = TEXT
  list       = TEXT
  location   = split always left right inner outer backspace cutspace inleft inright inmargin leftmargin rightmargin
               leftedge rightedge innermargin outermargin inneredge outeredge text opposite reset height depth
               [--]line halfline grid high low fit 90 180 270 nonumber none local here force margin [--]hang
               hanging tall both middle offset top bottom auto page leftpage rightpage somewhere effective header
               footer
  reference  = REFERENCE
3 KEY = VALUE
```

`\startplaceFLOAT [...1...] [...2...] ... \stopplaceFLOAT`

```
1 title      = TEXT
  bookmark   = TEXT
  marking    = TEXT
  list       = TEXT
  location   = split always left right inner outer backspace cutspace inleft inright inmargin leftmargin rightmargin
               leftedge rightedge innermargin outermargin inneredge outeredge text opposite reset height depth
               [--]line halfline grid high low fit 90 180 270 nonumber none local here force margin [--]hang
               hanging tall both middle offset top bottom auto page leftpage rightpage somewhere effective header
               footer
  reference  = REFERENCE
2 KEY = VALUE
instances: chemical figure table intermezzo graphic
```

`\startplacechemical [...1...] [...2...] ... \stopplacechemical`

```
1 title      = TEXT
  bookmark   = TEXT
  marking    = TEXT
  list       = TEXT
  location   = split always left right inner outer backspace cutspace inleft inright inmargin leftmargin rightmargin
               leftedge rightedge innermargin outermargin inneredge outeredge text opposite reset height depth
               [--]line halfline grid high low fit 90 180 270 nonumber none local here force margin [--]hang
               hanging tall both middle offset top bottom auto page leftpage rightpage somewhere effective header
               footer
  reference  = REFERENCE
2 KEY = VALUE
```

`\startplacefigure [...1...] [...2...] ... \stopplacefigure`

```
1 title      = TEXT
  bookmark   = TEXT
  marking    = TEXT
  list       = TEXT
  location   = split always left right inner outer backspace cutspace inleft inright inmargin leftmargin rightmargin
               leftedge rightedge innermargin outermargin inneredge outeredge text opposite reset height depth
               [--]line halfline grid high low fit 90 180 270 nonumber none local here force margin [--]hang
               hanging tall both middle offset top bottom auto page leftpage rightpage somewhere effective header
               footer
  reference  = REFERENCE
2 KEY = VALUE
```

```

\startplacegraphic [...,\1,...,] [...,\2,...,] ... \stopplacegraphic
1 title = TEXT OPT OPT
bookmark = TEXT
marking = TEXT
list = TEXT
location = split always left right inner outer backspace cutspace inleft inright inmargin leftmargin rightmargin
leftedge rightedge innermargin outermargin inneredge outeredge text opposite reset height depth
[-+]line halfline grid high low fit 90 180 270 nonumber none local here force margin [-+]hang
hanging tall both middle offset top bottom auto page leftpage rightpage somewhere effective header
footer
reference = REFERENCE
2 KEY = VALUE

```

```

\startplaceintermezzo [...,\1,...,] [...,\2,...,] ... \stopplaceintermezzo
1 title = TEXT OPT OPT
bookmark = TEXT
marking = TEXT
list = TEXT
location = split always left right inner outer backspace cutspace inleft inright inmargin leftmargin rightmargin
leftedge rightedge innermargin outermargin inneredge outeredge text opposite reset height depth
[-+]line halfline grid high low fit 90 180 270 nonumber none local here force margin [-+]hang
hanging tall both middle offset top bottom auto page leftpage rightpage somewhere effective header
footer
reference = REFERENCE
2 KEY = VALUE

```

```

\startplacetable [...,\1,...,] [...,\2,...,] ... \stopplacetable
1 title = TEXT OPT OPT
bookmark = TEXT
marking = TEXT
list = TEXT
location = split always left right inner outer backspace cutspace inleft inright inmargin leftmargin rightmargin
leftedge rightedge innermargin outermargin inneredge outeredge text opposite reset height depth
[-+]line halfline grid high low fit 90 180 270 nonumber none local here force margin [-+]hang
hanging tall both middle offset top bottom auto page leftpage rightpage somewhere effective header
footer
reference = REFERENCE
2 KEY = VALUE

```

```

\startplaceformula [...,\*,...,] ... \stopplaceformula
* title = TEXT OPT
suffix = TEXT
reference = + - REFERENCE

```

```

\startplaceformula [...,\*,...,] ... \stopplaceformula
* + - REFERENCE OPT

```

```

\startplacepairedbox [...,\1,...,] [...,\2,...,] ... \stopplacepairedbox
1 NAME OPT
2 inherits: \setuppairedbox

```

```

\startplacePAIREDBOX [...,\*,...,] ... \stopplacePAIREDBOX
* inherits: \setuppairedbox OPT
instances: legend

```

```

\startplacelegend [...,\*,...,] ... \stopplacelegend
* inherits: \setuppairedbox OPT

```

```

\startpositioning [...,\1,...,] [...,\2,...,] ... \stoppositioning
1 NAME OPT OPT
2 inherits: \setuppositioning

```

```

\startpositionoverlay {...} ... \stoppositionoverlay
* NAME

```

```

\startpositive ... \stoppositive

```

```
\startpostponing [...] ... \stoppostponing
*  [-+]NUMBER      OPT
```

```
\startpostponingnotes ... \stoppostponingnotes
```

```
\startprocessassignmentcommand [...,*=*,...] ... \stopprocessassignmentcommand
*  KEY  = VALUE
```

```
\startprocessassignmentlist [...,*=*,...] ... \stopprocessassignmentlist
*  KEY  = VALUE
```

```
\startprocesscommacommand [...,*=*,...] ... \stopprocesscommacommand
*  COMMAND
```

```
\startprocesscommalist [...,*=*,...] ... \stopprocesscommalist
*  COMMAND
```

```
\startproduct [...] ... \stopproduct
*  FILE *
```

```
\startproduct *. ... \stopproduct
*  FILE *
```

```
\startproject [...] ... \stopproject
*  FILE *
```

```
\startproject *. ... \stopproject
*  FILE *
```

```
\startprotectedcolors ... \stopprotectedcolors
```

```
\startpublication [1] [...,*=2*,...] ... \stoppublication
1  NAME              OPT          OPT
2  tag               = REFERENCE
   category          = TEXT
   k                  = REFERENCE
   t                  = TEXT
```

```
\startrandomized ... \stoprandomized
```

```
\startrawsetups [1] [2] ... \stoprawsetups
1  grid              OPT
2  NAME
```

```
\startrawsetups *. ... \stoprawsetups
*  NAME
```

```
\startreadingfile ... \stopreadingfile
```

```
\startregime [...] ... \stopregime
*  inherits: \enableregime
```

```
\startregister [1] [2] [3] [4] {...+5+...}
1  NAME              OPT          OPT
2  NAME
3  TEXT
4  TEXT PROCESSOR->TEXT
5  INDEX
```

<pre> \startreusableMPgraphic {...} {...<sup>2</sup>...} ... \stopreusableMPgraphic 1  NAME                                OPT 2  KEY </pre>
<pre> \startrightaligned ... \stoprightaligned </pre>
<pre> \startruby [...] ... \stopruby *  NAME </pre>
<pre> \startscript [...] ... \stopscript *  hangul hanzi nihongo ethiopic thai test NAME </pre>
<pre> \startsectionblock [...<sup>1</sup>] [...<sup>2</sup>...<sup>2</sup>...] ... \stopsectionblock 1  NAME                                OPT 2  bookmark = TEXT    inherits: \setupsectionblock </pre>
<pre> \startsectionblockenvironment [...] ... \stopsectionblockenvironment *  NAME </pre>
<pre> \startSECTIONBLOCK [...<sup>*</sup>...<sup>*</sup>...] ... \stopSECTIONBLOCK *  bookmark = TEXT                    OPT    inherits: \setupsectionblock instances: frontmatter bodymatter appendices backmatter </pre>
<pre> \startappendices [...<sup>*</sup>...<sup>*</sup>...] ... \stopappendices *  bookmark = TEXT                    OPT    inherits: \setupsectionblock </pre>
<pre> \startbackmatter [...<sup>*</sup>...<sup>*</sup>...] ... \stopbackmatter *  bookmark = TEXT                    OPT    inherits: \setupsectionblock </pre>
<pre> \startbodymatter [...<sup>*</sup>...<sup>*</sup>...] ... \stopbodymatter *  bookmark = TEXT                    OPT    inherits: \setupsectionblock </pre>
<pre> \startfrontmatter [...<sup>*</sup>...<sup>*</sup>...] ... \stopfrontmatter *  bookmark = TEXT                    OPT    inherits: \setupsectionblock </pre>
<pre> \startsectionlevel [...<sup>1</sup>] [...<sup>2</sup>...<sup>2</sup>...] [...<sup>3</sup>...<sup>3</sup>...] ... \stopsectionlevel 1  NAME                                OPT      OPT      OPT 2  title      = TEXT    bookmark   = TEXT    marking    = TEXT    list       = TEXT    reference   = REFERENCE    ownnumber  = TEXT 3  KEY = VALUE </pre>
<pre> \startSECTION [...<sup>1</sup>...<sup>1</sup>...] [...<sup>2</sup>...<sup>2</sup>...] ... \stopSECTION 1  title      = TEXT                    OPT      OPT    bookmark   = TEXT    marking    = TEXT    list       = TEXT    reference   = REFERENCE    ownnumber  = TEXT 2  KEY = VALUE  instances: part chapter section subsection subsubsection subsubsubsection subsubsubsubsection title subject subsubject subsubsubject subsubsubsubject subsubsubsubsubject </pre>

`\startchapter [...,\u{1}...,...] [...,\u{2}...,...] ... \stopchapter`

```
1 title      = TEXT      OPT
  bookmark   = TEXT
  marking    = TEXT
  list       = TEXT
  reference  = REFERENCE
  ownnumber  = TEXT
2 KEY = VALUE
```

`\startpart [...,\u{1}...,...] [...,\u{2}...,...] ... \stoppart`

```
1 title      = TEXT      OPT
  bookmark   = TEXT
  marking    = TEXT
  list       = TEXT
  reference  = REFERENCE
  ownnumber  = TEXT
2 KEY = VALUE
```

`\startsection [...,\u{1}...,...] [...,\u{2}...,...] ... \stopsection`

```
1 title      = TEXT      OPT
  bookmark   = TEXT
  marking    = TEXT
  list       = TEXT
  reference  = REFERENCE
  ownnumber  = TEXT
2 KEY = VALUE
```

`\startsubject [...,\u{1}...,...] [...,\u{2}...,...] ... \stopsubject`

```
1 title      = TEXT      OPT
  bookmark   = TEXT
  marking    = TEXT
  list       = TEXT
  reference  = REFERENCE
  ownnumber  = TEXT
2 KEY = VALUE
```

`\startsubsection [...,\u{1}...,...] [...,\u{2}...,...] ... \stopsubsection`

```
1 title      = TEXT      OPT
  bookmark   = TEXT
  marking    = TEXT
  list       = TEXT
  reference  = REFERENCE
  ownnumber  = TEXT
2 KEY = VALUE
```

`\startsubsubject [...,\u{1}...,...] [...,\u{2}...,...] ... \stopsubsubject`

```
1 title      = TEXT      OPT
  bookmark   = TEXT
  marking    = TEXT
  list       = TEXT
  reference  = REFERENCE
  ownnumber  = TEXT
2 KEY = VALUE
```

`\startsubsubsection [...,\u{1}...,...] [...,\u{2}...,...] ... \stopsubsubsection`

```
1 title      = TEXT      OPT
  bookmark   = TEXT
  marking    = TEXT
  list       = TEXT
  reference  = REFERENCE
  ownnumber  = TEXT
2 KEY = VALUE
```

`\startsubsubsubject [...,\u{1}...,...] [...,\u{2}...,...] ... \stopsubsubsubject`

```
1 title      = TEXT      OPT
  bookmark   = TEXT
  marking    = TEXT
  list       = TEXT
  reference  = REFERENCE
  ownnumber  = TEXT
2 KEY = VALUE
```

```

\startsubsubsubsection [...,\subsubsub1...,...] [...,\subsubsub2...,...] ... \stopsubsubsubsection
1 title = TEXT OPT OPT
bookmark = TEXT
marking = TEXT
list = TEXT
reference = REFERENCE
ownnumber = TEXT
2 KEY = VALUE

```

```

\startsubsubsubsubject [...,\subsubsub1...,...] [...,\subsubsub2...,...] ... \stopsubsubsubsubject
1 title = TEXT OPT OPT
bookmark = TEXT
marking = TEXT
list = TEXT
reference = REFERENCE
ownnumber = TEXT
2 KEY = VALUE

```

```

\startsubsubsubsubsection [...,\subsubsub1...,...] [...,\subsubsub2...,...] ... \stopsubsubsubsubsection
1 title = TEXT OPT OPT
bookmark = TEXT
marking = TEXT
list = TEXT
reference = REFERENCE
ownnumber = TEXT
2 KEY = VALUE

```

```

\startsubsubsubsubsubject [...,\subsubsub1...,...] [...,\subsubsub2...,...] ... \stopsubsubsubsubsubject
1 title = TEXT OPT OPT
bookmark = TEXT
marking = TEXT
list = TEXT
reference = REFERENCE
ownnumber = TEXT
2 KEY = VALUE

```

```

\starttitle [...,\sub1...,...] [...,\sub2...,...] ... \stoptitle
1 title = TEXT OPT OPT
bookmark = TEXT
marking = TEXT
list = TEXT
reference = REFERENCE
ownnumber = TEXT
2 KEY = VALUE

```

```

\startsetups [...,\sub1...] [...,\sub2...] ... \stopsetups
1 grid OPT
2 NAME

```

```

\startsetups ... .. \stopsetups
* NAME

```

```

\startshift [...,\sub*...] ... \stopshift
* NAME

```

```

\startsidebar [...,\sub1...] [...,\sub2...,...] ... \stopsidebar
1 NAME OPT OPT
2 inherits: \setupsidebar

```

```

\startsimplecolumns [...,\sub*...,...] ... \stopsimplecolumns
* inherits: \setsimplecolumnhsides OPT

```

```

\startspecialitem [...,\sub1...] [...,\sub2...,...] ... \stopspecialitem
1 item OPT OPT
2 REFERENCE

```

$\backslash\text{startspecialitem} [\dots] \dots \backslash\text{stopspecialitem}$ $\ast$ sub its
$\backslash\text{startspecialitem} [\dots] \{\dots\} \dots \backslash\text{stopspecialitem}$ 1 sym ran mar 2 TEXT
$\backslash\text{startsplitformula} \dots \backslash\text{stopsplitformula}$
$\backslash\text{startspread} \dots \backslash\text{stopspread}$
$\backslash\text{startSTARTSTOP} \dots \backslash\text{stopSTARTSTOP}$
$\backslash\text{startstaticMPfigure} \{\dots\} \dots \backslash\text{stopstaticMPfigure}$ $\ast$ NAME
$\backslash\text{startstaticMPgraphic} \{\dots\} \{\dots;\dots\} \dots \backslash\text{stopstaticMPgraphic}$ 1 NAME 2 KEY
$\backslash\text{STARTSTOP} \{\dots\}$ $\ast$ CONTENT
$\backslash\text{startstrictinspectnextcharacter} \dots \backslash\text{stopstrictinspectnextcharacter}$
$\backslash\text{startstructurepageregister} [\dots] [\dots] [\dots;\dots] [\dots;\dots]$ 1 NAME 2 NAME 3 label = NAME keys = TEXT PROCESSOR->TEXT entries = TEXT PROCESSOR->TEXT keys:1 = TEXT keys:2 = TEXT keys:3 = TEXT entries:1 = TEXT entries:2 = TEXT entries:3 = TEXT alternative = TEXT 4 KEY = VALUE
$\backslash\text{startstyle} [\dots;\dots] \dots \backslash\text{stopstyle}$ $\ast$ inherits: \setupstyle
$\backslash\text{startstyle} [\dots] \dots \backslash\text{stopstyle}$ $\ast$ NAME FONT
$\backslash\text{startSTYLE} \dots \backslash\text{stopSTYLE}$
$\backslash\text{startsubformulas} [\dots;\dots] \dots \backslash\text{stopsubformulas}$ $\ast$ + - REFERENCE
$\backslash\text{startsubjectlevel} [\dots] [\dots;\dots] [\dots;\dots] \dots \backslash\text{stopsubjectlevel}$ 1 NAME 2 title = TEXT bookmark = TEXT marking = TEXT list = TEXT reference = REFERENCE ownnumber = TEXT 3 KEY = VALUE
$\backslash\text{startsubsentence} \dots \backslash\text{stopsubsentence}$

<code>\startsubstack ... \stopsubstack</code>
<code>\startsymbolset [.<sup>1</sup>.] [...,<sup>2</sup>...,...] ... \stopsymbolset</code> <code>1 NAME OPT</code> <code>2 font = FONT</code>
<code>\startTABLE [...,<sup>*</sup>...,...] ... \stopTABLE</code> <code>* inherits: \setupTABLE</code>
<code>\startTABLEbody [...,<sup>*</sup>...,...] ... \stopTABLEbody</code> <code>* inherits: \setupTABLE OPT</code>
<code>\startTABLEfoot [...,<sup>*</sup>...,...] ... \stopTABLEfoot</code> <code>* inherits: \setupTABLE OPT</code>
<code>\startTABLEhead [...,<sup>*</sup>...,...] ... \stopTABLEhead</code> <code>* inherits: \setupTABLE OPT</code>
<code>\startTABLEnext [...,<sup>*</sup>...,...] ... \stopTABLEnext</code> <code>* inherits: \setupTABLE OPT</code>
<code>\starttable [ . .<sup>1</sup>. ] [...,<sup>2</sup>...,...] ... \stoptable</code> <code>1 TEMPLATE OPT</code> <code>2 inherits: \setuptables</code>
<code>\starttablehead [.*] ... \stoptablehead</code> <code>* NAME</code>
<code>\starttables [ . .<sup>*</sup>. ] ... \stoptables</code> <code>* TEMPLATE</code>
<code>\starttables [.*] ... \stoptables</code> <code>* NAME</code>
<code>\starttabletail [.*] ... \stoptabletail</code> <code>* NAME</code>
<code>\starttable [ . .<sup>1</sup>. ] [...,<sup>2</sup>...,...] ... \stoptable</code> <code>1 NAME OPT</code> <code>2 inherits: \setuptables</code>
<code>\starttabulate [ . .<sup>1</sup>. ] [...,<sup>2</sup>...,...] ... \stoptabulate</code> <code>1 TEMPLATE OPT OPT</code> <code>2 inherits: \setuptabulate</code>
<code>\starttabulatehead [.*] ... \stoptabulatehead</code> <code>* NAME OPT</code>
<code>\starttabulatetail [.*] ... \stoptabulatetail</code> <code>* NAME OPT</code>
<code>\startTABULATE [.<sup>1</sup>.] [...,<sup>2</sup>...,...] ... \stopTABULATE</code> <code>1 NAME OPT OPT</code> <code>2 inherits: \setuptabulate</code> <code>instances: legend fact</code>
<code>\startfact [ . .<sup>1</sup>. ] [...,<sup>2</sup>...,...] ... \stopfact</code> <code>1 NAME OPT OPT</code> <code>2 inherits: \setuptabulate</code>



`\startlegend [...]1 [...,...2...,...] ... \stoplegend`

1 NAME OPT OPT  
2 inherits: \setuptabulate

`\startTABULATION [...]1 [...,...2...,...] ... \stopTABULATION`

1 NAME OPT OPT  
2 inherits: \setuptabulation

`\starttexcode ... \stoptexcode`

`\starttexdefinition ...1 ...2 ...3 ...4 ...5 ...6 ...7 ... \stoptexdefinition`

1 spaces nospaces OPT OPT OPT OPT OPT OPT  
2 global  
3 unexpanded  
4 expanded  
5 singleempty doubleempty tripleempty quadrupleempty quintupleempty sextupleempty singleargument doubleargument  
tripleargument quadrupleargument quintupleargument sextupleargument  
6 NAME  
7 TEMPLATE

`\starttext ... \stoptext`

`\starttextbackground [...]1 [...,...2...,...] ... \stoptextbackground`

1 NAME OPT  
2 inherits: \setuptextbackground

`\starttextbackgroundmanual ... \stoptextbackgroundmanual`

`\startTEXTBACKGROUND [...,...*...,...] ... \stopTEXTBACKGROUND`

\* inherits: \setuptextbackground OPT

`\starttextcolor [...] ... \stoptextcolor`

\* COLOR

`\starttextcolorintent ... \stoptextcolorintent`

`\starttextflow [...] ... \stoptextflow`

\* NAME

`\starttextrule {...} ... \stoptextrule`

\* TEXT

`\starttokens [...] ... \stoptokens`

\* NAME

`\starttransparent [...] ... \stoptransparent`

\* COLOR

`\starttypescript [...]1 [...]2 [...]3 ... \stoptypescript`

1 serif sans mono math handwriting calligraphy OPT OPT OPT  
2 NAME  
3 size name

`\starttypescriptcollection [...] ... \stoptypescriptcollection`

\* NAME

`\startTYPING [...,...*...,...] ... \stopTYPING`

\* inherits: \setuptyping OPT

instances: typing LUA MP PARSEDXML TEX XML

<pre> \startTYPING [...,*...] ... \stopTYPING *   continue           OPT instances: typing LUA MP PARSEDXML TEX XML </pre>
<pre> \startLUA [...,*...] ... \stopLUA *   continue           OPT </pre>
<pre> \startMP [...,*...] ... \stopMP *   continue           OPT </pre>
<pre> \startPARSEDXML [...,*...] ... \stopPARSEDXML *   continue           OPT </pre>
<pre> \startTEX [...,*...] ... \stopTEX *   continue           OPT </pre>
<pre> \starttyping [...,*...] ... \stoptyping *   continue           OPT </pre>
<pre> \startXML [...,*...] ... \stopXML *   continue           OPT </pre>
<pre> \startLUA [...,*=...,...] ... \stopLUA *   inherits: \setuptyping OPT </pre>
<pre> \startMP [...,*=...,...] ... \stopMP *   inherits: \setuptyping OPT </pre>
<pre> \startPARSEDXML [...,*=...,...] ... \stopPARSEDXML *   inherits: \setuptyping OPT </pre>
<pre> \startTEX [...,*=...,...] ... \stopTEX *   inherits: \setuptyping OPT </pre>
<pre> \starttyping [...,*=...,...] ... \stoptyping *   inherits: \setuptyping OPT </pre>
<pre> \startXML [...,*=...,...] ... \stopXML *   inherits: \setuptyping OPT </pre>
<pre> \startuniqueMPgraphic {...} {...,<sup>2</sup>...} ... \stopuniqueMPgraphic 1  NAME           OPT 2  KEY </pre>
<pre> \startuniqueMPpagegraphic {...} {...,<sup>2</sup>...} ... \stopuniqueMPpagegraphic 1  NAME           OPT 2  KEY </pre>
<pre> \startunpacked ... \stopunpacked </pre>
<pre> \startusableMPgraphic {...} {...,<sup>2</sup>...} ... \stopusableMPgraphic 1  NAME           OPT 2  KEY </pre>
<pre> \startuseMPgraphic {...} {...,<sup>2</sup>...} ... \stopuseMPgraphic 1  NAME           OPT 2  KEY </pre>

<code>\startusemathstyleparameter \.* ... \stopusemathstyleparameter</code> <code>* CSNAME</code>
<code>\startusingbtxs specification [... ] ... \stopusingbtxs specification</code> <code>* NAME</code>
<code>\startvboxregister .*. ... \stopvboxregister</code> <code>* CSNAME NUMBER</code>
<code>\startvboxtohbox ... \stopvboxtohbox</code>
<code>\startvboxtohboxseparator ... \stopvboxtohboxseparator</code>
<code>\startviewerlayer [... ] ... \stopviewerlayer</code> <code>* NAME</code>
<code>\startVIEWERLAYER ... \stopVIEWERLAYER</code>
<code>\startvtopregister .*. ... \stopvtopregister</code> <code>* CSNAME NUMBER</code>
<code>\startxcell [... ] [... ,...<sup>2</sup>... ] ... \stopxcell</code> <code>1 NAME OPT OPT</code> <code>2 nx = NUMBER</code> <code>ny = NUMBER</code> <code>nc = NUMBER</code> <code>nr = NUMBER</code> <code>inherits: \setupxtable</code>
<code>\startxcellgroup [... ] [... ,...<sup>2</sup>... ] ... \stopxcellgroup</code> <code>1 NAME OPT OPT</code> <code>2 inherits: \setupxtable</code>
<code>\startxcolumn [... ] [... ,...<sup>2</sup>... ] ... \stopxcolumn</code> <code>1 NAME OPT OPT</code> <code>2 inherits: \setupxtable</code>
<code>\startxgroup [... ] [... ,...<sup>2</sup>... ] ... \stopxgroup</code> <code>1 NAME OPT OPT</code> <code>2 inherits: \setupxtable</code>
<code>\startxmldisplayverbatim [... ] ... \stopxmldisplayverbatim</code> <code>* NAME</code>
<code>\startxmlinlineverbatim [... ] ... \stopxmlinlineverbatim</code> <code>* NAME</code>
<code>\startxmlraw ... \stopxmlraw</code>
<code>\startxmlsetups [... ] [... ] ... \stopxmlsetups</code> <code>1 grid OPT</code> <code>2 NAME</code>
<code>\startxmlsetups .*. ... \stopxmlsetups</code> <code>* NAME</code>
<code>\startxrow [... ] [... ,...<sup>2</sup>... ] ... \stopxrow</code> <code>1 NAME OPT OPT</code> <code>2 inherits: \setupxtable</code>

$\backslash\text{startxrowgroup}$ [ <sup>1</sup> ...] [ <sup>2</sup> ... <sup>2</sup> ...] $\dots$ $\backslash\text{stopxrowgroup}$ 1 NAME OPT OPT 2 inherits: $\backslash\text{setupxtable}$
$\backslash\text{startxtable}$ [ <sup>*</sup> ... <sup>*</sup> ...] $\dots$ $\backslash\text{stopxtable}$ * inherits: $\backslash\text{setupxtable}$ OPT
$\backslash\text{startxtablebody}$ [ <sup>*</sup> ... <sup>*</sup> ...] $\dots$ $\backslash\text{stopxtablebody}$ * inherits: $\backslash\text{setupxtable}$ OPT
$\backslash\text{startxtablebody}$ [ <sup>*</sup> ...] $\dots$ $\backslash\text{stopxtablebody}$ * NAME OPT
$\backslash\text{startxtablefoot}$ [ <sup>*</sup> ... <sup>*</sup> ...] $\dots$ $\backslash\text{stopxtablefoot}$ * inherits: $\backslash\text{setupxtable}$ OPT
$\backslash\text{startxtablefoot}$ [ <sup>*</sup> ...] $\dots$ $\backslash\text{stopxtablefoot}$ * NAME OPT
$\backslash\text{startxtablehead}$ [ <sup>*</sup> ... <sup>*</sup> ...] $\dots$ $\backslash\text{stopxtablehead}$ * inherits: $\backslash\text{setupxtable}$ OPT
$\backslash\text{startxtablehead}$ [ <sup>*</sup> ...] $\dots$ $\backslash\text{stopxtablehead}$ * NAME OPT
$\backslash\text{startxtablenext}$ [ <sup>*</sup> ... <sup>*</sup> ...] $\dots$ $\backslash\text{stopxtablenext}$ * inherits: $\backslash\text{setupxtable}$ OPT
$\backslash\text{startxtablenext}$ [ <sup>*</sup> ...] $\dots$ $\backslash\text{stopxtablenext}$ * NAME OPT
$\backslash\text{startXTABLE}$ [ <sup>*</sup> ... <sup>*</sup> ...] $\dots$ $\backslash\text{stopXTABLE}$ * inherits: $\backslash\text{setupxtable}$ OPT
$\backslash\text{startxtable}$ [ <sup>*</sup> ...] $\dots$ $\backslash\text{stopxtable}$ * NAME OPT
$\backslash\text{stopline}$ [...] * REFERENCE
$\backslash\text{stopLINENOTE}$ [...] * REFERENCE instances: linenote
$\backslash\text{stoplinenote}$ [...] * REFERENCE
$\backslash\text{stopregister}$ [ <sup>1</sup> ] [ <sup>2</sup> ] 1 NAME 2 NAME
$\backslash\text{stopstructurepageregister}$ [ <sup>1</sup> ] [ <sup>2</sup> ] 1 NAME 2 NAME
$\backslash\text{stretched}$ [ <sup>1</sup> ... <sup>1</sup> ...] $\{\dots\}$ [ <sup>2</sup> ] 1 inherits: $\backslash\text{setupstretched}$ OPT 2 TEXT

<code>\strictdoifelsenextoptional {...} {...}</code> 1 TRUE 2 FALSE
<code>\strictdoifnextoptionalelse {...} {...}</code> 1 TRUE 2 FALSE
<code>\stripcharacter .<sup>1</sup>. \from ... \to \.<sup>3</sup>.</code> 1 CHARACTER 2 TEXT 3 CSNAME
<code>\strippedcsname \.*.</code> * CSNAME
<code>\strippedcsname ...</code> * TEXT
<code>\stripspaces \from .<sup>1</sup>. \to \.<sup>2</sup>.</code> 1 TEXT 2 CSNAME
<code>\structurelistuservariable {...}</code> * KEY
<code>\structurenumber</code>
<code>\structuretitle</code>
<code>\structureuservariable {...}</code> * KEY
<code>\structurevariable {...}</code> * KEY
<code>\strut</code>
<code>\strutdp</code>
<code>\strutgap</code>
<code>\strutht</code>
<code>\struthtdp</code>
<code>\struttedbox {...}</code> * CONTENT
<code>\strutwd</code>
<code>\style [...,<sup>1</sup>...,...] {...}</code> 1 inherits: \setupstyle 2 TEXT
<code>\styleinstance [...]</code> * NAME

<code>\style [...] {...}</code> 1 NAME FONT 2 TEXT
<code>\STYLE {...}</code> * TEXT
<code>\subpagenumber</code>
<code>\subsentence {...}</code> * CONTENT
<code>\substituteincommalist {...} {...} \...</code> 1 TEXT 2 TEXT 3 CSNAME
<code>\subtractfeature [...]</code> * NAME
<code>\subtractfeature {...}</code> * NAME
<code>\swapcounts \... \...</code> 1 CSNAME 2 CSNAME
<code>\swapdimens \... \...</code> 1 CSNAME 2 CSNAME
<code>\swapface</code>
<code>\swapmacros \... \...</code> 1 CSNAME 2 CSNAME
<code>\swaptypeface</code>
<code>\switchstyleonly [...]</code> * rm ss tt hw cg roman serif regular sans sansserif support type teletype mono handwritten calligraphic
<code>\switchstyleonly \...</code> * CSNAME
<code>\switchtobodyfont [...,*...]</code> * inherits: \setupbodyfont
<code>\switchtocolour [...]</code> * COLOR
<code>\switchtointerlinespace [...,<sup>1</sup>...] [...,<sup>2</sup>...]</code> 1 NAME <small>OPT</small> 2 inherits: \setupinterlinespace
<code>\switchtointerlinespace [...,*...]</code> * on off reset auto small medium $\frac{1}{2}$ NUMBER DIMENSION

\switchtointerlinespace [...] * NAME
\symbols <sup>1</sup> [...] <sup>2</sup> [...] 1 NAME OPT 2 NAME
\symbolsreference [...] * REFERENCE
\symbols {...} * NAME
\synchronizeblank
\synchronizeindenting
\synchronizemarking [...] <sup>1</sup> [...] <sup>2</sup> [...] <sup>3</sup> 1 MARK OPT 2 NUMBER 3 keep
\synchronizeoutputstreams [...]*,...] * NAME
\synchronizestrut {...} * yes no auto cap fit line default CHARACTER
\synchronizewhitespace
\synctexblockfilename {...} * FILE
\synctexresetfilename
\synctexsetfilename {...} * FILE
\SYNONYM [...] <sup>1</sup> {...} <sup>2</sup> {...} <sup>3</sup> 1 NAME OPT 2 TEXT 3 CONTENT instances: abbreviation
\abbreviation [...] <sup>1</sup> {...} <sup>2</sup> {...} <sup>3</sup> 1 NAME OPT 2 TEXT 3 CONTENT
\systemlog {...} <sup>1</sup> {...} <sup>2</sup> {...} <sup>3</sup> 1 FILE 2 TEXT 3 TEXT
\systemlogfirst {...} <sup>1</sup> {...} <sup>2</sup> {...} <sup>3</sup> 1 FILE 2 TEXT 3 TEXT

<code>\systemloglast {...} {...} {...}</code> 1    FILE 2    TEXT 3    TEXT
<code>\systemsetups {...}</code> *    NAME
<code>\TABLE</code>
<code>\TaBlE</code>
<code>\TEX</code>
<code>\TeX</code>
<code>\TheNormalizedFontSize</code>
<code>\TransparencyHack</code>
<code>\tabulateautoline</code>
<code>\tabulateautorule</code>
<code>\tabulateline</code>
<code>\tabulaterule</code>
<code>\taggedctxcommand {...}</code> *    COMMAND
<code>\taggedlabeltexts {...} {...} {...}</code> 1    NAME 2    NAME 3    CONTENT
<code>\tbox {...}</code> *    CONTENT
<code>\testandsplitstring ... \at ... \to ... \and ...</code> 1    TEXT 2    TEXT 3    CSNAME 4    CSNAME
<code>\testcolumn [...] [...]</code> 1    NUMBER                    OPT 2    DIMENSION
<code>\testfeature {...} {...}</code> 1    NUMBER 2    CONTENT
<code>\testfeatureonce {...} {...}</code> 1    NUMBER 2    CONTENT



`\testpage [...]1 [...]2`

1 NUMBER OPT  
2 DIMENSION

`\testpageonly [...]1 [...]2`

1 NUMBER OPT  
2 DIMENSION

`\testpagesync [...]1 [...]2`

1 NUMBER OPT  
2 DIMENSION

`\testtokens [...]`

\* NAME

`\tex {...}`

\* CONTENT

`\texdefinition {...}`

\* NAME

`\texsetup {...}`

\* NAME

`\TEXTBACKGROUND {...}`

\* CONTENT

`\textcitation [...]1 [...]2`

1 reference = REFERENCE  
alternative = default category entry short page num textnum year index tag keywords author authoryears authornum  
authoryear  
before = COMMAND  
after = COMMAND  
left = COMMAND  
right = COMMAND  
inherits: \setupbtx  
2 REFERENCE

`\textcitation [...]1 [...]2`

1 default category<sup>OPT</sup> entry short page num textnum year index tag keywords author authoryears authornum authoryear  
2 REFERENCE

`\textcitation [...]1 [...]2`

1 reference = REFERENCE  
alternative = default category entry short page num textnum year index tag keywords author authoryears authornum  
authoryear  
before = COMMAND  
after = COMMAND  
left = COMMAND  
right = COMMAND  
inherits: \setupbtx  
2 KEY = VALUE

`\textcite [...]1 [...]2`

1 reference = REFERENCE  
alternative = default category entry short page num textnum year index tag keywords author authoryears authornum  
authoryear  
before = COMMAND  
after = COMMAND  
left = COMMAND  
right = COMMAND  
inherits: \setupbtx  
2 REFERENCE

<code>\textcite [...]<sup>1</sup> [...]<sup>2</sup></code> 1 default category entry short page num textnum year index tag keywords author authoryears authornum authoryear 2 REFERENCE
<code>\textcite [...]<sup>1</sup> [...]<sup>2</sup> [...]</code> 1 reference = REFERENCE alternative = default category entry short page num textnum year index tag keywords author authoryears authornum authoryear before = COMMAND after = COMMAND left = COMMAND right = COMMAND inherits: \setupbtx 2 KEY = VALUE
<code>\textcontrolsplace</code>
<code>\textflowcollector {...}</code> * NAME
<code>\textmath {...}</code> * CONTENT
<code>\textminus</code>
<code>\textormathchar {...}</code> * NUMBER
<code>\textormathchars {...}</code> * CHARACTER
<code>\textplus</code>
<code>\textreference [...]<sup>1</sup> [...]<sup>2</sup></code> 1 REFERENCE 2 TEXT
<code>\textrule [...]<sup>1</sup> [...]<sup>2</sup></code> 1 top middle <del>bottom</del> <sup>OPT</sup> 2 TEXT
<code>\textvisiblespace</code>
<code>\thainumerals {...}</code> * NUMBER
<code>\thefirstcharacter {...}</code> * TEXT
<code>\thenormalizedbodyfontsize {...}</code> * DIMENSION
<code>\theremainingcharacters {...}</code> * TEXT
<code>\thickspace</code>
<code>\thinrule</code>

`\thinrules [...,.*=.,...]`  
\* inherits: \setuptHthinrules

`\thinspace`

`\thirtoffivearguments {...} {...} {...} {...} {...}`  
1 TEXT  
2 TEXT  
3 TEXT  
4 TEXT  
5 TEXT

`\thirtoffourarguments {...} {...} {...} {...}`  
1 TEXT  
2 TEXT  
3 TEXT  
4 TEXT

`\thirtofsixarguments {...} {...} {...} {...} {...} {...}`  
1 TEXT  
2 TEXT  
3 TEXT  
4 TEXT  
5 TEXT  
6 TEXT

`\thirtofthreearguments {...} {...} {...}`  
1 TEXT  
2 TEXT  
3 TEXT

`\thirtofthreeunexpanded {...} {...} {...}`  
1 TEXT  
2 TEXT  
3 TEXT

`\threedigitrounding {...}`  
\* NUMBER

`\tibetannumerals {...}`  
\* NUMBER

`\tightlayer [...]`  
\* NAME

`\tilde {...}`  
\* CHARACTER

`\tinyfont`

`\tlap {...}`  
\* CONTENT

`\tochar {...}`  
\* e:NAME x:NUMBER d:NUMBER s:NUMBER i:NUMBER n:NAME c:NAME u:NAME a:NAME

`\tolinenote [...]`  
\* REFERENCE

<code>\TOOLTIP [...<sup>1</sup>...<sup>2</sup>...] {...} {...}</code> 1 inherits: \setup <sup>OPT</sup> tooltip 2 TEXT 3 TEXT <b>instances: tooltip</b>
<code>\TOOLTIP [...<sup>1</sup>] {...} {...}</code> 1 left middle <sup>OPT</sup> right 2 TEXT 3 TEXT <b>instances: tooltip</b>
<code>\tooltip [...<sup>1</sup>] {...} {...}</code> 1 left middle <sup>OPT</sup> right 2 TEXT 3 TEXT
<code>\tooltip [...<sup>1</sup>...<sup>2</sup>...] {...} {...}</code> 1 inherits: \setup <sup>OPT</sup> tooltip 2 TEXT 3 TEXT
<code>\topbox {...}</code> * CONTENT
<code>\topleftbox {...}</code> * CONTENT
<code>\toplinebox {...}</code> * CONTENT
<code>\toprightbox {...}</code> * CONTENT
<code>\topskippedbox {...}</code> * CONTENT
<code>\tracecatcodetables</code>
<code>\tracedfontname {...}</code> * FONT
<code>\traceoutputroutines</code>
<code>\tracepositions</code>
<code>\translate [...<sup>*</sup>...<sup>2</sup>...] [...]</code> * LANGUAGE = TEXT <sup>OPT</sup>
<code>\transparencycomponents {...}</code> * COLOR
<code>\transparent [...<sup>1</sup>] {...<sup>2</sup>}</code> 1 COLOR 2 CONTENT
<code>\triplebond</code>

\truefilename {...} * FILE
\truefontname {...} * FONT
\ttraggedright
\twodigitrounding {...} * NUMBER
\tx
\txx
\typ [..., <sup>1</sup> ..., <sup>2</sup> ...] {...} 1 inherits: \setuptype 2 CONTENT
\type [..., <sup>1</sup> ..., <sup>2</sup> ...] {...} 1 inherits: \setuptype 2 CONTENT
\typebuffer [..., <sup>1</sup> ...] [..., <sup>2</sup> ..., <sup>3</sup> ...] 1 BUFFER OPT OPT 2 inherits: \setuptyping
\typeBUFFER [..., <sup>1</sup> ..., <sup>2</sup> ...] * inherits: \setuptyping
\typedefinedbuffer [..., <sup>1</sup> ...] [..., <sup>2</sup> ..., <sup>3</sup> ...] 1 BUFFER OPT OPT 2 inherits: \setuptyping
\typeface
\typefile [..., <sup>1</sup> ...] [..., <sup>2</sup> ..., <sup>3</sup> ...] {...} 1 NAME OPT OPT 2 inherits: \setuptyping 3 FILE
\typeinlinebuffer [..., <sup>1</sup> ...] [..., <sup>2</sup> ..., <sup>3</sup> ..., <sup>4</sup> ...] 1 BUFFER OPT OPT 2 inherits: \setuptype
\typescriptone
\typescriptprefix {...} * NAME
\typescriptthree
\typescripttwo
\typesetbuffer [..., <sup>1</sup> ...] [..., <sup>2</sup> ..., <sup>3</sup> ..., <sup>4</sup> ...] 1 * BUFFER OPT OPT 2 inherits: \setupexternalfigure

$\backslash$ typesetfile [...] [...] [...] [...] [...] 1 NAME FILE OPT OPT 2 FILE TEXT 3 inherits: \setupexternalfigure
$\backslash$ type [...] [...] << [...] >> 1 inherits: \setuptype 2 ANGLES
$\backslash$ TYPE [...] [...] { [...] } 1 inherits: \setuptype 2 CONTENT
$\backslash$ TYPE [...] [...] << [...] >> 1 inherits: \setuptype 2 ANGLES
$\backslash$ typ [...] [...] << [...] >> 1 inherits: \setuptype 2 ANGLES
$\backslash$ uconvertnumber { [...] } { [...] } 1 inherits: \convertnumber 2 NUMBER
$\backslash$ uedcatcodecommand \ [...] [...] { [...] } 1 CSNAME 2 CHARACTER NUMBER 3 COMMAND
$\backslash$ undefinevalue { [...] } * NAME
$\backslash$ undepthed { [...] } * CONTENT
$\backslash$ underset { [...] } { [...] } 1 TEXT 2 TEXT
$\backslash$ undoassign [...] [...] [...] 1 TEXT 2 KEY = VALUE
$\backslash$ unexpandeddocumentvariable { [...] } * KEY
$\backslash$ unhhbox [...] \with { [...] } 1 CSNAME NUMBER 2 COMMAND
$\backslash$ unihex { [...] } * NUMBER
$\backslash$ uniqueMPgraphic { [...] } { [...] [...] [...] } 1 NAME OPT 2 KEY = VALUE
$\backslash$ uniqueMPpagegraphic { [...] } { [...] [...] [...] } 1 NAME OPT 2 KEY = VALUE







`\useexternaldocument [...]1 [...]2 [...]3`

1 NAME  
2 FILE  
3 TEXT

OPT

`\useexternalfigure [...]1 [...]2 [...]3 [...,...]4 [...]`

1 NAME  
2 FILE  
3 NAME  
4 inherits: \setupexternalfigure

OPT

OPT

`\useexternalrendering [...]1 [...]2 [...]3 [...]4`

1 NAME  
2 NAME  
3 FILE  
4 auto embed

`\useexternalsoundtrack [...]1 [...]2`

1 NAME  
2 FILE

`\usefigurebase [...]`

\* reset FILE

`\usefile [...]1 [...]2 [...]3`

1 NAME  
2 FILE  
3 TEXT

OPT

`\usegridparameter \*...`

\* CSNAME

`\useindentingparameter \*...`

\* CSNAME

`\useindentnextparameter \*...`

\* CSNAME

`\useinterlinespaceparameter \*...`

\* CSNAME

`\useJSscripts [...]1 [...]2 [...]`

1 FILE  
2 NAME

OPT

`\uselanguageparameter \*...`

\* CSNAME

`\uselua module [...]`

\* FILE

`\useMPenvironmentbuffer [...]`

\* NAME

`\useMPgraphic {...}1 {...,2...}`

1 NAME  
2 KEY = VALUE

OPT

`\useMPlibrary [...]`

\* FILE

<code>\useMPPrun {...} {...}</code> 1 NAME 2 NUMBER
<code>\useMPvariables [...] [...<sup>2</sup>,...]</code> 1 NAME 2 KEY
<code>\usemathstyleparameter \*..</code> * CSNAME
<code>\usemodule [...<sup>1</sup>] [...<sup>2</sup>,...] [...<sup>3</sup>,...]</code> 1 m p s x t OPT OPT 2 FILE 3 KEY = VALUE
<code>\usepath [...*,...]</code> * PATH
<code>\useproduct [...*]</code> * FILE
<code>\useprofileparameter \*..</code> * CSNAME
<code>\useproject [...*]</code> * FILE
<code>\userreferenceparameter \*..</code> * CSNAME
<code>\userpagenumber</code>
<code>\usesetupsparameter \*..</code> * CSNAME
<code>\usestaticMPfigure [...<sup>1</sup>,...<sup>2</sup>,...] [...<sup>3</sup>,...]</code> 1 inherits: \setupscale OPT OPT 2 NAME
<code>\usesubpath [...*,...]</code> * PATH
<code>\usesymbols [...*]</code> * FILE
<code>\usetextmodule [...<sup>1</sup>] [...<sup>2</sup>,...] [...<sup>3</sup>,...]</code> 1 m p s x t OPT OPT 2 FILE 3 KEY = VALUE
<code>\usetypescript [...<sup>1</sup>] [...<sup>2</sup>] [...<sup>3</sup>]</code> 1 serif sans mono math handwriting calligraphy casual all 2 NAME fallback default dtp simple 3 size name
<code>\usetypescriptfile [...*]</code> * reset FILE

`\useURL [...]1 [...]2 [...]3 [...]4`  
1 NAME OPT OPT  
2 URL  
3 FILE  
4 TEXT

`\useurl [...]1 [...]2 [...]3 [...]4`  
1 NAME OPT OPT  
2 URL  
3 FILE  
4 TEXT

`\usezipfile [...]1 [...]2`  
1 FILE OPT  
2 FILE

`\utfchar {...}`  
\* NUMBER

`\utflower {...}`  
\* TEXT

`\utfupper {...}`  
\* TEXT

`\utilityregisterlength`

`\VerboseNumber {...}`  
\* NUMBER

`\vboxreference [...]1,... {...}2`  
1 REFERENCE  
2 CONTENT

`\vec {...}`  
\* CHARACTER

`\verbatim {...}`  
\* CONTENT

`\verbatimstring {...}`  
\* CONTENT

`\verbosenummer {...}`  
\* NUMBER

`\version [...]`  
\* concept file temporary final NAME

`\verticalgrowingbar [...]*...]`  
\* inherits: \setuppositionbar

`\verticalpositionbar [...]*...]`  
\* inherits: \setuppositionbar

`\veryraggedcenter`

`\veryraggedleft`

<code>\veryraggedright</code>
<code>\vglue ...</code> <code>* DIMENSION</code>
<code>\viewerlayer [...]<sup>1</sup> {...}<sup>2</sup></code> <code>1 NAME</code> <code>2 CONTENT</code>
<code>\vl [...]</code> <code>* NUMBER</code>
<code>\vphantom {...}</code> <code>* CONTENT</code>
<code>\vpos {...}<sup>1</sup> {...}<sup>2</sup></code> <code>1 NAME</code> <code>2 CONTENT</code>
<code>\vsmash {...}</code> <code>* CONTENT</code>
<code>\vsmashbox ...</code> <code>* CSNAME NUMBER</code>
<code>\vsmashed {...}</code> <code>* CONTENT</code>
<code>\vspace [...]<sup>1</sup> [...]<sup>2</sup></code> <code>1 NAME OPT OPT</code> <code>2 NAME</code>
<code>\vspacing [...]*...]</code> <code>* preference same<sup>ST</sup>page max force enable disable nowhite packed back overlay always weak strong default before inbetween after fixed flexible none small medium big line halfline quarterline formula white height depth standard NUMBER*small NUMBER*medium NUMBER*big NUMBER*line NUMBER*halfline NUMBER*quarterline NUMBER*formula NUMBER*white NUMBER*height NUMBER*depth category:NUMBER order:NUMBER penalty:NUMBER DIMENSION NAME</code>
<code>\WEEKDAY {...}</code> <code>* NUMBER</code>
<code>\WidthSpanningText {...}<sup>1</sup> {...}<sup>2</sup> {...}<sup>3</sup></code> <code>1 TEXT</code> <code>2 DIMENSION</code> <code>3 FONT</code>
<code>\WORD {...}</code> <code>* TEXT</code>
<code>\WORDS {...}</code> <code>* TEXT</code>
<code>\Word {...}</code> <code>* TEXT</code>
<code>\Words {...}</code> <code>* TEXT</code>

<code>\wdofstring {...}</code> * TEXT
<code>\weekday {...}</code> * NUMBER
<code>\widthofstring {...}</code> * TEXT
<code>\widthspanningtext {...} {...} {...}</code> 1 TEXT 2 DIMENSION 3 FONT
<code>\withoutpt {...}</code> * DIMENSION
<code>\word {...}</code> * TEXT
<code>\wordright [...] {...}</code> 1 right DIMENSION 2 CONTENT
<code>\words {...}</code> * TEXT
<code>\wordtonumber {...} {...}</code> 1 one two three four five 2 TEXT
<code>\writebetweenlist [...] [...,...<sup>2</sup>...,...] {...<sup>3</sup>}</code> 1 LIST 2 inherits: \setuplist 3 COMMAND
<code>\writadatatolist [...] [...,...<sup>2</sup>...,...] [...,...<sup>3</sup>...,...]</code> 1 LIST 2 inherits: \setuplist 3 KEY = VALUE
<code>\writestatus {...} {...<sup>2</sup>}</code> 1 TEXT 2 TEXT
<code>\writetolist [...] [...,...<sup>2</sup>...,...] {...<sup>3</sup>} {...<sup>4</sup>}</code> 1 LIST 2 inherits: \setuplist 3 NUMBER 4 TEXT
<code>\XETEX</code>
<code>\XeTeX</code>
<code>\xdefconvertedargument \... {...<sup>2</sup>}</code> 1 CSNAME 2 TEXT

<code>\xmladdindex {...}</code> *    NODE
<code>\xmlafterdocumentsetup {...} {...} {...}</code> 1    NAME 2    SETUP 3    SETUP
<code>\xmlaftersetup {...} {...}</code> 1    SETUP 2    SETUP
<code>\xmlall {...} {...}</code> 1    NODE 2    LPATH
<code>\xmlappenddocumentsetup {...} {...}</code> 1    NAME 2    SETUP
<code>\xmlappendsetup {...}</code> *    SETUP
<code>\xmlapplyselectors {...}</code> *    NODE
<code>\xmlatt {...} {...}</code> 1    NODE 2    NAME
<code>\xmlattdef {...} {...} {...}</code> 1    NODE 2    NAME 3    TEXT
<code>\xmlattribute {...} {...} {...}</code> 1    NODE 2    LPATH 3    NAME
<code>\xmlattributedef {...} {...} {...} {...}</code> 1    NODE 2    LPATH 3    NAME 4    TEXT
<code>\xmlbadinclusions {...}</code> *    NODE
<code>\xmlbeforedocumentsetup {...} {...} {...}</code> 1    NAME 2    SETUP 3    SETUP
<code>\xmlbeforesetup {...} {...}</code> 1    SETUP 2    SETUP
<code>\xmlchainatt {...} {...}</code> 1    NODE 2    NAME

\xmlchainattdef {...} {...} {...}

1 NODE  
2 NAME  
3 TEXT

\xmlchecknamespace {...} {...}

1 NODE  
2 NAME

\xmlcommand {...} {...} {...}

1 NODE  
2 LPATH  
3 XMLSETUP

\xmlconcat {...} {...} {...}

1 NODE  
2 LPATH  
3 TEXT

\xmlconcatrange {...} {...} {...} {...} {...}

1 NODE  
2 LPATH  
3 TEXT  
4 FIRST  
5 LAST

\xmlcontext {...} {...}

1 NODE  
2 LPATH

\xmlcount {...}

\* NODE

\xmldefaulttotext {...}

\* NODE

\xmldirectives {...}

\* NODE

\xmldirectivesafter {...}

\* NODE

\xmldirectivesbefore {...}

\* NODE

\xmldisplayverbatim {...}

\* NODE

\xmldoif {...} {...} {...}

1 NODE  
2 LPATH  
3 TRUE

\xmldoifatt {...} {...}

1 NODE  
2 TRUE

\xmldoifelse {...} {...} {...} {...}

1 NODE  
2 LPATH  
3 TRUE  
4 FALSE

`\xmldoifelseatt {...} {...} {...}`

1 NODE  
2 TRUE  
3 FALSE

`\xmldoifelseempty {...} {...} {...} {...}`

1 NODE  
2 LPATH  
3 TRUE  
4 FALSE

`\xmldoifelseselfempty {...} {...} {...}`

1 NODE  
2 TRUE  
3 FALSE

`\xmldoifelsestext {...} {...} {...} {...}`

1 NODE  
2 LPATH  
3 TRUE  
4 FALSE

`\xmldoifelsevalue {...} {...} {...} {...}`

1 CATEGORY  
2 NAME  
3 TRUE  
4 FALSE

`\xmldoifnot {...} {...} {...}`

1 NODE  
2 LPATH  
3 TRUE

`\xmldoifnotatt {...} {...}`

1 NODE  
2 TRUE

`\xmldoifnotselfempty {...} {...}`

1 NODE  
2 TRUE

`\xmldoifnottext {...} {...} {...}`

1 NODE  
2 LPATH  
3 TRUE

`\xmldoifselfempty {...} {...}`

1 NODE  
2 TRUE

`\xmldoiftext {...} {...} {...}`

1 NODE  
2 LPATH  
3 TRUE

`\xmlelement {...} {...}`

1 NODE  
2 NUMBER

`\xmlfilter {...} {...}`

1 NODE  
2 LPATH



<code>\xmlfirst {...} {...}</code> 1    NODE 2    LPATH
<code>\xmlflush {...}</code> *    NODE
<code>\xmlflushcontext {...}</code> *    NODE
<code>\xmlflushdocumentsetups {...} {...}</code> 1    NAME 2    SETUP
<code>\xmlflushlinewise {...}</code> *    NODE
<code>\xmlflushpure {...}</code> *    NODE
<code>\xmlflushspacewise {...}</code> *    NODE
<code>\xmlflushtext {...}</code> *    NODE
<code>\xmlinclude {...} {...} {...}</code> 1    NODE 2    LPATH 3    NAME
<code>\xmlinclusion {...}</code> *    NODE
<code>\xmlinclusions {...}</code> *    NODE
<code>\xmlinfo {...}</code> *    NODE
<code>\xmlinjector {...}</code> *    NAME
<code>\xmlinlineprettyprint {...} {...}</code> 1    NODE 2    mp lua xml parsed-xml nested tex context none NAME
<code>\xmlinlineprettyprinttext {...} {...}</code> 1    NODE 2    mp lua xml parsed-xml nested tex context none NAME
<code>\xmlinlineverbatim {...}</code> *    NODE
<code>\xmlinstalldirective {...} {...}</code> 1    NAME 2    CSNAME

<code>\xmllast {...} {...}</code> 1    NODE 2    LPATH
<code>\xmllastatt</code>
<code>\xmllastmatch</code>
<code>\xmllastpar</code>
<code>\xmlloadbuffer {...} {...} {...}</code> 1    BUFFER 2    NAME 3    XMLSETUP
<code>\xmlloaddata {...} {...} {...}</code> 1    NAME 2    TEXT 3    XMLSETUP
<code>\xmlloaddirectives {...}</code> *    FILE
<code>\xmlloadfile {...} {...} {...}</code> 1    NAME 2    FILE 3    XMLSETUP
<code>\xmlloadonly {...} {...} {...}</code> 1    NAME 2    FILE 3    XMLSETUP
<code>\xmlmain {...}</code> *    NAME
<code>\xmlmapvalue {...} {...} {...}</code> 1    CATEGORY 2    NAME 3    TEXT
<code>\xmlname {...}</code> *    NODE
<code>\xmlnamespace {...}</code> *    NODE
<code>\xmlnonspace {...} {...}</code> 1    NODE 2    LPATH
<code>\xmlpar {...} {...}</code> 1    NODE 2    NAME
<code>\xmlparam {...} {...} {...}</code> 1    NODE 2    LPATH 3    NAME

<code>\xmlpath {...}</code> *    NODE
<code>\xmlpos {...}</code> *    NODE
<code>\xmlposition {...} {...} {...}</code> 1    NODE 2    LPATH 3    NUMBER
<code>\xmlprependdocumentsetup {...} {...}</code> 1    NAME 2    SETUP
<code>\xmlprependsetup {...}</code> *    SETUP
<code>\xmlprettyprint {...} {...}</code> 1    NODE 2    mp lua xml parsed-xml nested tex context none NAME
<code>\xmlprettyprinttext {...} {...}</code> 1    NODE 2    mp lua xml parsed-xml nested tex context none NAME
<code>\xmlprocessbuffer {...} {...} {...}</code> 1    BUFFER 2    NAME 3    XMLSETUP
<code>\xmlprocessdata {...} {...} {...}</code> 1    NAME 2    TEXT 3    XMLSETUP
<code>\xmlprocessfile {...} {...} {...}</code> 1    NAME 2    FILE 3    XMLSETUP
<code>\xmlpure {...} {...}</code> 1    NODE 2    LPATH
<code>\xmlraw {...}</code> *    NODE
<code>\xmlrefatt {...} {...}</code> 1    NODE 2    NAME
<code>\xmlregistereddokumentsetups {...} {...}</code> 1    NAME 2    SETUP
<code>\xmlregisteredsetups</code>
<code>\xmlregisterns {...} {...}</code> 1    NAME 2    URL

```
\xmlremapname {...} {...} {...} {...}
1  NODE
2  LPATH
3  NAME
4  NAME
```

```
\xmlremapnamespace {...} {...} {...}
1  NODE
2  NAME
3  NAME
```

```
\xmlremovedocumentsetup {...} {...}
1  NAME
2  SETUP
```

```
\xmlremovesetup {...}
*  SETUP
```

```
\xmlresetdocumentsetups {...}
*  NAME
```

```
\xmlresetinjectors
```

```
\xmlresetsetups {...}
*  NAME
```

```
\xmlsave {...} {...}
1  NODE
2  FILE
```

```
\xmlsetatt {...} {...} {...}
1  NODE
2  NAME
3  TEXT
```

```
\xmlsetAttribute {...} {...} {...} {...}
1  NODE
2  LPATH
3  NAME
4  TEXT
```

```
\xmlsetentity {...} {...}
1  NAME
2  TEXT
```

```
\xmlsetfunction {...} {...} {...}
1  NODE
2  LPATH
3  LUAFUNCTION
```

```
\xmlsetinjectors [...]*...]
*  NAME
```

```
\xmlsetpar {...} {...} {...}
1  NODE
2  NAME
3  TEXT
```

```
\xmlsetparam {...} {...} {...} {...}
1  NODE
2  LPATH
3  NAME
4  TEXT
```

`\xmlsetsetup {...} {...} {...}`

1 NAME  
2 LPATH  
3 SETUP

`\xmlsetup {...} {...}`

1 NODE  
2 SETUP

`\xmlshow {...}`

\* NODE

`\xmlsnippet {...} {...}`

1 NODE  
2 NUMBER

`\xmlstrip {...} {...}`

1 NODE  
2 LPATH

`\xmlstriptolines {...} {...}`

1 NODE  
2 LPATH

`\xmlstripped {...} {...}`

1 NODE  
2 LPATH

`\xmlstrippedtolines {...} {...}`

1 NODE  
2 LPATH

`\xmltag {...}`

\* NODE

`\xmltexentity {...} {...}`

1 NAME  
2 TEXT

`\xmltext {...} {...}`

1 NODE  
2 LPATH

`\xmltobuffer {...} {...} {...}`

1 NODE  
2 LPATH  
3 BUFFER

`\xmltobufferverbose {...} {...} {...}`

1 NODE  
2 LPATH  
3 BUFFER

`\xmltofile {...} {...} {...}`

1 NODE  
2 LPATH  
3 FILE

`\xmlvalue {...} {...} {...}`

1 CATEGORY  
2 NAME  
3 TEXT

`\xmlverbatim {...}`

\*    NODE

`\xsplitstring \.1. {..2.}`


1    CSNAME

2    TEXT

`\xypos {...}`

\*    NAME



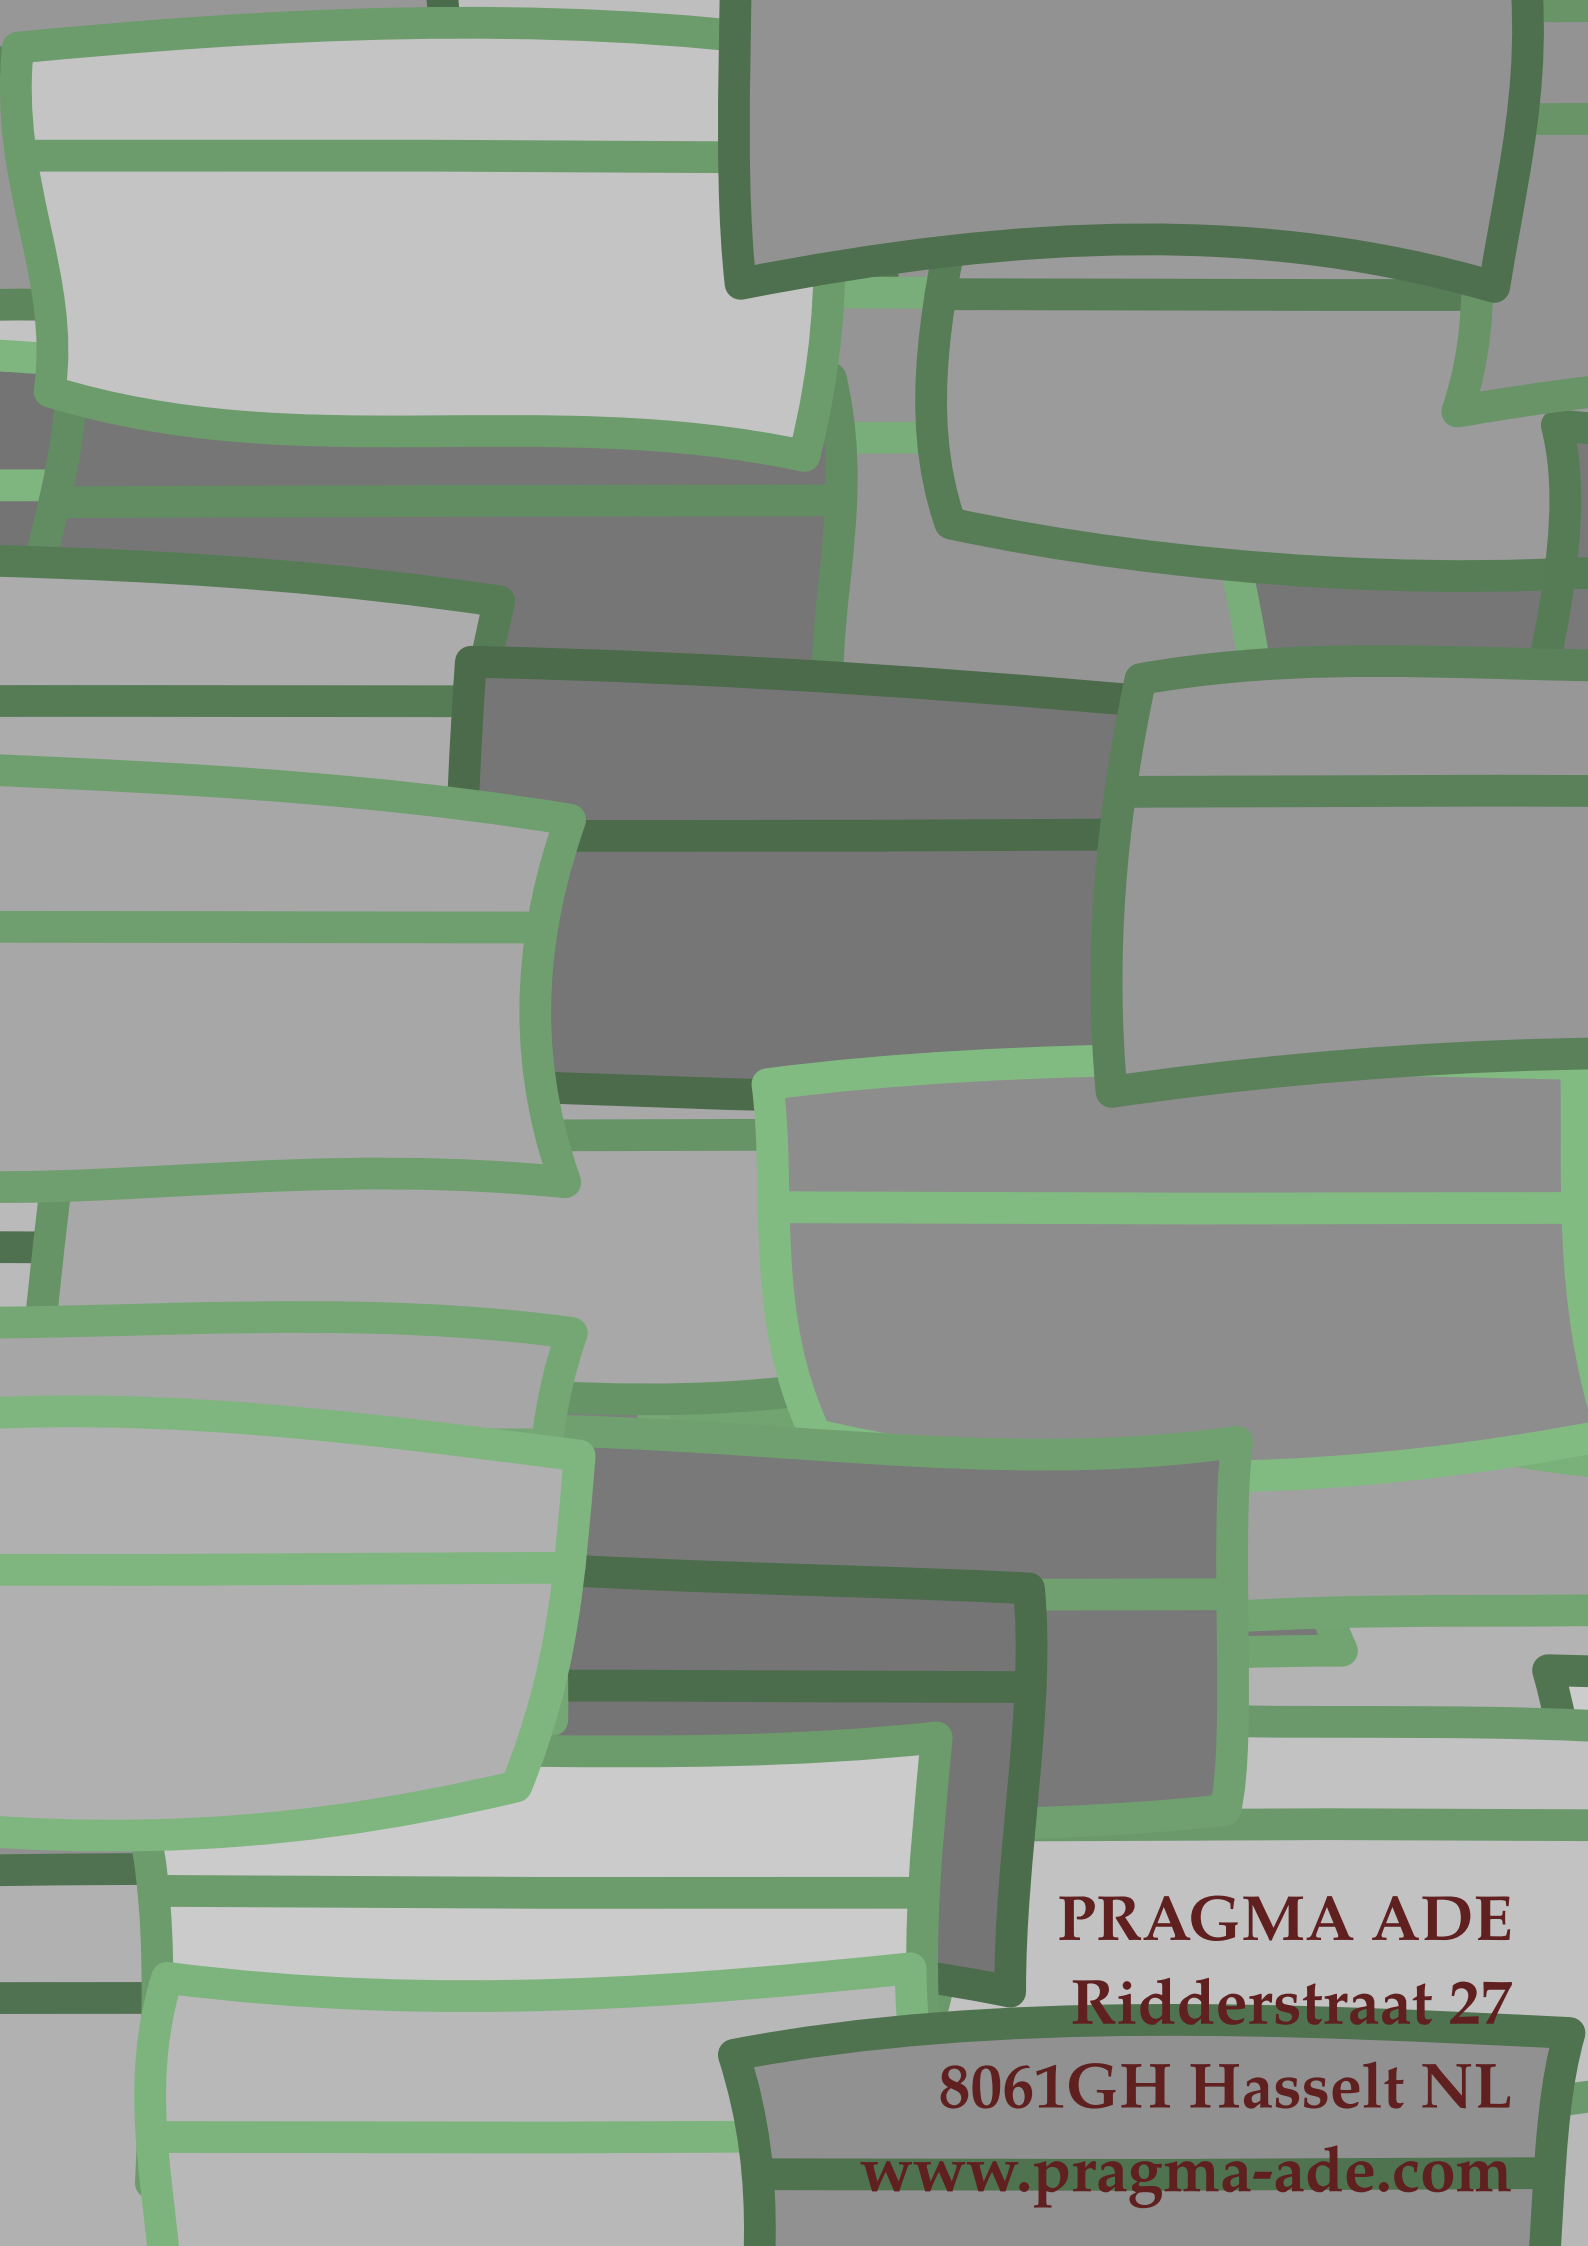

**PRAGMA ADE**

**Ridderstraat 27**

**8061GH Hasselt NL**

**[www.pragma-ade.com](http://www.pragma-ade.com)**